

Material Handling & Industrial Storage Solutions



GILLIS • JARKE[®]

EXPECT MORE

SFG

STORAGE PRODUCTS GROUP

SPG brings greater organization to your organization with material handling systems from Gillis-Jarke.

Today, more than ever, you need to maximize the value of every square inch of space in your facilities. To achieve this, you need material handling and storage solutions that are efficient, reliable, economical, durable, proven, and designed for maximum safety.

Gillis-Jarke, two of the most trusted brands in the business, offer you all of this and more. All brought to you by SPG, a world leader in material handling and storage solutions, engineering and innovation.

In warehouses, factories, distribution centers, and backrooms throughout North America, you will find Gillis-Jarke products driving greater productivity and profitability in key facets of our customers' operations.

For more than half a century, businesses have turned to us for state-of-the-art storage and material handling solutions. Today, the same high level of quality, value, versatility, and unequalled service is available to you in the broadest product line on the market.

Within this catalog you will find the systems and solutions you're looking for to maximize your storage space, protect your goods, manage inventory, enhance the flow of materials, increase accessibility, lower costs, and boost efficiency.

While all the products featured in this catalog are standard items, Gillis-Jarke brings to the market unsurpassed engineered product capabilities to transform difficult applications into custom storage and material handling solutions.

And, if you need a solution fast, be sure to look for our "QUICK SHIP" designation with key products. These items can be shipped within 72 hours to help meet any emergency need.*

You can Expect More from SPG and our Gillis-Jarke line. More performance. More durability. More innovation. More quality. More economy. Everything you need to get more out of and into every square inch of your space. To order from this catalog and put Gillis-Jarke to work for you, contact your dealer today.

*Subject to inventory levels.



STORAGE RACKS 4

PROTECTIVE RAIL SYSTEMS 30

LADDERS 35

PLATFORMS 45

CARTS 49

GAS CYLINDER STORAGE 56

PALLET TRUCKS 59

LIFT EQUIPMENT 67

SHELVING SYSTEMS 77

STAINLESS STEEL TABLES 93

When it comes to solving your storage problems, we don't just offer you off the shelf ideas.

It's not just what Jarke storage racks will hold that sets them apart. It's how they hold up. Rugged, durable, and versatile, Jarke storage racks from SPG offer you years of reliable service in even the toughest of applications.

The Jarke storage rack line also offers you a broad assortment designed to hold a variety of load capacities and materials. In addition, Jarke offers modular systems that allow you to tailor your racks to your current needs...with the flexibility of expanding your system as your needs grow and change.

Within the broad Jarke line are proven storage rack solutions that include:

- Cantilever racks that are ideal for storing flat materials and unwieldy items and come in all sizes and strengths — from light to medium to heavy load capacities — to meet the most demanding applications...plus, many of our cantilever racks can be shipped within 72 hours with our Quick Ship program
- Bar storage racks that are perfect for tool rooms, maintenance areas, machine centers, storage areas, and as POP displays

- Stacking racks in a wide variety of configurations that maximize your floor space as they minimize clutter anywhere throughout your plant or warehouse
- Pallet rack systems that feature fast, easy assembly and rugged construction to stand up to the toughest conditions
- Specialty racks including EZ-Glide racks that feature 100% full extension roll-out shelving, heavy duty reel racks that can hold up to 10,000 lbs. and drum storage racks that deliver compact, high-density storage of 55 gallon drums

Expect More...

Remember, when it comes to durability, quality, and value, other storage rack systems just don't stack up. You can Expect More and get more from Jarke storage racks from SPG. Keep reading for more details on these tough, proven storage rack systems.


To place an order, contact your dealer today!




Minitree® Light Duty Cantilever Racks

This light-duty adjustable arm cantilever rack is especially suited for improving work area appearance and organization of light weight materials. The Minitree™ efficiently stores plastic, conduit, extrusions, hydraulic tubing and similar light weight materials.

- 250 lbs. capacity per arm
- Units can be configured as single or double arm racks
- Single column unit takes only 36" x 18¼" of floor space
- Complete unit includes 2 columns (with either single-sided or double-sided bases), 1 brace set, 14 arms plus hardware
- Features 7 pairs of adjustable arms for storing long and short materials
- 875 lb. capacity per column per side*
- 12" Arm includes bolt on lip; arm is adjustable on 1½" on centers
- Ships unassembled (KD)

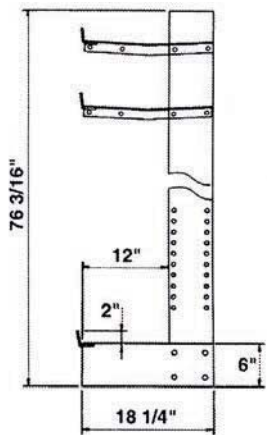

Single Arm Column

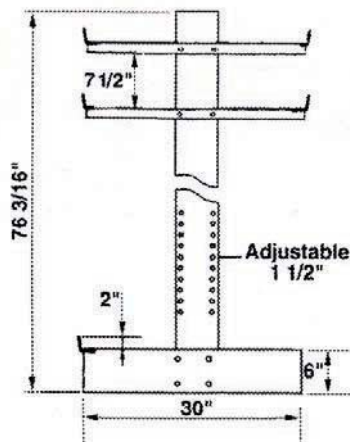

Double Arm Column



Minitree™ Cantilever Rack

| Model No. | Description | Ht. (In.) | Arm Length (In.) | Capacity Per Arm (Lbs.) | Base Length (In.) | No. of Arms | Capacity Per Unit (Lbs.) | Wt. (Lbs.) |
|-----------------------|------------------------------------|-----------------------------------|------------------|-------------------------|--------------------------------|-------------|--------------------------|------------|
| Complete Units | | | | | | | | |
| MT251CS36 | Single Arm Column Units | 76 ³ / ₁₆ " | 12 | 250 | 18 ¹ / ₄ | 14 | 3,500 | 165 |
| MT251CD36 | Double Arm Column Units | 76 ³ / ₁₆ " | 12 | 250 | 30 | 14 double | 7,000 | 215 |
| Components | | | | | | | | |
| MT251CS | 7' Single Column & Base w/hardware | — | — | — | 18 ¹ / ₄ | — | — | 41 |
| MT251CD | 7' Double Column & Base w/hardware | — | — | — | 30 | — | — | 46 |
| MT251AS12 | 12' Single Arm w/Lip plus hardware | — | — | — | — | — | — | 3.7 |
| MT251AD12 | 12' Double Arm w/Lip plus hardware | — | — | — | — | — | — | 6.6 |
| MT251236 | 3' Brace Set w/hardware | — | — | — | — | — | — | 31 |

Do not exceed column capacities. Column capacity rating does not include base. Double column is twice capacity shown.

Quiktree®

This rack is a light-medium duty rack that easily stores and organizes evenly distributed loads. Add-on feature allows the formation of complete storage rows. Begin with a starter unit, and join add-on units to reach desired length.

- 500 lb. capacity per arm (evenly distributed)
- Available in starter or add-on units
- Single or Double sided units
- Two different brace lengths 3' or 6'
- Adjustable 14" arms have end stops that mount up or flush
- Column height 7'
- Single sided unit has 14 arms, Double sided unit 28 arms
- Arm adjusts on 1½" centers tilt up at approx. 5°
- Column capacity 3,500 lbs. per side (not including base)
- Ships unassembled (KD)

Call about our
QUICK SHIP
program



Quiktree® Cantilever Rack

| Model No. | Description | Ht. (Ft.) | Arm Length (In.) | Capacity (Lbs.) | Base Length (In.) | No. of Arms | Brace Set Width | Capacity Per Unit (Lbs.) | Wt. (Lbs.) |
|-----------------------|---|-----------|------------------|-----------------|-------------------|-------------|-----------------|--------------------------|------------|
| Complete Units | | | | | | | | | |
| QT501S36 | Starter Unit - Single-Sided Base Column | 7 | 14 | 500 | 21 | 14 | 3' | 3,500 | 237 |
| QT501S72 | Starter Unit - Single-Sided Base Column | 7 | 14 | 500 | 21 | 14 | 6' | 3,500 | 265 |
| QT501D36 | Starter Unit - Double-Sided Base Column | 7 | 14 | 500 | 34 | 28 | 3' | 7,000 | 345 |
| QT501D72 | Starter Unit - Double-Sided Base Column | 7 | 14 | 500 | 34 | 28 | 6' | 7,000 | 363 |
| QT501S36-A | Add-On Unit - Single-Sided Base Column | 7 | 14 | 500 | 21 | 7 | 3' | 3,500 | 135 |
| QT501S72-A | Add-On Unit - Single-Sided Base Column | 7 | 14 | 500 | 21 | 7 | 6' | 3,500 | 153 |
| QT501D36-A | Add-On Unit - Double-Sided Base Column | 7 | 14 | 500 | 34 | 14 | 3' | 7,000 | 189 |
| QT501D72-A | Add-On Unit - Double-Sided Base Column | 7 | 14 | 500 | 34 | 14 | 6' | 7,000 | 207 |
| Components | | | | | | | | | |
| QT500CS | 7' Single Column and Base w/hardware | — | — | — | — | — | — | — | 67 |
| QT500CD | 7' Double Column and Base w/hardware | — | — | — | — | — | — | — | 86 |
| QT501B36 | 3' Brace Set (set of 2) w/hardware | — | — | — | — | — | — | — | 33 |
| QT501B72 | 6' Brace Set (set of 2) w/hardware | — | — | — | — | — | — | — | 51 |
| QT500A14 | 14' Arm with Cap and Bolts | — | — | — | — | — | — | — | 5 |

Do not exceed column capacities. Column capacity rating does not include base. Double column is twice capacity shown.

Button-On®


US Patent No. 3,164,255

Button-On lets you load up to 2,000 lbs. at one time with a lift truck or manually. Provides an adjustable unit with as little as two columns, or assembles into a continuous system for growth. Arms "button" into position and adjust on 4" centers. 700 lbs. to 1,000 lbs. capacity per arm. Column capacity 12,000 lbs. per column per side. Unique inclined arm with 18° slope, buttons in place. Ideal for storing pipe, tubing, lumber and bar stock. Available in starter and add-on units.



Starter and Add-On Units

| Height (Ft.) | Arm Length | Capacity Per Arm (Lbs.) | Base Length (In.) | No. Of Arms | Brace Set Width | Capacity Per Unit (Lbs.) | Starter Model No. | Wt. (Lbs.) | No. Of Arms | Add-On Model No. | Wt. (Lbs.) |
|---------------------------|--------------|-------------------------|-------------------|-------------|-----------------|--------------------------|-------------------|------------|-------------|------------------|------------|
| Single Column Unit | | | | | | | | | | | |
| 7 | 12" inclined | 1000 | 26½ | 12 | 6' | 12,000 | CR-1 | 314 | 6 | CR-1A | 182 |
| 7 | 12" straight | 1000 | 26½ | 12 | 6' | 12,000 | CR-2 | 314 | 6 | CR-2A | 182 |
| 7 | 16" inclined | 1000 | 26½ | 12 | 6' | 12,000 | CR-5 | 332 | 6 | CR-5A | 191 |
| 7 | 16" straight | 1000 | 26½ | 12 | 6' | 12,000 | CR-6 | 332 | 6 | CR-6A | 191 |
| 10 | 20" straight | 850 | 34½ | 20 | 6' | 17,000 | CR-9 | 455 | 10 | CR-9A | 257 |
| 10 | 24" straight | 700 | 34½ | 20 | 6' | 14,000 | CR-10 | 485 | 10 | CR-10A | 277 |
| Double Column Unit | | | | | | | | | | | |
| 7 | 12" inclined | 1000 | 45 | 24 | 6' | 24,000 | CR-3 | 406 | 12 | CR-3A | 228 |
| 7 | 12" straight | 1000 | 45 | 24 | 6' | 24,000 | CR-4 | 406 | 12 | CR-4A | 228 |
| 7 | 16" inclined | 1000 | 45 | 24 | 6' | 24,000 | CR-7 | 442 | 12 | CR-7A | 246 |
| 7 | 16" straight | 1000 | 45 | 24 | 6' | 24,000 | CR-8 | 442 | 12 | CR-8A | 246 |
| 10 | 20" straight | 850 | 61 | 40 | 6' | 34,000 | CR-11 | 687 | 20 | CR-11A | 371 |
| 10 | 24" straight | 700 | 61 | 40 | 6' | 28,000 | CR-12 | 747 | 20 | CR-12A | 401 |

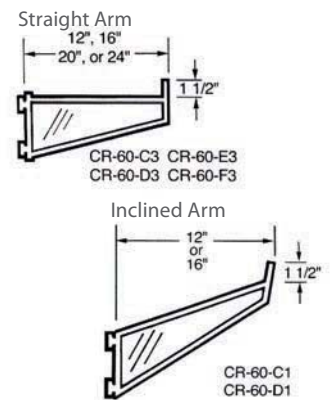



Columns

| Height (Ft.) | Arm Length | Base Length (In.) | Capacity Per Side (Lbs.) | Maximum Arms | Model No. | Wt. (Lbs.) |
|-----------------------------|------------|-------------------|--------------------------|--------------|-----------|------------|
| Columns Single Sided | | | | | | |
| 7 | 12", 16" | 26½ | 6,000 | 6 | CR-61-A | 105 |
| 7 | 20", 24" | 34½ | 4,200 | 6 | CR-61-AL | 111 |
| 10 | 12", 16" | 26½ | 9,000 | 9 | CR-101-A | 120 |
| 10 | 20", 24" | 34½ | 7,650 | 9 | CR-101-AL | 127 |
| Columns Double Sided | | | | | | |
| 7 | 12", 16" | 45 | 6,000 | 6 | CR-61-B | 124 |
| 7 | 20", 24" | 61 | 4,200 | 6 | CR-61-BL | 136 |
| 10 | 12", 16" | 45 | 9,000 | 9 | CR-101-B | 140 |
| 10 | 20", 24" | 61 | 7,650 | 9 | CR-101-BL | 156 |

Do not exceed column capacities. Column capacity rating does not include base. Double column is twice capacity shown.

Arms

| Arms Length (In.) | Capacity Per Arm (Lbs.) | Model No. | Wt. (Lbs.) |
|----------------------|-------------------------|-----------|------------|
| Straight Arms | | | |
| 12 | 1,000 | CR-60-C3 | 4½ |
| 16 | 1,000 | CR-60-D3 | 6 |
| 20 | 850 | CR-60-E3 | 8 |
| 24 | 700 | CR-60-F3 | 9½ |
| Inclined Arms | | | |
| 12 | 1,000 | CR-60-C1 | 4½ |
| 16 | 1,000 | CR-60-D1 | 6 |



Pans for Arms

| Pan Length* (Ft.) | Arm Description | Arm Length | Model No. (Add Prefix CR-60 To Model No.) |
|-------------------|-------------------|-----------------------|---|
| 5' | Straight No Lip | 12" / 16" / 20" / 24" | I12C2 / I16D2 / I20E2 / I24F2 |
| 5' | Straight With Lip | 12" / 16" / 20" / 24" | I12C3 / I16D3 / I20E3 / I24F3 |
| 5' | Inclined No Lip | 12" / 16" | I12C4 / I16D4 |
| 5' | Inclined With Lip | 12" / 16" | I12C1 / I16D1 |
| 8' | Straight No Lip | 12" / 16" / 20" / 24" | J12C2 / J16D2 / J20E2 / J24F2 |
| 8' | Straight With Lip | 12" / 16" / 20" / 24" | J12C3 / J16D3 / J20E3 / J24F3 |
| 8' | Inclined No Lip | 12" / 16" | J12C4 / J16D4 |
| 8' | Inclined With Lip | 12" / 16" | J12C1 / J16D1 |

Note: 7' column maximum arms per column side is 6 arms.
 10' column maximum arms per column side is 9 arms.

Brace Sets

| Model No. | Wt. (Lbs.) | Width | Height |
|-----------|------------|-------|--------|
| CR-61-EF | 18 | 3' | 7' |
| CR-61-GH | 50 | 6' | 7' |
| CR-61-JK | 63 | 8' | 7' |
| CR-101-GH | 55 | 6' | 10' |
| CR-101-JK | 67 | 8' | 10' |


Complete Units 7' and 10' Heights

| Order No. | Ht. (ft.) | Arm Length (in.) | Capacity Per Arm (lbs.) | Total Capacity* (lbs.) | No. of Arms | Brace Width (ft.) | Wt. (lbs.) |
|---------------------------|-----------|------------------|-------------------------|------------------------|-------------|-------------------|------------|
| Single Column Unit | | | | | | | |
| CR-1 | 7 | 12" inclined | 1,000 | 12,000 | 12 | 6 | 314 |
| CR-2 | 7 | 12" straight | 1,000 | 12,000 | 12 | 6 | 314 |
| Double Column Unit | | | | | | | |
| CR-3 | 7 | 12" inclined** | 1,000 | 12,000 | 24 | 6 | 406 |
| CR-4 | 7 | 12" straight | 1,000 | 12,000 | 24 | 6 | 405 |
| Single Column Unit | | | | | | | |
| CR-5 | 7 | 16" inclined | 1,000 | 12,000 | 12 | 6 | 332 |
| CR-6 | 7 | 16" straight | 1,000 | 12,000 | 12 | 6 | 332 |
| Double Column Unit | | | | | | | |
| CR-7 | 7 | 16" inclined | 1,000 | 24,000 | 24 | 6 | 442 |
| CR-8 | 7 | 16" straight | 1,000 | 24,000 | 24 | 6 | 442 |
| Single Column Unit | | | | | | | |
| CR-9 | 10 | 20" straight | 850 | 17,000 | 20 | 6 | 406 |
| CR-10 | 10 | 24" straight | 700 | 14,000 | 20 | 6 | 405 |
| Double Column Unit | | | | | | | |
| CR-11 | 10 | 20" straight | 850 | 34,000 | 40 | 6 | 332 |
| CR-12 | 10 | 24" straight | 700 | 28,000 | 40 | 6 | 332 |


* Plus base load.

** Arms adjust on 4' centers.

Single-Sided

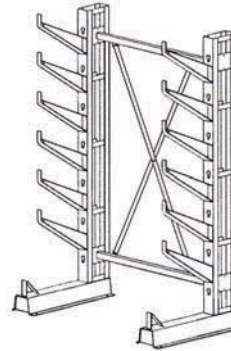

Double-Sided

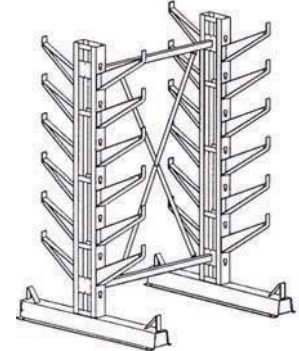


Ideal for placing against a wall.

Add-On Units 7' and 10' Heights


| Order No. | Ht. (ft.) | Arm Length (in.) | Total Capacity* (lbs.) | No. of Arms | Brace Width (ft.) | Wt. (lbs.) |
|----------------------------------|-----------|------------------|------------------------|-------------|-------------------|------------|
| Add-On Single Column Unit | | | | | | |
| CR-1A | 7 | 12" inclined | 6,000 | 6 | 6 | 182 |
| CR-2A | 7 | 12" straight | 6,000 | 6 | 6 | 182 |
| Add-On Double Column Unit | | | | | | |
| CR-3A | 7 | 12" inclined | 12,000 | 12 | 6 | 228 |
| CR-4A | 7 | 12" straight | 12,000 | 12 | 6 | 228 |
| Add-On Single Column Unit | | | | | | |
| CR-5A | 7 | 16" inclined | 6,000 | 6 | 6 | 191 |
| CR-6A | 7 | 16" straight | 6,000 | 6 | 6 | 191 |
| Add-On Double Column Unit | | | | | | |
| CR-7A | 7 | 16" inclined | 12,000 | 12 | 6 | 246 |
| CR-8A | 7 | 16" straight | 12,000 | 12 | 6 | 246 |
| Add-On Single Column Unit | | | | | | |
| CR-9A | 10 | 20" straight | 8,500 | 10 | 6 | 257 |
| CR-10A | 10 | 24" straight | 7,000 | 10 | 6 | 277 |
| Add-On Double Column Unit | | | | | | |
| CR-11A | 10 | 20" straight | 17,000 | 20 | 6 | 332 |
| CR-12A | 10 | 24" straight | 14,000 | 20 | 6 | 401 |

* Plus base load.

Single-Sided

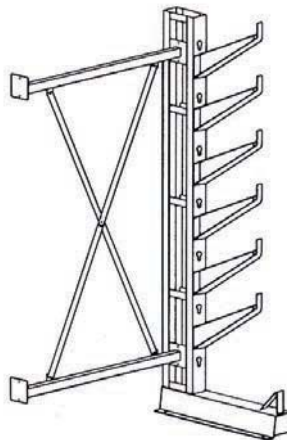

Double-Sided

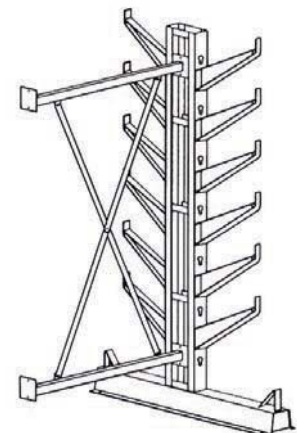



Steeltree® 08 Series

The Medium Duty Steeltree® 08 Series is equal in function to our Heavy Duty Steeltree® 25–60 Series. The 08 Series is made with a lighter gauge steel and smaller dimensions of component parts. Ideal for storing light bar stock, tubing, lumber, or other light-weight materials that are hand picked or easily damaged and must be kept off of the floor. Two or more uprights assemble as a single rack or a continuous unit consisting of any number of uprights to handle longer materials.

- 300 lbs. to 1,300 lbs. capacity per arm
- Sold as units or as component parts
- Single and double sided racks in four column heights
- Straight arms in lengths of 12", 18", 24", 30", 36", 48". Inclined arms 12" to 36"
- Arms adjust on 3" centers
- Ships unassembled (KD)



Steeltree® 08 Cantilever Rack
Starter and Add-On units shown

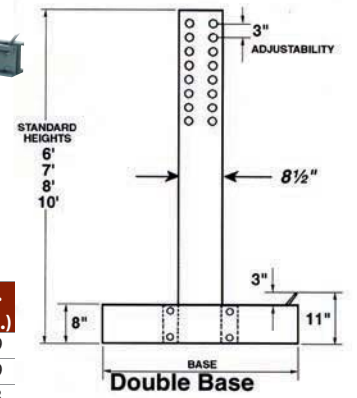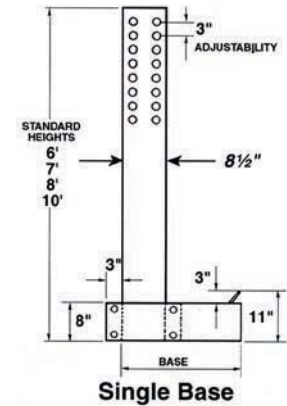

Column Components

| Column Height (Ft.) | Arm Length (In.) | Capacity Per Side (Lbs.) | Single Column Model No. | Base Length (In.) | Wt. (Lbs.) | Double Column Model No. | Base Length (In.) | Wt. (Lbs.) |
|---------------------|------------------|--------------------------|-------------------------|-------------------|------------|-------------------------|-------------------|------------|
| 6 | 12 & 18 | 12,000 & 10,500 | 08CS31072 | 31 | 99 | 08CD53072 | 53 | 119 |
| 6 | 24 | 7,500 | 08CS37072 | 37 | 104 | 08CD65072 | 65 | 129 |
| 6 | 30 & 36 | 6,500 & 5,700 | 08CS46072 | 46 | 115 | 08CD82072 | 82 | 143 |
| 6 | 42 & 48 | 5,000 & 4,300 | 08CS58072 | 58 | 123 | 08CD10472 | 104 | 157 |
| 7 | 12 & 18 | 12,000 & 10,500 | 08CS31084 | 31 | 108 | 08CD53084 | 53 | 128 |
| 7 | 24 | 7,500 | 08CS37084 | 37 | 113 | 08CD65084 | 65 | 138 |
| 7 | 30 & 36 | 6,500 & 5,700 | 08CS46084 | 46 | 124 | 08CD82084 | 82 | 152 |
| 7 | 42 & 48 | 5,000 & 4,300 | 08CS58084 | 58 | 135 | 08CD10484 | 104 | 166 |
| 8 | 12 & 18 | 12,000 & 10,500 | 08CS31096 | 31 | 118 | 08CD53096 | 53 | 138 |
| 8 | 24 | 7,500 | 08CS37096 | 37 | 123 | 08CD65096 | 65 | 148 |
| 8 | 30 & 36 | 6,500 & 5,700 | 08CS46096 | 46 | 134 | 08CD82096 | 82 | 162 |
| 8 | 42 & 48 | 5,000 & 4,300 | 08CS58096 | 58 | 145 | 08CD10496 | 104 | 189 |
| 10 | 12 & 18 | 12,000 & 10,500 | 08CS31120 | 31 | 136 | 08CD53120 | 53 | 156 |
| 10 | 24 | 7,500 | 08CS37120 | 37 | 141 | 08CD65120 | 65 | 166 |
| 10 | 30 & 36 | 6,500 & 5,700 | 08CS46120 | 46 | 152 | 08CD82120 | 82 | 180 |
| 10 | 42 & 48 | 5,000 & 4,300 | 08CS58120 | 58 | 163 | 08CD104120 | 104 | 194 |

Brace Sets (set of 2)

| Brace Length (Ft.) | Model No. | Wt. (Lbs.) |
|--------------------|-----------|------------|
| 3 | 08B2036 | 20 |
| 4 | 08B2048 | 25 |
| 5 | 08B2060 | 30 |
| 6 | 08B2072 | 34 |
| 8 | 08B2096 | 44 |

Arm Components

| Arm Length (In.) | Capacity (Lbs.) | Model No. With Lip | Wt. (Lbs.) | Model No. Without Lip | Wt. (Lbs.) | Model No. With Lip | Wt. (Lbs.) | Model No. Without Lip | Wt. (Lbs.) |
|---------------------|-----------------|--------------------|------------|-----------------------|---------------------|--------------------|------------|-----------------------|------------|
| Straight Arm | | | | | Inclined Arm | | | | |
| 12 | 1,300 | 08ASL12 | 8 | 08ASO12 | 8 | 08AIL12 | 9 | 08AIO12 | 9 |
| 18 | 870 | 08ASL18 | 9 | 08ASO18 | 9 | 08AIL18 | 10 | 08AIO18 | 10 |
| 24 | 650 | 08ASL24 | 11 | 08ASO24 | 11 | 08AIL24 | 12 | 08AIO24 | 12 |
| 30 | 520 | 08ASL30 | 12 | 08ASO30 | 12 | 08AIL30 | 13 | 08AIO30 | 13 |
| 36 | 430 | 08ASL36 | 14 | 08ASO36 | 14 | 08AIL36 | 15 | 08AIO36 | 15 |
| 42 | 400 | 08ASL42 | 15 | 08ASO42 | 15 | NA | NA | NA | NA |
| 48 | 300 | 08ASL48 | 16 | 08ASO48 | 16 | NA | NA | NA | NA |

Do not exceed column capacities. Smallest space between levels is 7". Maximum capacity for double column is twice value shown.

| Column Height | 6' | 7' | 8' | 10' |
|------------------------------|----|----|----|-----|
| Max. Number of Arms per side | 7 | 8 | 9 | 12 |

Deck Support Receptacles

| Description | Model No. | Wt. (Lbs.) |
|-------------|-----------|------------|
| End Arm | 08ASO-SR | 3 |
| Center Arm | 08ASO-DR | 3.5 |
| Base | 08CB-R | 2.5 |

These receptacles are used to cradle 2 x 4's under plywood decking. They are available in both single and double sided designs and will accommodate all 08 series arms and bases, except 48"

Steeltree® Series 08 Complete Unit Breakdown

| Stock No. | Quantity | Model No. | Description | Unit Weight |
|-----------|----------|-----------|---------------------------|-------------|
| MS-7J | 2 Ea. | 08CS31084 | 7' Single Column/Base | 313 lbs. |
| | 1 St. | 08B248 | 4' Brace Set | |
| | 8 Ea. | 08ASL18 | 18" Straight Arm With Lip | |
| MD-7J | 2 Ea. | 08CD53084 | 7' Double Column/Base | 425 lbs. |
| | 1 St. | 08B248 | 4' Brace Set | |
| | 16 Ea. | 08ASL18 | 18" Straight Arm With Lip | |
| MS-8J | 2 Ea. | 08CS37096 | 8' Single Column/Base | 359 lbs. |
| | 1 St. | 08B248 | 4' Brace Set | |
| | 8 Ea. | 08ASL24 | 24" Straight Arm With Lip | |
| MD-8J | 2 Ea. | 08CD65096 | 8' Double Column/Base | 497 lbs. |
| | 1 St. | 08B248 | 4' Brace Set | |
| | 16 Ea. | 08ASL24 | 24" Straight Arm With Lip | |
| MS-10J | 2 Ea. | 08CS46120 | 10' Single Column/Base | 506 lbs. |
| | 1 St. | 08B272 | 6' Brace Set | |
| | 12 Ea. | 08ASL36 | 36" Straight Arm With Lip | |
| MD-10J | 2 Ea. | 08CD82120 | 10' Double Column/Base | 730 lbs. |
| | 1 St. | 08B272 | 6' Brace Set | |
| | 24 Ea. | 08ASL36 | 36" Straight Arm With Lip | |



Add-On Unit Breakdown


| Stock No. | Quantity | Model No. | Description | Unit Weight |
|-----------|----------|-----------|---------------------------|-------------|
| MS-7AJ | 1 Ea. | 08CS31084 | 7' Single Column/Base | 169 lbs |
| | 1 St. | 08B248 | 4' Brace Set | |
| | 4 Ea. | 08ASL18 | 18" Straight Arm With Lip | |
| MD-7AJ | 1 Ea. | 08CD53084 | 7' Double Column/Base | 225 lbs |
| | 1 St. | 08B248 | 4' Brace Set | |
| | 8 Ea. | 08ASL18 | 18" Straight Arm With Lip | |
| MS-8AJ | 1 Ea. | 08CS37096 | 8' Single Column/Base | 192 lbs |
| | 1 St. | 08B248 | 4' Brace Set | |
| | 4 Ea. | 08ASL24 | 24" Straight Arm With Lip | |
| MD-8AJ | 1 Ea. | 08CD65096 | 8' Double Column/Base | 261lbs |
| | 1 St. | 08B248 | 4' Brace Set | |
| | 8 Ea. | 08ASL24 | 24" Straight Arm With Lip | |
| MS-10AJ | 1 Ea. | 08CS46120 | 10' Single Column/Base | 270 lbs |
| | 1 St. | 08B272 | 6' Brace Set | |
| | 6 Ea. | 08ASL36 | 36" Straight Arm With Lip | |
| MD-10AJ | 1 Ea. | 08CD82120 | 10' Double Column/Base | 382 lbs |
| | 1 St. | 08B272 | 6' Brace Set | |
| | 12 Ea. | 08ASL36 | 36" Straight Arm With Lip | |

Steeltree® 25 Series

US Patent No. 3,512,654

The Steeltree® Heavy Duty is for storing large amounts of heavy materials in a compact area. Steeltree® is an excellent option for handling awkward or extremely heavy stock with a forklift. Ideal for bar and tube stocks and sheet material. Units assemble as a single rack or a continuous assembly of any number of racks to handle longer materials.

- 800 lbs. to 3,000 lbs. capacity per arm
- Jarke tapered column design compensates for deflection. ($\frac{1}{8}$ " per foot)
- Double tube bracing
- Sold as units or as component parts
- Single and double sided racks in four column heights
- Straight or inclined arms in lengths from 12" to 60"
- Arms adjust on 3" centers and have removable lips on the ends available
- Assembly is quick & easy no special tools needed

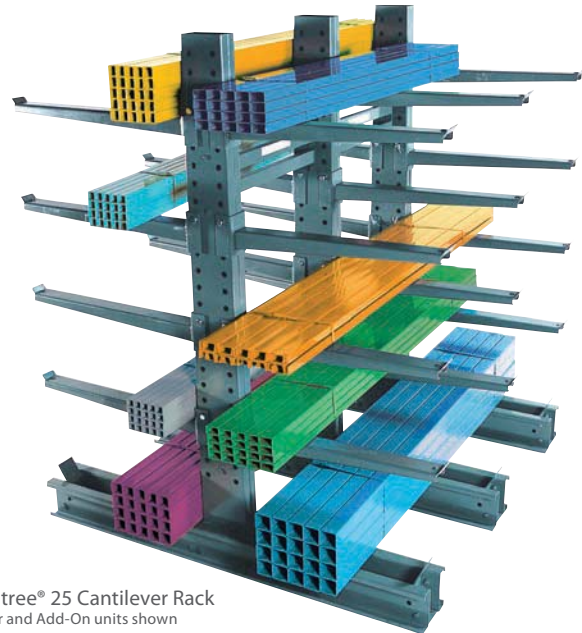

Steeltree® 25 Cantilever Rack
Starter and Add-On units shown



Arm construction provides efficient load support




Pin and lock construction allows arm to be easily adjusted


Column Components

| Column Height (Ft.) | Arm Length (In.) | Capacity Per Side (Lbs.) | Single Column Model No. | Base Length (In.) | Wt. (Lbs.) | Double Column Model No. | Base Length (In.) | Wt. (Lbs.) |
|---------------------|------------------|--------------------------|-------------------------|-------------------|------------|-------------------------|-------------------|------------|
| 8 | 12 & 18 | 18,520 & 14,950 | 25CS31096 | 34 | 183 | 25CD53096 | 53 | 210 |
| 8 | 24 | 12,530 | 25CS37096 | 40 | 191 | 25CD65096 | 65 | 236 |
| 8 | 30 & 36 | 10,780 & 9,460 | 25CS46096 | 49 | 211 | 25CD82096 | 82 | 252 |
| 8 | 42 & 48 | 8,430 & 7,600 | 25CS58096 | 61 | 221 | 25CD106096 | 106 | 292 |
| 10 | 12 & 18 | 25,650 & 20,640 | 25CS31120 | 34 | 201 | 25CD53120 | 53 | 228 |
| 10 | 24 | 16,860 | 25CS37120 | 40 | 209 | 25CD65120 | 65 | 254 |
| 10 | 30 & 36 | 14,250 & 12,340 | 25CS46120 | 49 | 229 | 25CD82120 | 82 | 270 |
| 10 | 42 & 48 | 10,880 & 9,730 | 25CS58120 | 61 | 239 | 25CD106120 | 106 | 310 |
| 10 | 54 & 60 | 8,800 & 8,030 | 25CS70120 | 73 | 270 | 25CD130120 | 130 | 330 |
| 12 | 12 & 18 | 26,300 & 20,450 | 25CS31144 | 34 | 233 | 25CD53144 | 53 | 260 |
| 12 | 24 | 16,730 | 25CS37144 | 40 | 241 | 25CD65144 | 65 | 286 |
| 12 | 30 & 36 | 14,160 & 12,270 | 25CS46144 | 49 | 261 | 25CD82144 | 82 | 302 |
| 12 | 42 & 48 | 10,830 & 9,690 | 25CS58144 | 61 | 271 | 25CD106144 | 106 | 342 |
| 12 | 54 & 60 | 8,760 & 8,000 | 25CS70144 | 73 | 302 | 25CD130144 | 130 | 362 |
| 15 | 24 | 16,540 | 25CS37180 | 40 | 371 | 25CD65180 | 65 | 414 |
| 15 | 30 & 36 | 14,020 & 12,170 | 25CS46180 | 49 | 385 | 25CD82180 | 82 | 438 |
| 15 | 42 & 48 | 10,750 & 9,620 | 25CS58180 | 61 | 402 | 25CD106180 | 106 | 473 |
| 15 | 54 & 60 | 8,710 & 7,560 | 25CS70180 | 73 | 419 | 25CD130180 | 130 | 508 |

Do not exceed column capacities. Column capacity rating does not include base. Double column is twice capacity shown.

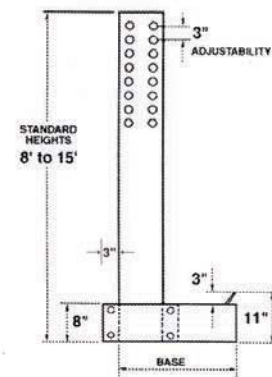

Single Column

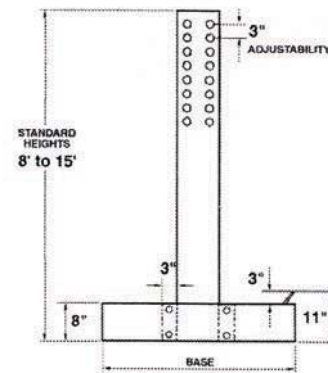

Double Column

Steeltree® 25 Series (cont.)

Steeltree Arm Components—Standard*

| Straight Arm | | | | | Inclined Arm | | | | |
|------------------|-------------------------|--------------------|------------|-----------------------|--------------|--------------------|------------|-----------------------|------------|
| Arm Length (In.) | Capacity Per Arm (Lbs.) | Model No. With Lip | Wt. (Lbs.) | Model No. Without Lip | Wt. (Lbs.) | Model No. With Lip | Wt. (Lbs.) | Model No. Without Lip | Wt. (Lbs.) |
| 12 | 3,300 | 25ASL12 | 11 | 25ASO12 | 11 | 25AIL12 | 12 | 25AIO12 | 12 |
| 18 | 2,500 | 25ASL18 | 13 | 25ASO18 | 13 | 25AIL18 | 14 | 25AIO18 | 14 |
| 24 | 2,000 | 25ASL24 | 15 | 25ASO24 | 15 | 25AIL24 | 16 | 25AIO24 | 16 |
| 30 | 1,600 | 25ASL30 | 17 | 25ASO30 | 17 | — | — | — | — |
| 36 | 1,300 | 25ASL36 | 20 | 25ASO36 | 20 | — | — | — | — |
| 42 | 1,145 | 25ASL42 | 22 | 25ASO42 | 22 | — | — | — | — |
| 48 | 1,000 | 25ASL48 | 24 | 25ASO48 | 24 | — | — | — | — |
| 54 | 890 | 25ASL54 | 26 | 25ASO54 | 26 | — | — | — | — |
| 60 | 800 | 25ASL60 | 29 | 25ASO60 | 29 | — | — | — | — |

*Do not exceed column capacities.

Steeltree Arm Components—Heavy Duty*

| Straight Arm (8' Column use up to 48" arms max.) | | | | | |
|--|-------------------------|--------------------|------------|-----------------------|------------|
| Arm Length (In.) | Capacity Per Arm (Lbs.) | Model No. With Lip | Wt. (Lbs.) | Model No. Without Lip | Wt. (Lbs.) |
| 36 | 2,175 | 40ASL36 | 28 | 40ASO36 | 28 |
| 42 | 1,865 | 40ASL42 | 31 | 40ASO42 | 31 |
| 48 | 1,630 | 40ASL48 | 34 | 40ASO48 | 34 |
| 54 | 1,480 | 40ASL54 | 37 | 40ASO54 | 37 |
| 60 | 1,330 | 40ASL60 | 40 | 40ASO60 | 40 |

*Do not exceed column capacities. Capacity is for evenly distributed loads.

Steeltree Arm Components—Extra Heavy Duty*

| Straight Arm (10', 12', 15' Columns only) | | | | | |
|---|-------------------------|--------------------|------------|-----------------------|------------|
| Arm Length (In.) | Capacity Per Arm (Lbs.) | Model No. With Lip | Wt. (Lbs.) | Model No. Without Lip | Wt. (Lbs.) |
| 36 | 3,000 | 60ASL36 | 43 | 60ASO36 | 43 |
| 42 | 2,850 | 60ASL42 | 49 | 60ASO42 | 49 |
| 48 | 2,500 | 60ASL48 | 52 | 60ASO48 | 52 |
| 54 | 2,250 | 60ASL54 | 57 | 60ASO54 | 57 |
| 60 | 2,000 | 60ASL60 | 62 | 60ASO60 | 62 |

*Do not exceed column capacities. Capacity is for evenly distributed loads.

Steeltree Series 25 & 60 Brace Sets




| Brace Sets for 8' Columns | | | Brace Sets for 10' & 12' Columns | | |
|---------------------------|-----------|------------|----------------------------------|-----------|------------|
| Brace Length (Ft.) | Model No. | Wt. (Lbs.) | Brace Length (Ft.) | Model No. | Wt. (Lbs.) |
| 3 | 25B2036 | 34 | 3 | 25B3036 | 51 |
| 4 | 25B2048 | 43 | 4 | 25B3048 | 65 |
| 5 | 25B2060 | 52 | 5 | 25B3060 | 79 |
| 6 | 25B2072 | 62 | 6 | 25B3072 | 93 |
| 8 | 25B2096 | 82 | 8 | 25B3096 | 123 |

(set of 2)


(set of 3)

Arms

Straight & Inclined Arm Detail



Extra Heavy-Duty Arm Detail* (uses 2 pins)



Steeltree Brace Sets

| Brace Sets for 15' Columns | | |
|----------------------------|--------------------|------------|
| Model No. | Brace Length (Ft.) | Wt. (Lbs.) |
| 25B4036 | 3 | 91 |
| 25B4048 | 4 | 114 |
| 25B4060 | 5 | 137 |
| 25B4072 | 6 | 158 |
| 25B4096 | 8 | 205 |

(set of 4 with x-bracing)

Deck Support Receptacles

| Model No. | Description | Wt. (Lbs.) |
|-----------|-------------|------------|
| 25ASO-SR | End Arm | 3 |
| 25ASO-DR | Center Arm | 3.5 |
| 25CB-R | Base | 2.5 |

These receptacles are used to cradle 2 x 4's under plywood decking. They are available in both single and double sided designs and will accommodate all 25 series arms and bases.

Steeltree® 60 Series

US Patent No. 3,512,654

- 2,000 lbs. to 3,300 lbs. capacity per arm
- The 60 Series columns utilize all the 25, 40 and 60 Series arm and brace components
- The advantage of the 60 Series Steeltree® is greater column capacity.
- 60 Series is also a tapered column designed to compensate for deflection.

Column Component

| Column Ht. (Ft.) | Arm Length (In.) | Capacity Per Side (Lbs.) | Single Base Column | Base Length (In.) | Wt. (Lbs.) | Double Base Column Model | Base Length (In.) | Wt. (Lbs.) |
|------------------|------------------|--------------------------|--------------------|-------------------|------------|--------------------------|-------------------|------------|
| 8 | 12 & 18 | 36,780 & 31,340 | 60CS37096 | 37 | 321 | 60CD58096 | 58 | 351 |
| 8 | 24 | 27,310 | 60CS43096 | 43 | 331 | 60CD70096 | 70 | 371 |
| 8 | 30 & 36 | 24,190 & 21,710 | 60CS52096 | 52 | 346 | 60CD88096 | 88 | 402 |
| 8 | 42 & 48 | 19,700 & 18,025 | 60CS64096 | 64 | 367 | 60CD112096 | 112 | 444 |
| 8 | 54 & 60 | 16,610 & 15,400 | 60CS76096 | 76 | 388 | 60CD136096 | 136 | 485 |
| 10 | 12 & 18 | 37,050 & 31,540 | 60CS37120 | 37 | 372 | 60CD58120 | 58 | 402 |
| 10 | 24 | 27,450 | 60CS43120 | 43 | 382 | 60CD70120 | 70 | 423 |
| 10 | 30 & 36 | 24,310 & 21,810 | 60CS52120 | 52 | 398 | 60CD88120 | 88 | 454 |
| 10 | 42 & 48 | 19,775 & 18,090 | 60CS64120 | 64 | 418 | 60CD112120 | 112 | 495 |
| 10 | 54 & 60 | 16,660 & 15,450 | 60CS76120 | 76 | 439 | 60CD136120 | 136 | 536 |
| 12 | 12 & 18 | 37,320 & 31,730 | 60CS37144 | 37 | 418 | 60CD58144 | 58 | 448 |
| 12 | 24 | 27,600 | 60CS43144 | 43 | 428 | 60CD70144 | 70 | 469 |
| 12 | 30 & 36 | 24,425 & 21,900 | 60CS52144 | 52 | 444 | 60CD88144 | 88 | 500 |
| 12 | 42 & 48 | 19,850 & 18,150 | 60CS64144 | 64 | 464 | 60CD112144 | 112 | 541 |
| 12 | 54 & 60 | 16,720 & 15,500 | 60CS76144 | 76 | 485 | 60CD136144 | 136 | 582 |
| 15 | 12 & 18 | 37,730 & 32,030 | 60CS37180 | 37 | 489 | 60CD58180 | 58 | 519 |
| 15 | 24 | 27,830 | 60CS43180 | 43 | 499 | 60CD70180 | 70 | 540 |
| 15 | 30 & 36 | 24,600 & 22,040 | 60CS52180 | 52 | 515 | 60CD88180 | 88 | 571 |
| 15 | 42 & 48 | 19,970 & 18,250 | 60CS64180 | 64 | 535 | 60CD112180 | 112 | 612 |
| 15 | 54 & 60 | 16,800 & 15,570 | 60CS76180 | 76 | 556 | 60CD136180 | 136 | 653 |

Do not exceed column capacities. Column capacity rating does not include base. Double column is twice capacity shown.

Steeltree® 25 Series

Complete Unit Breakdown


| Stock No. | Quantity | Model No. | Description | Unit Weight |
|-----------|----------|------------|---------------------------|-------------|
| SC-8J† | 2 Ea. | 25CS37096 | 8' Single Column/Base | 564 lbs. |
| | 1 St. | 25B272 | 6' Brace Set | |
| | 8 Ea. | 25ASL24 | 24" Straight Arm With Lip | |
| DC-8J† | 2 Ea. | 25CD65096 | 8' Single Column/Base | 774 lbs. |
| | 1 St. | 25B272 | 6' Brace Set | |
| | 16 Ea. | 25ASL24 | 24" Straight Arm With Lip | |
| SC-10J† | 2 Ea. | 25CS46120 | 10' Single Column/Base | 791 lbs. |
| | 1 St. | 25B372 | 6' Brace Set | |
| | 12 Ea. | 25ASL36 | 36" Straight Arm With Lip | |
| DC-10J† | 2 Ea. | 25CD82120 | 10' Double Column/Base | 1113 lbs. |
| | 1 St. | 25B372 | 6' Brace Set | |
| | 24 Ea. | 25ASL36 | 36" Straight Arm With Lip | |
| SC-12J† | 2 Ea. | 25CS58144 | 12' Single Column/Base | 1019 lbs. |
| | 1 St. | 25B372 | 6' Brace Set | |
| | 16 Ea. | 25ASL48 | 48" Straight Arm With Lip | |
| DC-12J† | 2 Ea. | 25CD106144 | 12' Double Column/Base | 1545 lbs. |
| | 1 St. | 25B372 | 6' Brace Set | |
| | 32 Ea. | 25ASL48 | 48" Straight Arm With Lip | |




Add-On Unit Breakdown

| Stock No. | Quantity | Model No. | Description | Unit Weight |
|-----------|----------|------------|---------------------------|-------------|
| SC-8AJ† | 1 Ea. | 25CS37096 | 8' Single Column/Base | 313 lbs |
| | 1 St. | 25B272 | 6' Brace Set | |
| | 4 Ea. | 25ASL24 | 24" Straight Arm With Lip | |
| DC-8AJ† | 1 Ea. | 25CD65096 | 8' Double Column/Base | 418 lbs |
| | 1 St. | 25B272 | 6' Brace Set | |
| | 8 Ea. | 25ASL24 | 24" Straight Arm With Lip | |
| SC-10AJ† | 1 Ea. | 25CS46120 | 10' Single Column/Base | 442 lbs |
| | 1 St. | 25B372 | 6' Brace Set | |
| | 6 Ea. | 25ASL36 | 36" Straight Arm With Lip | |
| DC-10AJ† | 1 Ea. | 25CD82120 | 10' Double Column/Base | 603 lbs |
| | 1 St. | 25B372 | 6' Brace Set | |
| | 12 Ea. | 25ASL36 | 36" Straight Arm With Lip | |
| SC-12AJ† | 1 Ea. | 25CS58144 | 12' Single Column/Base | 556 lbs |
| | 1 St. | 25B372 | 6' Brace Set | |
| | 8 Ea. | 25ASL48 | 48" Straight Arm With Lip | |
| DC-12AJ† | 1 Ea. | 25CD106144 | 12' Double Column/Base | 819 lbs |
| | 1 St. | 25B372 | 6' Brace Set | |
| | 16 Ea. | 25ASL48 | 48" Straight Arm With Lip | |

Steeltree® Series

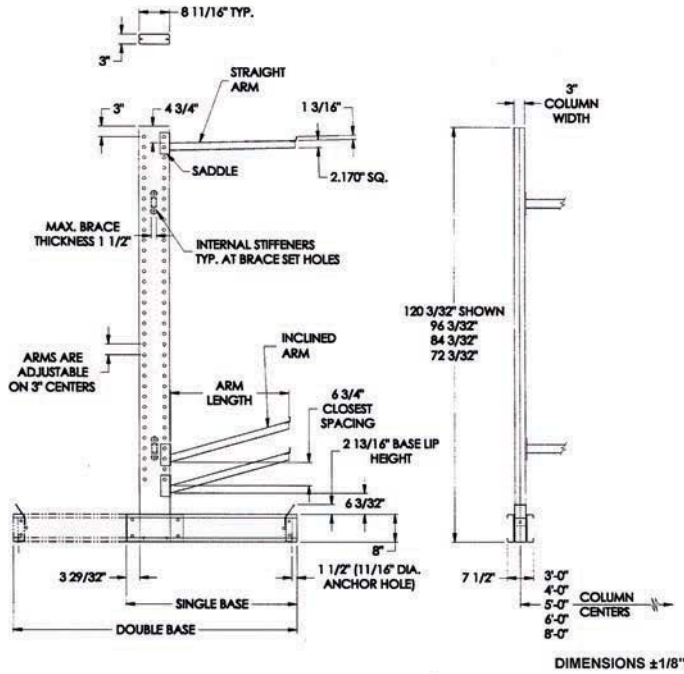

Steeltree® Series 08
Column Details

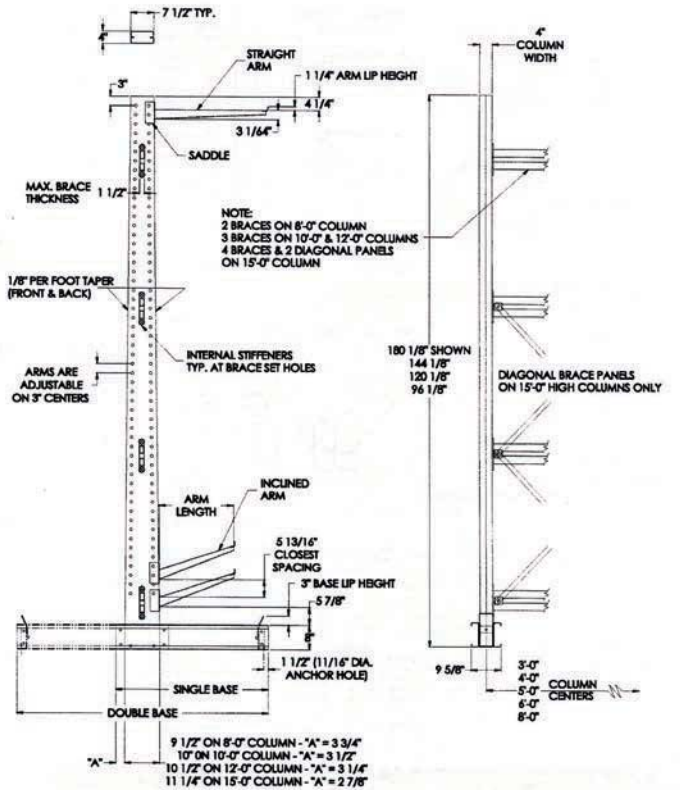

Steeltree® Series 25
Column Details


Cantilever Racks Selection Guide

Define the Load

1. Length: _____
2. Depth: _____
3. Height: _____
4. Weight: _____
5. Horizontal Arm Spacing: _____

Load Deflection-Determine the Number of Uprights

Load deflection is characterized as the sagging of the load between the arms. Space blocks on the floor at an equal distance apart under the load until you have no sagging. Each block represents one arm. The arm will be connected to the upright to support the load.

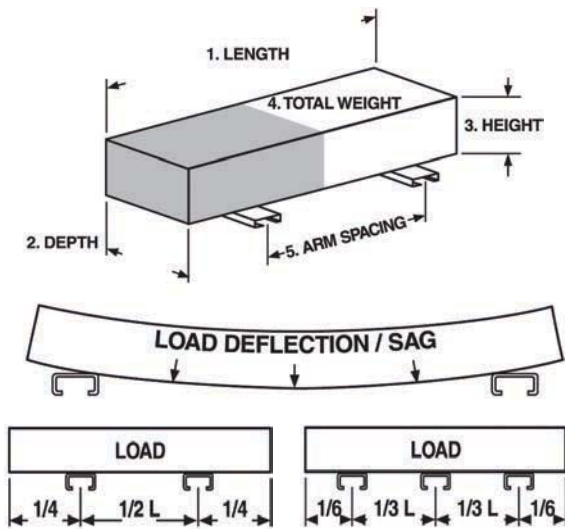


For safe loads with two-arm support distance between arms should be $\frac{1}{2}$ the load and length.

Three arm support should be $\frac{1}{3}$ the load and length.


Arm Selection

1. Divide the total weight by the number of arms, as required.
2. Match the load capacity required with the appropriate arm length and select proper arm from table. Arm length should equal load depth.



Arm Loading

All capacities are based on uniformly distributed load.

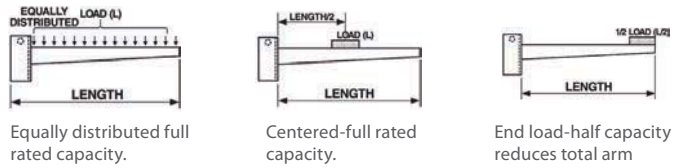

Equally distributed full rated capacity.

Centered-full rated capacity.


End load-half capacity reduces total arm capacity by 50%

Column Capability

Do not exceed column capacities. Count the number of arms to be used on column; find arm capacity on spec sheet and multiply by number of arms per column.

Typical Cantilever Loading Pattern

Load weights must be evenly distributed over number of arms used to support it. The overhang should equal $\frac{1}{2}$ the column spacing. This will assure even loading on all arms.

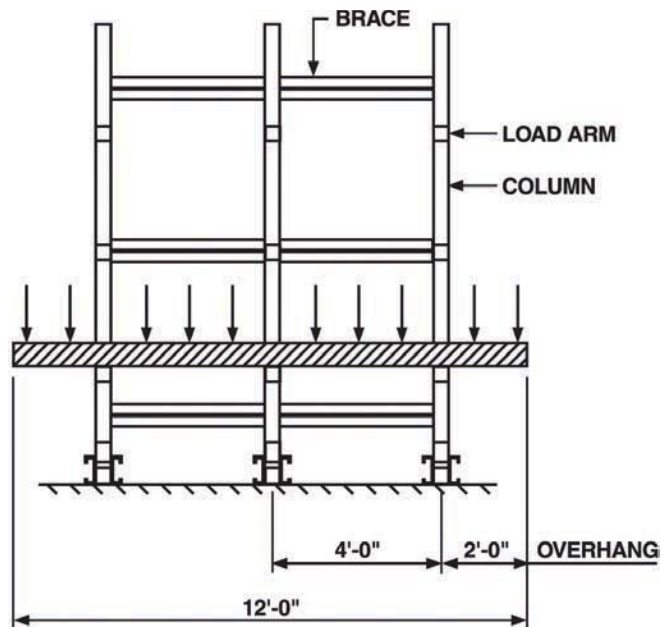

Vertical Storage Racks

All-welded steel components bolt together for quick and easy assembly creating a rack that stores long material vertically. Arms extend 6" beyond shelves creating divided storage. Four separate shelf levels allow for storage of smaller lengths and drops in same bay. Use in tool rooms, maintenance areas, machine centers, storage areas and point of purchase displays.

- 3,000 lb. capacity per unit
- Use as an island of storage or as a continuous row
- Stores long material up to 12' long
- Shelves are 12 gauge steel
- Individually packaged and ships unassembled (KD)
- Painted gray

| Model No. | H x W x D (In.) | Capacity (Lbs.) | Wt. (Lbs.) |
|-----------|-----------------|-----------------|------------|
| CR-834 | 84 x 36 x 24 | 3,000 | 110 |



Vertical Storage Rack

Horizontal Storage Racks

Horizontal storage is a terrific option for storing angles, bars, pipes, etc. up to 10' long. Additional units could be positioned to accommodate items longer than 10' with two or more units.

- 1,800 lb. capacity per unit
- Use as islands of storage or as continuous rows.
- 9 arm levels extend 9" on 6" spacing
- Rack is 84" high with a 30" x 30" base that tapers upward
- Individually packaged and ships unassembled (KD)
- Painted gray

| Model No. | Ht. (In.) | Base Dim. (In.) | Wt. (Lbs.) |
|-----------|-----------|-----------------|------------|
| CR-833 | 84 | 30 x 30 | 105 |



Horizontal Storage Rack

Bar Storage Rack


This rack will easily organize bar ends, saw drops and pipe. This system allows for fast identification and retrieval of materials as needed.

- Starter unit 500 lbs capacity per opening, 66 openings
16,000 lbs. total capacity
- Add-on unit adds additional 5,300 lbs. to capacity
- Heavy Duty uprights, 1/4" thick steel grid
- Bolts together for easy assembly
- Optional painted shelf

| Model No. | Description | Paint | L x W x H (In.) | Opening (In.) | Wt. (Lbs.) |
|-----------|--------------|-------|--|---|------------|
| BSRS | Starter Unit | Gray | 36 ¹ / ₂ x 41 ¹ / ₂ x 74 ³ / ₄ | 5 ¹ / ₂ x 5 ¹ / ₂ | 264 |
| BSRA | Add-On Unit | Gray | 17 x 41 ¹ / ₂ x 74 ³ / ₄ | 5 ¹ / ₂ x 5 ¹ / ₂ | 92 |
| BSR-SHELF | Shelf (each) | Gray | 36 x 5 ¹ / ₂ | — | 5 |



Bar Storage Rack—Starter unit

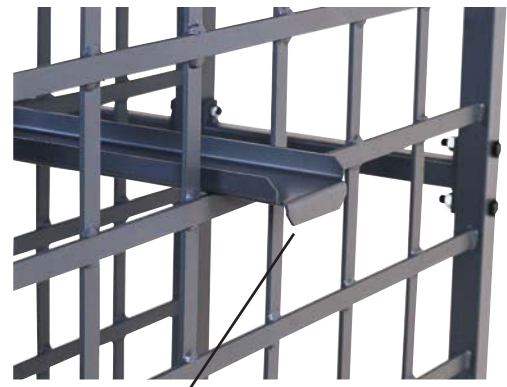

Opening is 5¹/₂" W x 5¹/₂" H

Mini-Module®

US Patent No. 2,801,752



The Mini-Module is an efficient, low-cost means to quickly organize floor clutter anywhere in your plant or warehouse. Sturdy, lightweight and easy to handle, completely flexible storage system for all sorts of materials. Jarke mini-module installations are expandable in width, height and length.

- 2,500 lbs. to 7,500 lbs. capacity per single compartment unit
- Heavy Duty all welded steel construction
- Materials are accessible as individual pieces
- No bolts, no tools, no fittings required in set-up or take-down
- Stack up mini-modules to the length, height and width you require
- Shelves and shelf dividers available to further segment compartment
- Quick storage and retrieval of long material
- 8'-10' long materials utilize 2 units, 12'-16' long materials utilize 3 units and 16' to 24' length materials use 4 units.

Painted gray



Mini-Module®
6 units shown

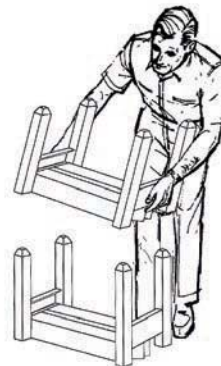

Shelf: Divides full capacity into 2 sections.

Mini-Module Single Compartment Unit

| Model No. | Inside Dim. H x W x D (In.) | Outside Dim. H x W x D (In.) | Capacity (Lbs.) | Wt. (Lbs.) |
|--------------------|--------------------------------|---------------------------------|--------------------|---------------|
| SZ AX [†] | 12 x 12 x 8 | 13½ x 16 x 12 | 2,500 | 18 |
| SZ BX [†] | 15 x 15 x 10 | 17 x 19 x 14 | 3,700 | 26 |
| SZ CX [†] | 18 x 18 x 11 | 20½ x 22 x 15 | 5,600 | 31 |
| SZ DX [†] | 20 x 22 x 12 | 23½ x 26 x 16 | 7,500 | 49 |

Shelf (2-way divider)

| Model No. | Wt. (Lbs.) |
|-----------|------------|
| SA | 10 |
| SB | 12 |
| SC | 16 |
| SD | 23 |

Call about our
QUICK SHIP
program

Mini-Module Multiple-Section Units

| Model No. | Inside Dim. H x W x D (In.) | Number of Openings | Capacity (Lbs.) | Wt. (Lbs.) |
|-----------|--------------------------------|-----------------------|--------------------|---------------|
| A-2 | 13½ x 30 x 12 | 2 | 5,000 | 31 |
| A-3 | 13½ x 44 x 12 | 3 | 7,500 | 45 |
| A-4 | 13½ x 58 x 12 | 4 | 10,000 | 59 |
| A-5 | 13½ x 72 x 12 | 5 | 12,500 | 73 |

Multiple unit sections eliminate posts which reduces overall width. The solid base provides additional rigidity.

Shelf (2-way divider)

| Model No. | Description | Wt. (Lbs.) |
|-----------|---------------------|------------|
| MSA | 2 Way Shelf Divider | 9 |

Stacking U-Rack

U-Racks are a low-cost storage alternative for long-unwieldy materials. U-Racks can be stacked up to four high, offering quick, stable, low-density storage for long materials such as bars, pipe, tubing, angles, channels, and plastic shapes. Use for long term or as temporary storage next to a work station. Excellent product separators.

- 6,000 lbs. or 10,000 lbs. capacity per pair
- Stacks up to 4 levels high, with nesting flanges trapping unit above
- All welded construction, no tools needed for assembly
- Lightweight construction, one person set-up
- Ideally suited for changing storage requirements
- Finished in high visibility orange powdercoat



Stacking U-Rack
4 units shown

| Model No. | Inside Dimension Base W x Top W x H (In.) | Capacity | Wt. (Lbs./ea.) |
|-----------|---|----------|----------------|
| ULD-06 | 16 1/2 x 25 1/4 x 15 3/4 | 6,000 | 25 |
| ULD-10 | 16 1/2 x 25 1/4 x 15 3/4 | 10,000 | 30 |

Tubular Wire Rack

This rack is ideal for use when 4-way entry is not required. This all-tubular series provides storage planning at a savings in cost. Rugged steel construction with high nesting plugs. Hook slots and ribbing are available as optional features.


- 4,000 lbs. capacity
- Square tubular steel posts
- 2-way front fork entry only
- 3 High stackability



Tubular Wire Rack

| Rack Model No. | For Coil Diameter (In.) | Size W x H (In.) | Wt. (Lbs./ea.) |
|----------------|-------------------------|------------------|----------------|
| TW-2428 | 24 - 28 | 20 x 33 | 103 |
| TW-2933 | 29 - 33 | 22 x 37 1/2 | 111 |
| TW-3438* | 34 - 38 | 24 x 42 1/2 | 118 |
| TW-3943* | 39 - 43 | 26 x 47 1/2 | 128 |
| TW-4448* | 44 - 48 | 28 x 53 | 136 |


* Non-skid ribbing available for a minimal add-on charge.
Minimum quantity order: 10 units.

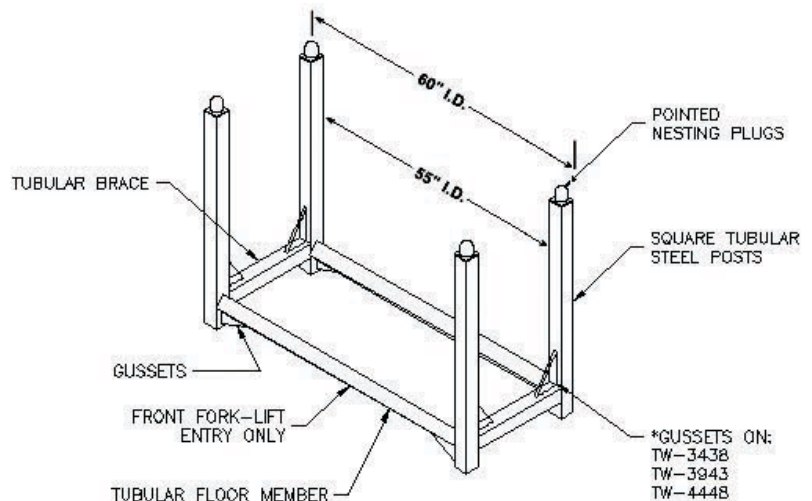

Airector® Stacking Racks

Jarke Airector® racks combine the unit load capabilities of a pallet with the product protection of stacking posts. The welded tubular steel construction provides Airectors with dependable load carrying strength. Painted Gray

- 2,000 lbs. to 4,000 lbs. capacity
- Designed for 4-way forklift handling
- Wood or open bases (contact factory for information on steel bases)
- Comes standard with 9" high corner sockets

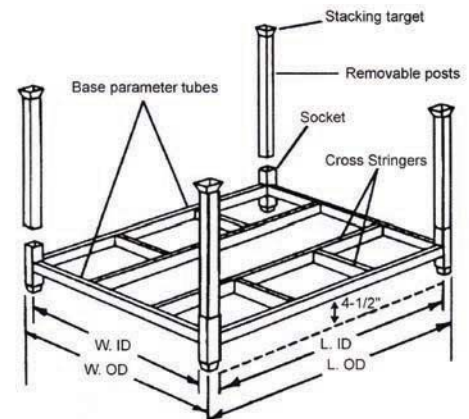

Airector Heavy Duty Bases (base only)

| Model No. | O.A. Width | O.A. Length | Wt. | Model No. | O.A. Width | O.A. Length | Wt. |
|-------------------------|------------|-------------|--------|-------------------------|------------|-------------|--------|
| 2,000 Lbs. Cap. | (In.) | (In.) | (Lbs.) | 4,000 Lbs. Cap. | (In.) | (In.) | (Lbs.) |
| Open Deck | | | | Open Deck | | | |
| BB2-4248H | 42 | 48 | 60 | BB4-4248H | 42 | 48 | 89 |
| BB2-4254H | 42 | 54 | 68 | BB4-4254H | 42 | 54 | 99 |
| BB2-4260H | 42 | 60 | 77 | BB4-4260H | 42 | 60 | 109 |
| BB2-4848H [†] | 48 | 48 | 65 | BB4-4848H | 48 | 48 | 104 |
| BB2-4854H | 48 | 54 | 74 | BB4-4854H | 48 | 54 | 111 |
| BB2-4860H | 48 | 60 | 82 | BB4-4860H [†] | 48 | 60 | 127 |
| Wood Deck | | | | Wood Deck | | | |
| BB2-4248HW | 42 | 48 | 80 | BB4-4248HW | 42 | 48 | 96 |
| BB2-4254HW | 42 | 54 | 87 | BB4-4254HW | 42 | 54 | 104 |
| BB2-4260HW [†] | 42 | 60 | 101 | BB4-4260HW | 42 | 60 | 114 |
| BB2-4848HW | 48 | 48 | 89 | BB4-4848HW [†] | 48 | 48 | 111 |
| BB2-4854HW | 48 | 54 | 97 | BB4-4854HW | 48 | 54 | 119 |
| BB2-4860HW | 48 | 60 | 112 | BB4-4860HW | 48 | 60 | 135 |

Call about our QUICK SHIP program


Heavy Duty Post Sets (sets of 4)

| Ht. (In.) | Model No. | Wt. Per | Model No. | Wt. Per |
|------------|-----------------|------------|----------------------|------------|
| Above Deck | 2,000 Lbs. Cap. | Set (Lbs.) | 4,000 Lbs. Cap. | Set (Lbs.) |
| 36 | PT-2-36 | 30 | PT-4-36 [†] | 38 |
| 42 | PT-2-42 | 33 | PT-4-42 | 42 |
| 48 | PT-2-48 | 36 | PT-4-48 [†] | 47 |
| 60 | PT-2-60 | 42 | PT-4-60 | 55 |

Call about our QUICK SHIP program
 Height shown from top of deck to underside of target.
 Heavy duty channel collar—(sets of 4). Available upon request.
 End or Side Frames Interchangeable, removable.
 4000 lb. capacity end/side frames* (set of 2).
 Sized to your application. Consult factory.



Airector® Stacking Racks
3 bases shown with posts

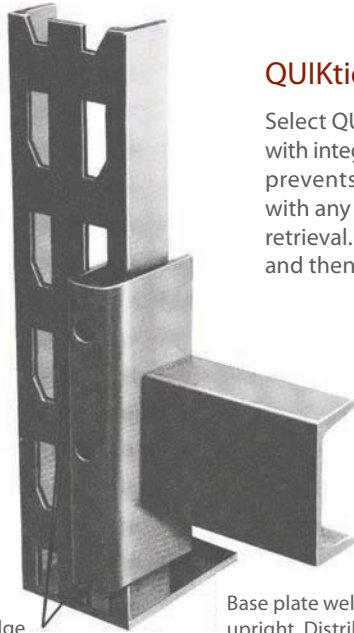

Three point wedge connection provides great strength and rigidity.

Base plate welded to upright. Distributes load over a wider area.

QUIKtier®

Select QUIKtier for maximized storage space & minimized cost. Boltless beam connectors with integral lock allow for inexpensive, rapid assembly & low maintenance. Integral lock prevents accidental dislodging of beams due to upward force. Any beam is interchangeable with any upright. Beams adjust on 2½" centers. Compatible with automated storage and retrieval. To determine the sizes and capacities needed, find the depth in the first column and then follow across chart to the upright height as required.

Protect your pallets, merchandise and storage systems from forklift damage!

You'll find Steel Sentry™ post protectors on page 30 of this catalog.

Structural Frame QUIKtier™ Selection Chart

| Depth (In.) | Upright Frame Ht. | | | | | | | | | | Upright* Capacity (Lbs.) |
|-------------|-------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------------------|
| | 6' | 8' | 10' | 12' | 14' | 16' | 18' | 20' | 22' | 24' | |
| 30 | QU-30072 63 | QU-30096 81 | QU-30120 102 | QU-30144 122 | QU-30168 141 | QU-30192 162 | QU-30216 181 | QU-30240 198 | QU-30264 221 | QU-30288 241 | 31,000 |
| 36 | QU-36072 66 | QU-36096 83 | QU-36120 105 | QU-36144 125 | QU-36168 145 | QU-36192 167 | QU-36216 186 | QU-36240 204 | QU-36264 227 | QU-36288 247 | 31,000 |
| 42 | QU-42072 68 | QU-42096 85 | QU-42120 108 | QU-42144 128 | QU-42168 148 | QU-42192 171 | QU-42216 191 | QU-42240 210 | QU-42264 233 | QU-42288 254 | 31,000 |
| 48 | QU-48072 70 | QU-48096 87 | QU-48120 111 | QU-48144 131 | QU-48168 151 | QU-48192 175 | QU-48216 196 | QU-48240 216 | QU-48264 239 | QU-48288 260 | 31,000 |

*31,000 based on level of first shelf not to exceed 48" above floor. First shelf level that exceeds 48" will reduce upright capacity. Call factory for rating information or capacities other than shown.


Structural Channel Beams

| Beam Ht. (In.) | Beam Length (Clearspan) | | | | | | | | | | |
|----------------|--|--|--|--|--|--|--|--|--|--|--|
| | 54" | 60" | 72" | 84" | 92" | 96" | 108" | 120" | 132" | 144" | |
| | Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.) | Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.) | Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.) | Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.) | Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.) | Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.) | Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.) | Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.) | Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.) | Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.) | Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.) |
| 3 | 30CLO54 9,600 45 | 30CLO60 8,800 49 | 30CLO72 7,330 58 | 30CLO84 5,920 67 | 30CLO92 4,930 72 | 30CLO96 4,530 76 | 30CL108 3,580 85 | 30CL120 2,900 94 | 30CL132 2,400 103 | 30CL144* 2,015 112 | |
| 4 | 40CLO54 — 53 | 40CLO60 9,600 58 | 40CLO72 9,600 69 | 40CLO84 9,600 80 | 40CLO92 9,600 87 | 40CLO96 9,600 90 | 40CL108* 8,310 101 | 40CL120* 6,730 112 | 40CL132* 5,560 123 | 40CL144* 4,670 134 | |
| 5 | — | — | — | — | — | 50CLO96 9,600 112 | 50CL108 9,600 125 | 50CL120* 8,640 138 | 50CL132* 7,855 151 | 50CL144* 7,200 165 | |

*Requires one beam tie per pair of beams. Higher capacities available, consult factory.


Rigid Back-to-Back Ties

| Quicktier | | |
|-----------|--------------|------------|
| Model No. | Length (In.) | Wt. (Lbs.) |
| TR-04 | 4 | 3 |
| TR-06 | 6 | 4 |
| TR-08 | 8 | 4 |
| TR-10 | 10 | 5 |
| TR-12 | 12 | 6 |



Flush Drop-in Skid Supports


| Model No. | Used with Upright Width (In.) | Capacity Each (Lbs.) | Wt. (Lbs.) |
|-----------|-------------------------------|----------------------|------------|
| F-SS30 | 30 | 1,800 | 14 |
| F-SS36 | 36 | 1,500 | 17 |
| F-SS42 | 42 | 1,300 | 20 |
| F-SS48 | 48 | 1,100 | 22 |



Steel Drop-in Decks (for 94" Beams)

Approximately 200 lbs per sq. ft. capacity. Additional capacities and sizes available upon request. Wire mesh decks are also available.

| Model No. | Used with Upright Width (In.) | Wt. (Lbs.) |
|-----------|-------------------------------|------------|
| DD30094 | 30 | 108 |
| DD36094 | 36 | 129 |
| DD42094 | 42 | 156 |
| DD48094 | 48 | 170 |







Wall Ties

| Model No. | Length (In.) | Wt. (Lbs.) |
|-----------|--------------|------------|
| TRW-04 | 4 | 3 |
| TRW-06 | 6 | 4 |
| TRW-08 | 8 | 4 |
| TRW-10 | 10 | 5 |
| TRW-12 | 12 | 6 |


Universal Beam Tie (Fits All Beams)

| Model No. | Used with Upright Width (In.) | Wt. (Lbs.) |
|-----------|-------------------------------|------------|
| TB3048 | 30 to 48 | 10 |

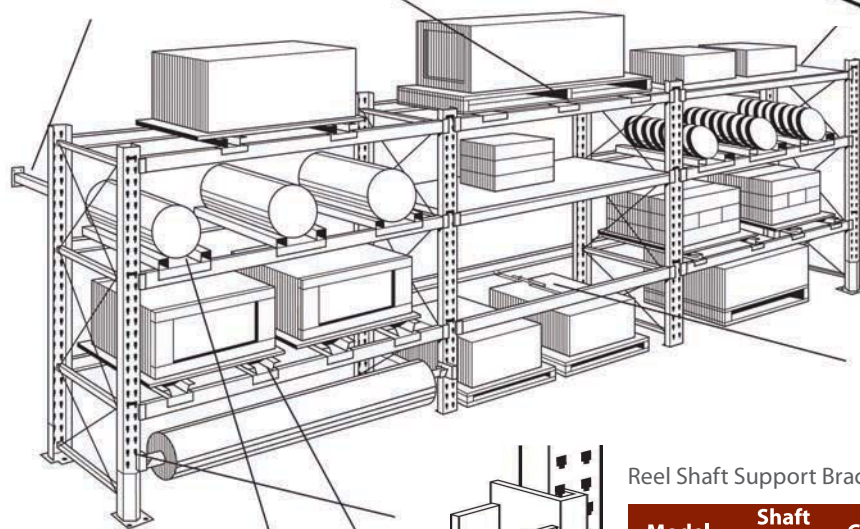

Reel Shaft Support Bracket (Quicktier only)

| Model No. | Shaft Diameter (In.) | Capacity Pr. (Lbs.) | Wt. (Lbs.) |
|-----------|----------------------|---------------------|------------|
| QU-RS-15 | 1 1/2 | 3,000 | 5 |
| QU-RS-25 | 2 1/2 | 4,500 | 6 |



Standard Drop-in Skid Supports


| Model No. | Used with Upright Width (In.) | Capacity Each (Lbs.) | Wt. (Lbs.) |
|-----------|-------------------------------|----------------------|------------|
| SS30 | 30 | 1,800 | 14 |
| SS36 | 36 | 1,500 | 17 |
| SS42 | 42 | 1,300 | 20 |
| SS48 | 48 | 1,100 | 22 |

Drop-in Coil/Drum Cradles Used for wire, strip or any other

| Quikter Model No. | Used with Upright Width (In.) | Capacity Each (Lbs.) | Wt. (Lbs.) |
|-------------------|-------------------------------|----------------------|------------|
| QBC30 | 30 | 1,050 | 11 |
| QBC36 | 36 | 875 | 13 |
| QBC42 | 42 | 750 | 15 |
| QBC48 | 48 | 650 | 16 |

Fork Truck Clearance Strut

| Model No. | Used with Upright Width (In.) | Capacity Each (Lbs.) | Wt. (Lbs.) |
|-----------|-------------------------------|----------------------|------------|
| FS30 | 30 | 3,920 | 12 |
| FS36 | 36 | 3,200 | 14 |
| FS42 | 42 | 3,800 | 17 |
| FS48 | 48 | 2,450 | 18 |



EZ-Glide™


100% Full Extension Roll-Out Shelving

High density storage, E-Z Glide's 100% shelf extension allows quick, efficient loading and unloading of bulky items. Shelves roll out even when loaded to capacity. Easy to install. Shipped knocked down. The E-Z Glide has welded and bolted construction with a solid steel top deck for extra rigidity (top deck does not roll out). Top deck may be used as the pick up point to conveniently relocate empty racks and for use as additional storage. All standard E-Z Glide units have available add-on units that share a common upright. The add-on is for wall-to-wall racking of shelves...or any length in between. The add-on connects to existing shelves creating a continuous assembly of any number. Units should be anchored to the floor. (Anchors not included)


- 2,000 lbs. capacity per shelf
- Full 100% extension of every shelf
- Individual shelf height adjustable based on 2 inch centers
- Modular construction allows bolt-together expansion of multiple units.
- Horizontal access by fork lift truck, cart, hand truck or any method with a height adjusting bed
- Vertical access via crane, manipulator or monorail system
- Welded and bolted construction
- Nine (9) starter & add-on models available



EZ-Glide

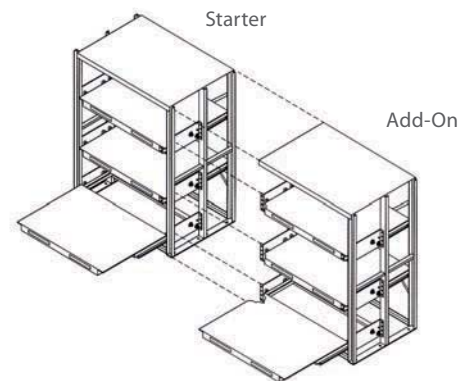

| Starter Model No. | Shelf Size (In.) | No. of Shelves | Overall Ht. (In.) | Wt. (Lbs.) | Add-On Model No. | Wt. (Lbs.) |
|---|------------------|----------------|-------------------|------------|------------------|------------|
| EZ363662 | 36 x 36 | 3 | 62 1/2 | 911 | EZ363662A | 831 |
| EZ483662 | 48 x 36 | 3 | 62 1/2 | 1053 | EZ483662A | 973 |
| EZ484862 | 48 x 48 | 3 | 62 1/2 | 1260 | EZ484862A | 1174 |
| EZ363672 | 36 x 36 | 3 | 72 1/2 | 932 | EZ363672A | 842 |
| EZ483672 | 48 x 36 | 3 | 72 1/2 | 1074 | EZ483672A | 984 |
| EZ484872 | 48 x 48 | 3 | 72 1/2 | 1281 | EZ484872A | 1185 |
| EZ363684 | 36 x 36 | 4 | 84 1/2 | 1166 | EZ363684A | 1063 |
| EZ483684 | 48 x 36 | 4 | 84 1/2 | 1348 | EZ483684A | 1245 |
| EZ484884 | 48 x 48 | 4 | 84 1/2 | 1510 | EZ484884A | 1407 |
| Additional Shelves (2,000 Lbs. Capacity) | | | | | | |
| EZSH3636 | 36 x 36 | — | — | 210 | — | — |
| EZSH4836 | 48 x 36 | — | — | 248 | — | — |
| EZSH4848 | 48 x 48 | — | — | 303 | — | — |

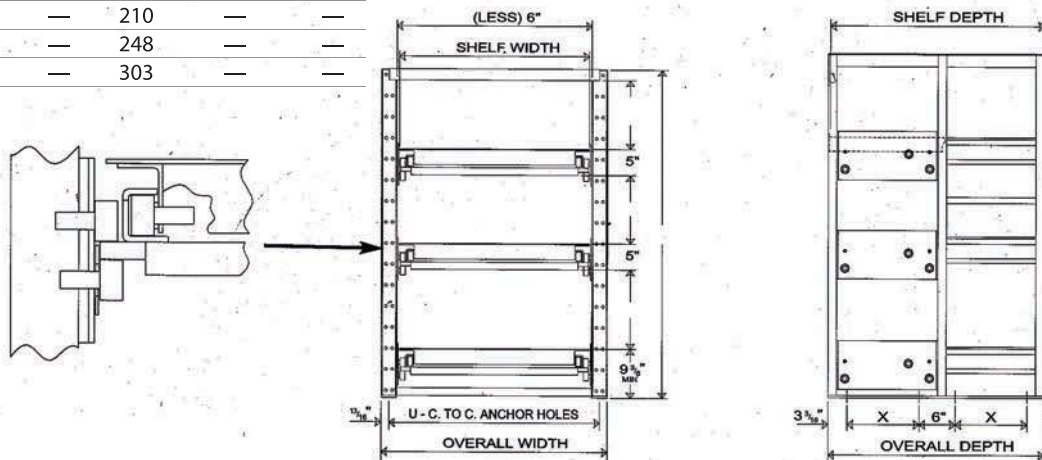


Reel Rack Heavy Duty

- 2,000 lbs. per level with 10,000 lbs. maximum capacity per rack
- Provides quick and uncluttered access
- Comes standard with 4 sets of rack axle brackets which accept axle up to 2" diameter (axle not included)
- Axle brackets adjust on 2" center
- 24" maximum reel dimension

| Overall Dim. W x D x H (In.) | Inside Clear Dimension W x D x H (In.) | Starter Model No. | Wt. (Lbs.) | Add-On Model No. | Wt. (Lbs.) |
|---------------------------------|---|----------------------|---------------|---------------------|---------------|
| 24 x 24 x 96 | 17 ⁵ / ₈ x 24 x 96 | RR242496 | 236 | RA242496 | 149 |
| 36 x 24 x 96 | 29 ⁵ / ₈ x 24 x 96 | RR362496 | 252 | RA362496 | 165 |
| 48 x 24 x 96 | 42 ⁵ / ₈ x 24 x 96 | RR482496 | 268 | RA482496 | 181 |
| 24 x 36 x 96 | 17 ⁵ / ₈ x 36 x 96 | RR243696 | 254 | RA243696 | 158 |
| 36 x 36 x 96 | 29 ⁵ / ₈ x 36 x 96 | RR363696 | 270 | RA363696 | 174 |
| 48 x 36 x 96 | 42 ⁵ / ₈ x 36 x 96 | RR483696 | 286 | RA483696 | 190 |
| 24 x 24 x 120 | 17 ⁵ / ₈ x 24 x 120 | RR2424120 | 269 | RA2424120 | 165 |
| 36 x 24 x 120 | 29 ⁵ / ₈ x 24 x 120 | RR3624120 | 285 | RA3624120 | 181 |
| 48 x 24 x 120 | 42 ⁵ / ₈ x 24 x 120 | RR4824120 | 301 | RA4824120 | 197 |
| 24 x 36 x 120 | 17 ⁵ / ₈ x 36 x 120 | RR2436120 | 289 | RA2436120 | 175 |
| 36 x 36 x 120 | 29 ⁵ / ₈ x 36 x 120 | RR3636120 | 305 | RA3636120 | 191 |
| 48 x 36 x 120 | 42 ⁵ / ₈ x 36 x 120 | RR4836120 | 321 | RA4836120 | 207 |
| Brackets 1-Set | — | RRAXB | 7 | — | — |

Recommend that unit be secure to the floor. (Anchors not included)

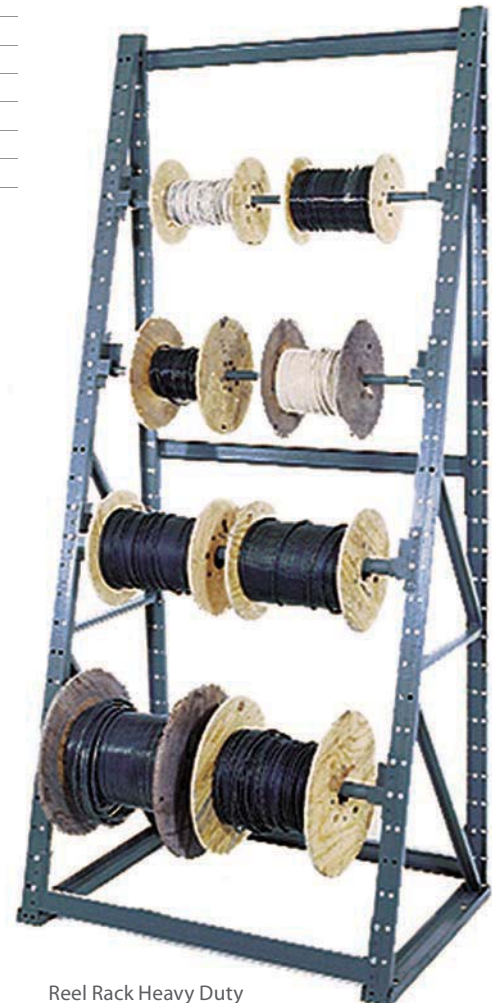


Reel Rack Heavy Duty

Drum Storage Rack

The Jarke drum racks offer compact, high-density storage of 55 gallon drums. This unit allows for closed drums to be easily transported to a worksite which means avoiding the hazards of transporting small quantities of liquid in open containers.

- 1,200 lbs. to 1,800 lbs. capacity
- The Jarke KD drum rack has the same heavy duty design and high capacity as a welded unit.
- Stack up to 4 tiers high with an interlocking design which gives this rack high capacity and more stability
- Portable and light weight
- Breaks down for easy storage
- Painted high visibility orange
- Forklift accessibility
- An all-welded unit is available

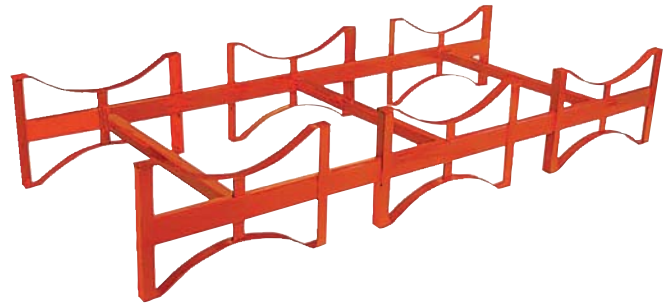

TD-55KD



HD-55KD

| Model No. | Description | H x L x D (In.) | Capacity (Lbs.) | Wt. (Lbs.) |
|-----------|--|-----------------|-----------------|------------|
| HD-55KD | Hi-Drum Rack 2 Drum Carriage | 12 x 46 x 30 | 1,200 | 48 |
| TD-55KD | Tri-Drum Rack 3 Drum Carriage | 12 x 72 x 30 | 1,800 | 66 |
| *HD-550 | Hi-Drum Stand Without Casters | - | 1,500 | 60 |
| *HD-555 | Hi-Drum Stand With 5" Caster Wheels | - | 1,500 | 75 |

*Hi-Drum Stand does not include Hi-Drum




HD-555
(Rack not included)



Gillis-Jarke™ Portable Bar Racks are designed for one-man handling with unit loads, based on crane capacity and operating requirements – regardless of crane device used.


Gillis-Jarke™ Portable Bar Racks are rugged, heavy-duty, all-welded steel construction. They are engineered to withstand normal rough handling and to provide years of maintenance-free service. They are designed to stack easily.

Most importantly, Gillis-Jarke™ Portable Bar Racks are designed to handle heavy unit loads in perfect safety. Special designs to meet your specific requirements are available without obligation.

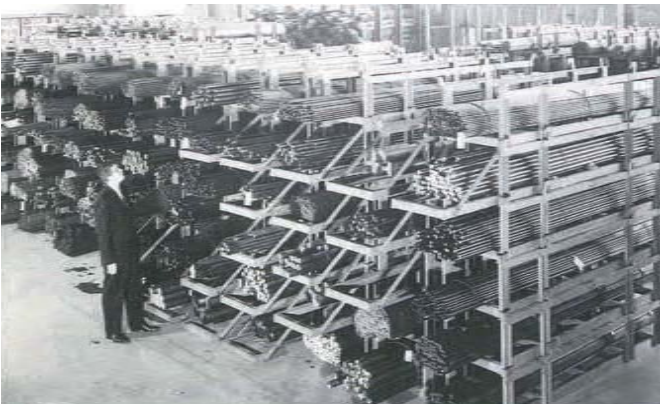


EASY-OUT SERIES

Available in all three rack styles up to 10,000 lbs. capacity. Permits easy sling removal or attachment for materials being removed or loaded into racks.



TRANSPORT CARTS

For unit handling of racks and loads when they have been de-stacked by crane and carried to aisle for further transport. Multiple options available.

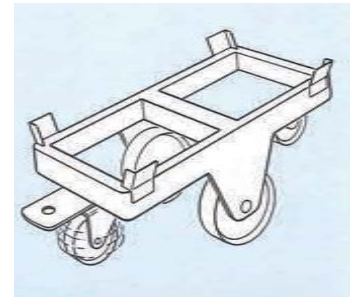


WHY THREE BAR RACK STYLES?

Each type has basic advantages for particular operating circumstances. A quick check of the table below will give you a good idea of the Portable Bar Rack that will best suit your needs.

| FACTORS | LEVELIFT® RACK | AUTOMATIC RACK | FLANGE RACK |
|----------------------|---|--|---|
| HANDLING | Ideal for cab-controlled crane. Guide-fenders allow "sail-in" grab entry. | For cab-operated and monorail crane where maneuverability is limited | Ideal for floor-controlled crane. Operator has full visibility for end entry |
| BALANCE | Adjustable | Non-Adjustable | Adjustable |
| HEADROOM REQUIREMENT | | | Least |
| MULTIPLE LIFTS | Not possible | Not possible | Possible. Especially suitable for light metals, tubing, plastics |
| RACK COST | Approximately the same | | Somewhat more expensive than Levelift® and automatic racks above 10,000 lbs. capacity |
| GRAB COST | Approx. same as Flange | Approx. double the cost of Flange or Levelift® | Approx. same as Levelift® |

CHOICE OF THREE HANDLING METHODS

LEVELIFT® RACK and GRAB

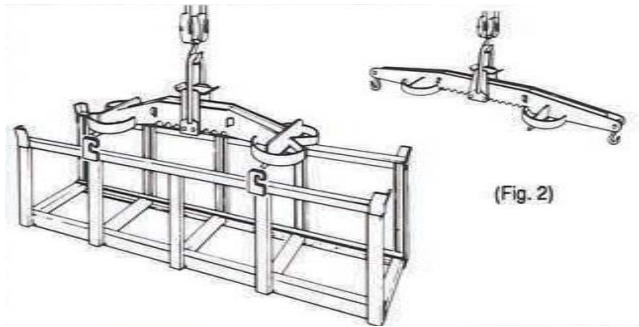


RACK

Hook type standard design for handling with Gillis-Jarke™ Levelift® Grab.

GRAB

Patented design for handling Gillis-Jarke™ Levelift® Racks. Specially designed shackle piece permits crane operator to compensate for off-center loads. Safeguards against tipping and stock sliding. Circular fenders provide easy sighting and positioning by crane operator and permit smooth entry into hooks on rack. Optional spreader beam available on quotation.

AUTOMATIC RACK and GRAB

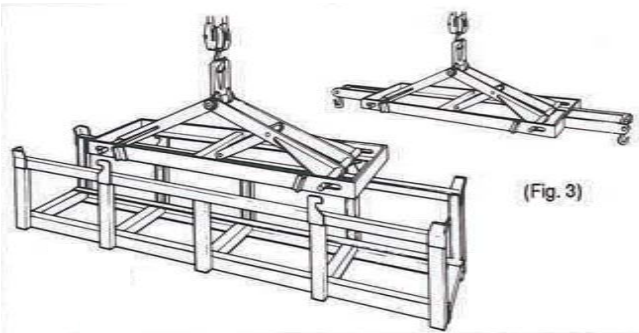


RACK

Hook type standard design with out-facing hooks to accommodate scissors-action grabs.

GRAB

Scissors-action grab is engineered to lock into hoist position when lowered over a Gillis-Jarke™ Automatic Rack. Optional spreader beam available on quotation.

FLANGE RACK and GRAB

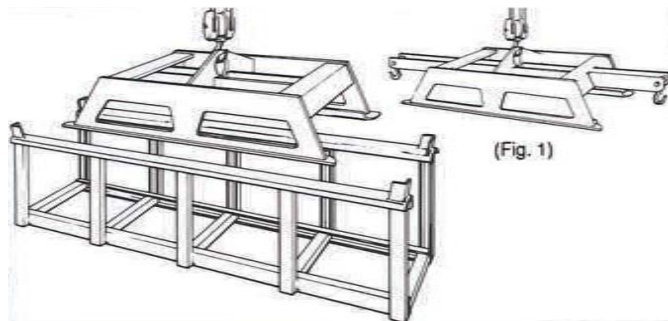

RACK

Flange top racks permit handling with Gillis-Jarke™ Flange Grab.

GRAB

Slides over end of Gillis-Jarke™ Flange Rack to make pickup. Easy for crane operator to lift and reset to compensate for unbalanced loads, preventing tipping or stock sliding. With adequate crane capacity, can be designed to lift two or more racks at one time (usually used for lightweight metals). Optional spreader beam available on quotation.

All bar racks on these pages are standard designs, with engineered capacities and safety factors for safe, economical handling of bar stocks. All racks stack 8 high, and our wide range of capacities and dimensions will meet almost any requirement. Special designs available.

To place an order,
contact your dealer today!

One of the most important parts of our business, is protecting yours. Here's how.

A busy warehouse, plant, or distribution center can pose a real challenge when it comes to safety. That's why SPG makes Jarke protective rail systems that are designed to withstand the hazards of the workplace—to help make certain that your employees, equipment, and inventory can do the same.

Our Steel Sentry® brand has helped set the standard for quality and durability in the industry. The Jarke line of protective rails includes:

- Guardrails
- Corrugated guardrails
- Handrails
- Bollards
- Post protectors
- Corner guards
- Guards for machinery and overhead doors


To help you create the safest possible work environment, the Jarke line includes features designed to increase their versatility while meeting the unique design needs of your facilities.

- Guardrails come in either all-welded construction or as a bolt-together system that offers greater access for servicing machinery and equipment
- Rail systems come in different sizes to handle a wide array of applications
- System components coordinate with each other to let you design a customized protection system

Expect More...

Jarke systems from SPG make it easy for you to create secure, protected spaces within your facilities. From the loading dock to the warehouse...from the factory floor up to the mezzanines and walkways...Jarke protective rail systems can help safeguard your operations and your future.

To place an order, contact your dealer today!

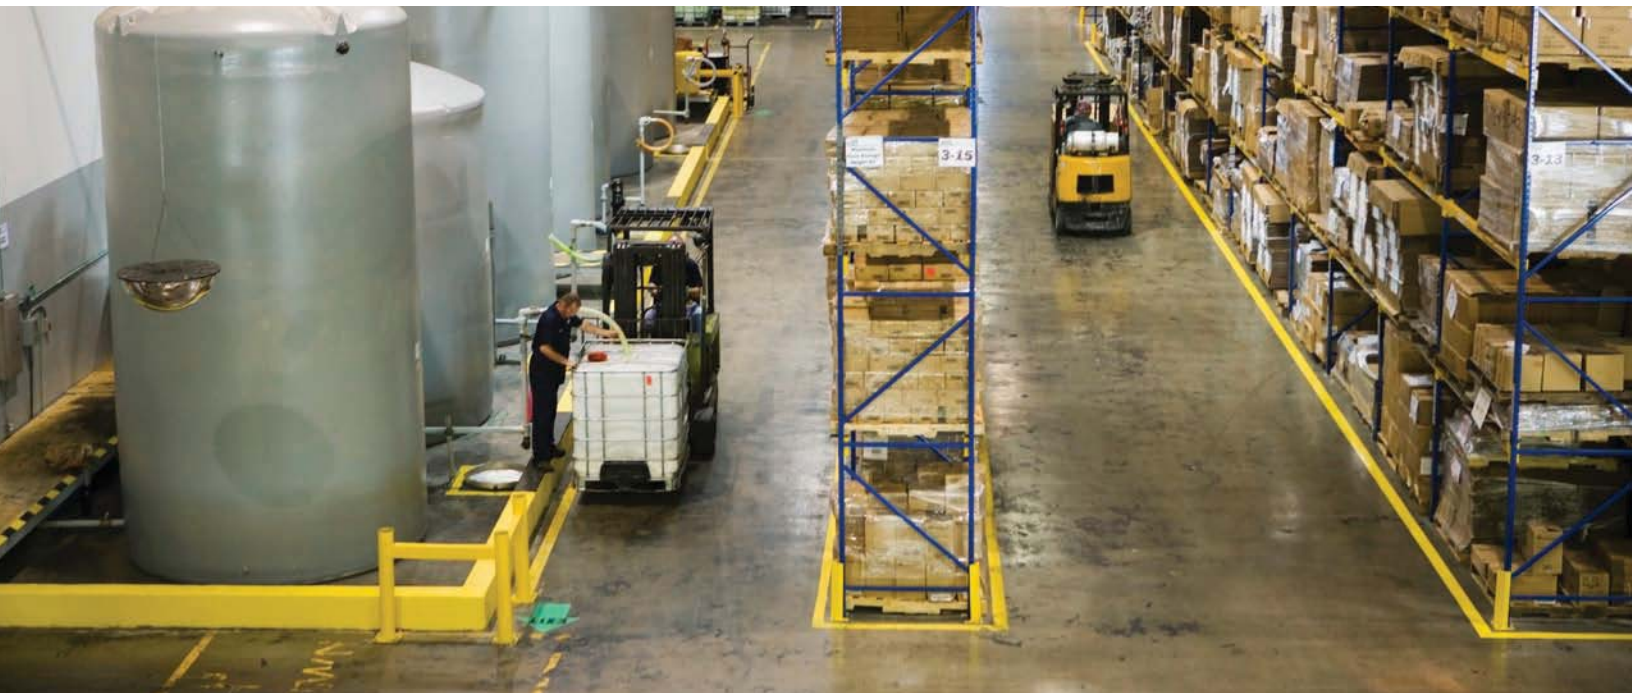

Steel Sentry® Protective Rail Systems

The Jarke line of guardrails, handrails, bollards and guards will help protect valuable equipment and workers from hazards in the workplace. We have two versions of guardrail, either all welded or a bolt together system which allows for lift out access for servicing machinery or equipment.



Guardrail Bolted

- Standard rails are 11ga steel, corrugated rails are 12ga steel
- Create a barrier wall or complete surround
- Single or Double rail system
- Removable rails offer access to machinery for repairs
- High visibility yellow
- Parts can easily be replaced if damaged

Rails bolt in place for added strength

Posts are 4" square 7ga steel

Ships KD (knocked down)



Rails

| Model No. | Description | Wt. (Lbs.) |
|-----------|-------------|------------|
| SG048R | 4' Rail | 21 |
| SG072R | 6' Rail | 32 |
| SG096R | 8' Rail | 43 |
| SG120R | 10' Rail | 54 |


*Rail Dimensions are measured to center line of post, 4" square posts.
 Any Size special rail lengths can be ordered to meet your specifications.
 Bolts are included with rail piece.




| Rails | | |
|--------|----------------------------------|---------|
| Part # | Description | Wt(Lbs) |
| CG48R | Corrugated Steel Sentry Rail 4' | 25 |
| CG72R | Corrugated Steel Sentry Rail 6' | 39 |
| CG96R | Corrugated Steel Sentry Rail 8' | 52 |
| CG120R | Corrugated Steel Sentry Rail 10' | 66 |
| CG132R | Corrugated Steel Sentry Rail 11' | 87 |
| CG144R | Corrugated Steel Sentry Rail 12' | 39 |

| Single Rail Posts | | |
|-------------------|--------------------------------------|---------|
| Part # | Description | Wt(Lbs) |
| 1CG1 | Corrugated Steel Sentry 24" End Post | 43 |
| 1CG2 | Corrugated Steel Sentry 24" Mid Post | 51 |

| Double Rail Posts | | |
|-------------------|--------------------------------------|---------|
| Part # | Description | Wt(Lbs) |
| 2CG1 | Corrugated Steel Sentry 47" End Post | 69 |
| 2CG2 | Corrugated Steel Sentry 47" Mid Post | 85 |

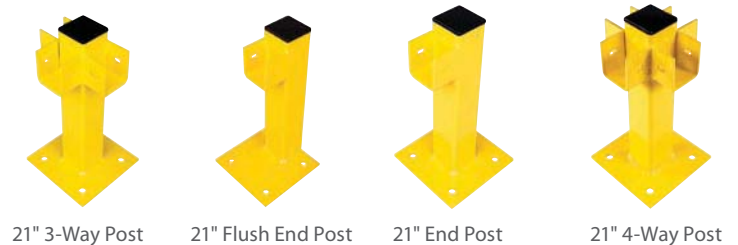

| Single Rail System | | | Double Rail System | | |
|--------------------|-----------------------|------------|--------------------|-----------------------|------------|
| Model No. | Description | Wt. (Lbs.) | Model No. | Description | Wt. (Lbs.) |
| 1SG1 | 21" End Post | 36 | 2SG1 | 45" End Post | 57 |
| 1SG2 | 21" Intermediate Post | 39 | 2SG2 | 45" Intermediate Post | 62 |
| 1SG3 | 21" 3-Way Post | 42 | 2SG3 | 45" 3-Way Post | 69 |
| 1SG4 | 21" 4-Way Post | 45 | 2SG4 | 45" 4-Way Post | 75 |
| 1SGCP | 21" Corner Post | 40 | 2SGCP | 45" Corner Post | 62 |
| 1SG1F | 21" Flush End Post | 36 | 2SG1F | 45" Flush End Post | 57 |

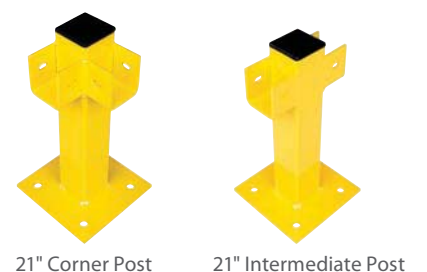

Foot plate 11" x 11" x 1/2" thick with (4) 7/8" diameter lagholes.




Guardrail All Welded

- 4" square tubular 7 gauge steel
- 11" x 11" x ½" thick foot plates 7/8" mounting holes
- Select from three heights: 15"H single rail, 29½"H double rail, or 44"H triple rail
- High visibility yellow

| Rail Length (Ft.) | Single Rail Model No. | Wt. (Lbs.) | Double Rail Model No. | Wt. (Lbs.) | Triple Rail Model No. | Wt. (Lbs.) |
|-------------------|-----------------------|------------|-----------------------|------------|-----------------------|------------|
| 4 | GR-4S-48 | 107 | GR-4D-48 | 180 | GR-4T-48 | 208 |
| 6 | GR-4S-72 | 117 | GR-4D-72 | 201 | GR-4T-72 | 260 |
| 8 | GR-4S-96 | 128 | GR-4D-96 | 222 | GR-4T-96 | 316 |



Single Rail

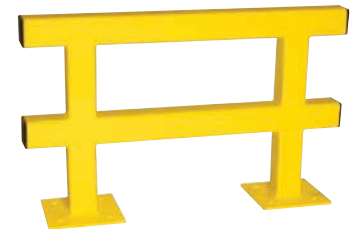

Double Rail



Triple Rail



Corner Guardrail

Steel Sentry® Corner Guardrail All Welded


- 7ga steel
- Ideal for creating a protective space 42" per side, around equipment or machinery. Available in single, double and triple rail heights, to coordinate with all-welded products.

| Model No. | Description | Wt. (Lbs.) |
|-----------|--------------------|------------|
| CX-1 | Corner Rail Single | 145 |
| CX-2 | Corner Rail Double | 236 |
| CX-3 | Corner Rail Triple | 328 |

Post Protector

- 3/16" thick steel
- Protect pallet racking uprights/frames
- Sturdy ½" x 6" x 9½" base
- For both Jarke Quiktier and Utilitier

| Model No. | W x H (In.) | Wt. (Lbs.) |
|-----------|-------------|------------|
| PP-12 | 4 x 12 | 15 |
| PP-18 | 4 x 18 | 19 |
| PP-24 | 4 x 24 | 23 |

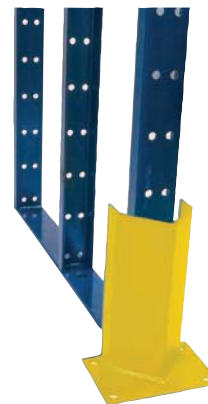

Post Protector

Bollard

- 7ga steel
- 4" sq. post ideal for protection at dock areas
- Three heights: 24", 36", 48"
- Sturdy ½" x 11" x 11" base plate

| Model No. | Size (In.) | Wt. (Lbs.) |
|-----------|------------|------------|
| BO-24 | 24 High | 36 |
| BO-36 | 36 High | 45 |
| BO-48 | 48 High | 49 |



Bollard

Machinery Guard

| Model No. | H x L (In.) | Wt. (Lbs.) |
|-----------|-------------|------------|
| MG-3610 | 10 x 36 | 78 |
| MG-3624 | 24 x 36 | 99 |
| MG-3642 | 42 x 36 | 128 |
| MG-4810 | 10 x 48 | 82 |
| MG-4842 | 42 x 48 | 136 |



Machinery Guard

Corner Guard

| Model No. | Description | Wt. (Lbs.) |
|-----------|-------------|------------|
| CG-24 | 24" High | 39 |
| CG-36 | 36" High | 52 |



Corner Guard



Overhead Door Track Guard

Overhead Door Track Guards

- Covers overhead door track to prevent damage
- Steel guard is 3/16" thick with 3/8" thick base plate
- Sold as pairs
- Mounts to wall and floor

| Model No. | Description | Wt. (Lbs.) |
|-----------|-------------------------------|------------|
| DT-24 | 24" Overhead Door Track Guard | 50/pr. |
| DT-36 | 36" Overhead Door Track Guard | 70/pr. |

The depth of the track containment is 7-3/16"



Steel Sentry® Handrails

- This railing system is most frequently used on mezzanines, walkways or to provide a protective barrier
- 1 1/2" square tube rail all welded steel
- Double tiered 4' sections can be used in a straight line or at 90° angle to make a directional change
- Use with either an end base or an intermediate base
- Easy to install
- High visibility yellow

| Model No. | Description | W x H (In.) | Wt. (Lbs.) |
|-----------|--------------------|-------------|------------|
| HR-4248 | Hand Rail Assembly | 48 x 42 | 23 1/2 |
| HR-1B | End Base | — | 2 |
| HR-2B | Intermediate Base | — | 2 1/2 |

*Anchor bolts not provided.



Handrails



End Base



Intermediate Base

To place an order,
contact your dealer today!

No one gives you more, or better, ways to take your operation to new heights.

The ladder. It is one of those essential pieces of equipment in any material handling operation. The right ladder can increase productivity, simplify complex tasks, and improve the workflow throughout your facilities. The right ladder is durable, reliable, designed to handle the toughest jobs, offers superior service, and is built to last.

That defines Gillis ladders from SPG. In fact, Gillis offers the largest variety of rolling steel and fixed ladders on the market. While each Gillis ladder is unique, they all bring you heavy-duty construction and innovative design features.

Just consider some of the advantages Gillis delivers:

- All Gillis ladders meet or exceed OSHA or ANSI standards
- Gillis offers you exclusive features, like our patented "6-Wheeler" design that lets you navigate even the tightest spaces quickly and easily
- Our SAF-T lock system is step activated and secures the ladder in place for safer use
- With our Packaging Plus Program all knocked-down ladders (5 steps and above) can be shipped crated to help prevent damage during shipping

Above all, Gillis offers you all of this quality, durability, and value in a line of ladders designed to meet virtually every material handling application...

- Our famous SAF-T ladders in a wide array of configurations
- Mobile mechanics ladders with handles for easy mobility
- Truck-N-Maintenance ladders with a 50-degree climbing angle ideal for loading and unloading small packages from trucks
- Truck-N-Dock ladders designed with removable side and back chains for easy loading and unloading from any direction
- 50-degree crossover ladders in a variety of clearance heights and widths
- Office ladders with solid steel rubber-covered steps
- All-welded steel work platforms that feature casters for easy movement, plus the added security of our available SAF-T Lock System


Expect More...

Standard on all of these ladders is legendary Gillis quality, durability, and value. So, if you want to elevate the performance of your business, choose Gillis ladders from SPG.



Our Packaging Program can help prevent shipping damages.

60° Standard Angle Ladders

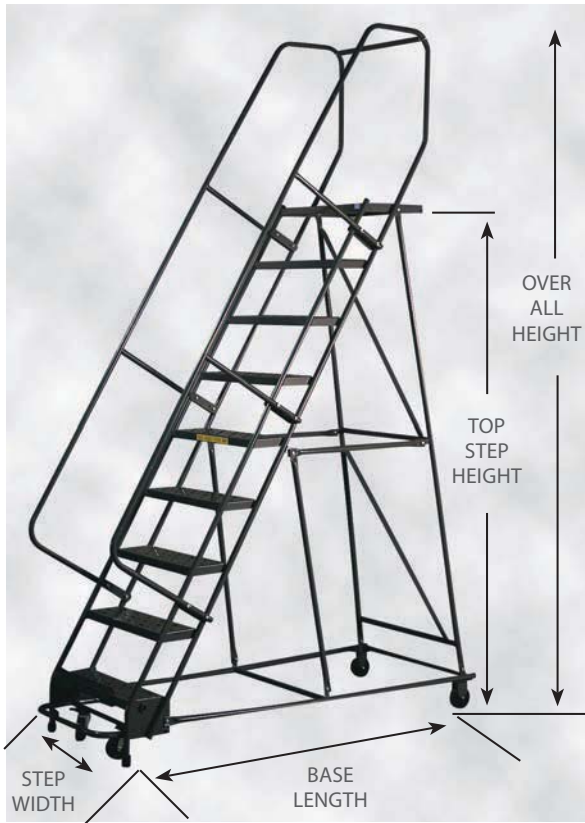

P9R2

Tread Styles:
G-Strut



Safety grating for surest footing when area is slippery or not clean.

G-Perf



Perforated steel tread for normal use where liquids are not present.

Choose between



50° SAF-T Angle
"For easy descent"



60° Standard Angle

| No. | Plat. | O.A. | Step Width 16" | | | | Step Width 24" | | | | Step Width 30" | | | | | | |
|---|-------|------|----------------|-----------|-----------|-----------|-------------------|------------------|------------------|---------------------|-------------------|------------------|------------------|---------------------|-------------------|------------------|------------------|
| | | | Steps | Ht. (In.) | Ht. | Model No. | G-Strut Model No. | G-Perf Model No. | Base W x L (In.) | Wt./Ship Wt. (Lbs.) | G-Strut Model No. | G-Perf Model No. | Base W x L (In.) | Wt./Ship Wt. (Lbs.) | G-Strut Model No. | G-Perf Model No. | Base W x L (In.) |
| No Handrail - All Welded (set-up) 4-2" Retractable Spring Casters | | | | | | | | | | | | | | | | | |
| 1 | 12 | 12 | S1N1* | P1N1* | 19½ x 16¼ | 19 | S1N2* | P1N2* | 26 x 18 | 24 | — | — | — | — | — | — | — |
| 2 | 20 | 20 | S2N1* | P2N1* | 22 x 24 | 25 | S2N2* | P2N2* | 30 x 24 | 30 | S2N3 | P2N3 | 33 x 24 | 34 | — | — | — |
| 3 | 30 | 30 | S3N1 | P3N1 | 22 x 32 | 31 | S3N2 | P3N2 | 30 x 32 | 40 | S3N3 | P3N3 | 33 x 32 | 44 | — | — | — |
| 4 | 40 | 40 | S4N1 | P4N1 | 22 x 37 | 37 | S4N2 | P4N2 | 30 x 37 | 50 | S4N3 | P4N3 | 33 x 37 | 54 | — | — | — |
| With Handrail - All Welded (set-up) 4-2" Retractable Spring Casters | | | | | | | | | | | | | | | | | |
| 2 | 20 | 53 | S2R1 | P2R1 | 22 x 24 | 33 | S2R2 | P2R2 | 30 x 24 | 43 | S2R3 | P2R3 | 33 x 24 | 47 | — | — | — |
| 3 | 30 | 63 | S3R1 | P3R1 | 22 x 32 | 41 | S3R2 | P3R2 | 30 x 32 | 48 | S3R3 | P3R3 | 33 x 32 | 59 | — | — | — |
| 4 | 40 | 73 | S4R1 | P4R1 | 22 x 37 | 53 | S4R2 | P4R2 | 30 x 37 | 62 | S4R3 | P4R3 | 33 x 37 | 67 | — | — | — |
| 5 | 50 | 83 | S5R1 | P5R1 | 22 x 44 | 62/142 | S5R2 | P5R2 | 30 x 44 | 70/150 | S5R3 | P5R3 | 33 x 44 | 75/171 | — | — | — |
| With Handrail - Knocked Down (KD) SAF-T Lock System 4-4" Casters - Below must ship crated. | | | | | | | | | | | | | | | | | |
| 6 | 60 | 93 | S6R1** | P6R1** | 28 x 55 | 95/175 | S6R2 | P6R2 | 32 x 55 | 109/189 | S6R3 | P6R3 | 36 x 55 | 119/215 | — | — | — |
| 7 | 70 | 103 | S7R1** | P7R1** | 28 x 62 | 104/201 | S7R2 | P7R2 | 32 x 62 | 121/218 | S7R3 | P7R3 | 36 x 62 | 130/247 | — | — | — |
| 8 | 80 | 113 | — | — | — | — | S8R2 | P8R2 | 32 x 68 | 130/214 | S8R3 | P8R3 | 36 x 68 | 142/259 | — | — | — |
| 9 | 90 | 123 | — | — | — | — | S9R2 | P9R2 | 32 x 76 | 148/250 | S9R3 | P9R3 | 36 x 76 | 164/289 | — | — | — |
| 10 | 100 | 133 | — | — | — | — | S10R2 | P10R2 | 32 x 82 | 164/266 | S10R3 | P10R3 | 36 x 82 | 182/307 | — | — | — |
| 11 | 110 | 143 | — | — | — | — | S11R2 | P11R2 | 32 x 90 | 177/286 | S11R3 | P11R3 | 36 x 90 | 201/333 | — | — | — |
| 12 | 120 | 153 | — | — | — | — | S12R2 | P12R2 | 32 x 96 | 209/368 | S12R3 | P12R3 | 36 x 96 | 223/382 | — | — | — |
| 13 | 130 | 173 | — | — | — | — | S13R2 | P13R2 | 40 x 103 | 220/379 | S13R3 | P13R3 | 40 x 103 | 236/395 | — | — | — |
| 14 | 140 | 183 | — | — | — | — | S14R2 | P14R2 | 40 x 108 | 233/398 | S14R3 | P14R3 | 40 x 108 | 248/413 | — | — | — |
| 15 | 150 | 193 | — | — | — | — | S15R2 | P15R2 | 40 x 115 | 242/407 | S15R3 | P15R3 | 40 x 115 | 264/429 | — | — | — |
| 16 | 160 | 203 | — | — | — | — | S16R2 | P16R2 | 40 x 121 | 255/420 | S16R3 | P16R3 | 40 x 121 | 282/447 | — | — | — |

*Ships UPS boxed with no extra packaging charges minimum 70 lb. charge for UPS.

** SAF-T Lock has single wheel.

Note: Overall height is platform height plus handrail height.

50° SAF-T™ Angle Ladders

Locking Systems:

Spring loaded caster (4)

For 2–4 step ladders. Retracting spring loaded casters with steel reinforced rubber tip feet



Spring Loaded Casters

(Standard) SAF-T Lock Locking Systems:

For 5–16 step ladders. Positive SAF-T lock with release secures ladder when an individual steps on the first step triggering the release bar. Caster carriage retracts allowing metal reinforced rubber-tipped feet to grip floor. Step on U-Tube bar and ladder becomes mobile on easy-roll plastic wheels.



SAF-T Lock



D8R2

| No. Steps | Plat. Ht. (In.) | O.A. Ht. (In.) | Step Width 16" | | | | Step Width 24" | | | | Step Width 30" | | | |
|---|-----------------|----------------|-------------------|------------------|------------------|---------------------|-------------------|------------------|------------------|---------------------|-------------------|------------------|------------------|---------------------|
| | | | G-Strut Model No. | G-Perf Model No. | Base W x L (In.) | Wt./Ship Wt. (Lbs.) | G-Strut Model No. | G-Perf Model No. | Base W x L (In.) | Wt./Ship Wt. (Lbs.) | G-Strut Model No. | G-Perf Model No. | Base W x L (In.) | Wt./Ship Wt. (Lbs.) |
| No Handrail - All Welded (set-up) 4-2" Retractable Spring Casters | | | | | | | | | | | | | | |
| 2 | 20 | 20 | D2N1* | PD2N1* | 21 x 26 | 24 | D2N2* | PD2N2* | 30 x 25 | 32 | D2N3 | PD2N3 | 33 x 25 | 39 |
| 3 | 30 | 30 | D3N1 | PD3N1 | 22 x 34 | 36 | D3N2 | PD3N2 | 30 x 34 | 40 | D3N3 | PD3N3 | 33 x 34 | 45 |
| 4 | 40 | 40 | D4N1 | PD4N1 | 22 x 45 | 45 | D4N2 | PD4N2 | 30 x 45 | 55 | D4N3 | PD4N3 | 33 x 45 | 51 |
| With Handrail - All Welded (set-up) 4-2" Retractable Spring Casters | | | | | | | | | | | | | | |
| 2 | 20 | 53 | D2R1 | PD2R1 | 22 x 25 | 33 | D2R2 | PD2R2 | 30 x 25 | 44 | D2R3 | PD2R3 | 33 x 25 | 58 |
| 3 | 30 | 63 | D3R1 | PD3R1 | 22 x 35 | 41 | D3R2 | PD3R2 | 30 x 34 | 59 | D3R3 | PD3R3 | 33 x 34 | 64 |
| 4 | 40 | 73 | D4R1 | PD4R1 | 22 x 45 | 54 | D4R2 | PD4R2 | 30 x 45 | 64 | D4R3 | PD4R3 | 33 x 45 | 68 |
| With Handrail - Knocked Down (KD) SAF-T Lock System 4-4" Casters - Below must ship crated. | | | | | | | | | | | | | | |
| 5 | 50 | 83 | D5R1** | PD5R1** | 28 x 62 | 84/164 | D5R2 | PD5R2 | 32 x 62 | 100/180 | D5R3 | PD5R3 | 36 x 62 | 109/205 |
| 6 | 60 | 93 | D6R1** | PD6R1** | 28 x 68 | 97/177 | D6R2 | PD6R2 | 32 x 68 | 110/190 | D6R3 | PD6R3 | 36 x 68 | 128/224 |
| 7 | 70 | 103 | D7R1** | PD7R1** | 28 x 76 | 107/204 | D7R2 | PD7R2 | 32 x 76 | 131/228 | D7R3 | PD7R3 | 36 x 76 | 153/270 |
| 8 | 80 | 113 | — | — | — | — | D8R2 | PD8R2 | 32 x 90 | 147/244 | D8R3 | PD8R3 | 36 x 90 | 167/284 |
| 9 | 90 | 123 | — | — | — | — | D9R2 | PD9R2 | 32 x 96 | 156/258 | D9R3 | PD9R3 | 36 x 96 | 184/309 |
| 10 | 100 | 133 | — | — | — | — | D10R2 | PD10R2 | 32 x 103 | 174/276 | D10R3 | PD10R3 | 36 x 103 | 193/318 |
| 11 | 110 | 143 | — | — | — | — | D11R2 | PD11R2 | 32 x 115 | 189/298 | D11R3 | PD11R3 | 36 x 115 | 206/338 |
| 12 | 120 | 153 | — | — | — | — | D12R2 | PD12R2 | 32 x 121 | 201/360 | D12R3 | PD12R3 | 36 x 121 | 221/380 |

* Ships UPS boxed with no extra packaging charges (minimum 70lb. charge for UPS). Overall height (O.A.) is platform height plus handrail height.

** Single steer wheel

Options

| Model No. | Description | Ladder Types | | | Office |
|-----------|----------------------|--------------------|-----------------|--------------|--------|
| | | 60° Standard Angle | 50° Saf-T Angle | "6 Wheeler"™ | |
| A | 42" Handrail | • | • | • | — |
| B | 21" Deep Top Step | •** | •*** | •*** | • |
| C | 28" Deep Top Step | •** | •*** | •*** | — |
| L | SAF-T Lock System | •* | •* | — | — |
| H | Skid Plate, 1-5 Step | • | • | — | — |
| FDT | Fold Down Tray | • | • | • | • |
| G44 | Outriggers 40" | • | • | • | — |
| G56 | Outriggers 54" | • | • | • | — |

* Available on 4 and 5 step models only,

** On 5 step must also add code L (SAF-T lock system)

*** Available only through 9 step models.

Replacement Parts


| Replacement Parts | | |
|-------------------|---|------------|
| Model No. | Description | Wt. (Lbs.) |
| RT | Rubber Tips reinforced (box of 4) | 1 |
| RB | 2 1/2" Rubber Bumpers (box of 2) | 2 |
| CS | Casters, spring 1–5 step ladders (except office ladders) — box of 4 — specify number of steps | 7 |
| | Casters (office ladder), spring 1–5 step ladders (box of 4), specify number of steps | 7 |

Call for a quote on Options / Replacement Parts.

The Gillis "6-Wheeler"™

Pat. No. 5,941,341 All rights reserved.

- Turns on a Dime!
- Ships knocked down (KD)
- Double-Deep Top Step
- Ideal for applications with narrow aisles or confined space
- Casters
 - > 2 (4") Swivel-Front
 - > 2 (4") Rigid-Back
 - > 2 (6") Rigid-Center
- Handrails
 - 30" 7-12 Steps
 - 42" 13-16 Steps
- Turns in 1/2 the Radius of Standard Ladders



P11R2-RT




PD8R2-RT



"6-Wheeler" SAF-T lock retracts middle and front casters for climbing safety.

60° Standard Angle "6-Wheeler"™



| Step Width 24" | | | | | | | Step Width 30" | | | | |
|----------------|-----------|----------|-----------|-----------|-------------|------------|----------------|-----------|-------------|------------|--|
| No. | Plat. Ht. | O.A. Ht. | G-Strut | G-Perf | Base | Wt./Ship | G-Strut | G-Perf | Base | Wt./Ship | |
| Steps | (In.) | (In.) | Model No. | Model No. | W x L (In.) | Wt. (Lbs.) | Model No. | Model No. | W x L (In.) | Wt. (Lbs.) | |
| 7 | 70 | 105 | S7R2-RT | P7R2-RT | 32 x 62 | 146/243 | S7R3-RT | P7R3-RT | 36 x 62 | 149/243 | |
| 8 | 80 | 115 | S8R2-RT | P8R2-RT | 32 x 68 | 154/251 | S8R3-RT | P8R3-RT | 36 x 68 | 162/279 | |
| 9 | 90 | 125 | S9R2-RT | P9R2-RT | 32 x 76 | 173/275 | S9R3-RT | P9R3-RT | 36 x 76 | 196/321 | |
| 10 | 100 | 135 | S10R2-RT | P10R2-RT | 32 x 82 | 185/287 | S10R3-RT | P10R3-RT | 36 x 82 | 208/333 | |
| 11 | 110 | 145 | S11R2-RT | P11R2-RT | 32 x 90 | 199/308 | S11R3-RT | P11R3-RT | 36 x 90 | 220/352 | |
| 12 | 120 | 155 | S12R2-RT | P12R2-RT | 32 x 96 | 215/374 | S12R3-RT | P12R3-RT | 36 x 96 | 229/388 | |
| 13 | 130 | 173 | S13R2-RT | P13R2-RT | 40 x 103 | 231/390 | S13R3-RT | P13R3-RT | 40 x 103 | 254/413 | |
| 14 | 140 | 183 | S14R2-RT | P14R2-RT | 40 x 108 | 245/410 | S14R3-RT | P14R3-RT | 40 x 108 | 262/425 | |
| 15 | 150 | 193 | S15R2-RT | P15R2-RT | 40 x 115 | 259/424 | S15R3-RT | P15R3-RT | 40 x 115 | 278/443 | |
| 16 | 160 | 203 | S16R2-RT | P16R2-RT | 40 x 121 | 278/443 | S16R3-RT | P16R3-RT | 40 x 121 | 298/463 | |

50° SAF-T Angle "6-Wheeler"™




| Step Width 24" | | | | | | Step Width 30" | | | | |
|----------------|-----------|----------|-----------|-----------|-------------|----------------|-----------|-----------|-------------|------------|
| No. | Plat. Ht. | O.A. Ht. | G-Strut | G-Perf | Base | Wt./Ship | G-Strut | G-Perf | Base | Wt./Ship |
| Steps | (In.) | (In.) | Model No. | Model No. | W x L (In.) | Wt. (Lbs.) | Model No. | Model No. | W x L (In.) | Wt. (Lbs.) |
| 7 | 70 | 105 | D7R2-RT | PD7R2-RT | 32 x 76 | 143/240 | D7R3-RT | PD7R3-RT | 36 x 76 | 166/283 |
| 8 | 80 | 115 | D8R2-RT | PD8R2-RT | 32 x 90 | 154/251 | D8R3-RT | PD8R3-RT | 36 x 90 | 181/298 |
| 9 | 90 | 125 | D9R2-RT | PD9R2-RT | 32 x 96 | 172/274 | D9R3-RT | PD9R3-RT | 36 x 96 | 196/321 |
| 10 | 100 | 135 | D10R2-RT | PD10R2-RT | 32 x 103 | 188/295 | D10R3-RT | PD10R3-RT | 36 x 103 | 208/333 |
| 11 | 110 | 145 | D11R2-RT | PD11R2-RT | 32 x 115 | 195/304 | D11R3-RT | PD11R3-RT | 36 x 115 | 220/352 |
| 12 | 120 | 155 | D12R2-RT | PD12R2-RT | 32 x 121 | 203/362 | D12R3-RT | PD12R3-RT | 36 x 121 | 229/388 |

The “Multi-Directional”™ Ladder by Gillis

The NEW Gillis “Multi-Directional Ladder”™ is easy to maneuver and ergonomically friendly. With one simple push this ladder will go any direction you want it—a real time saver!

- Ships knocked down (KD)
- Double-Deep Top Step
- Step width is 24"
- Available in either grip strut or perforated step designs
- 50° SAF-T Angle and 60° Standard Angle styles
- (4) 4" swivel casters
- Includes 30" Handrail
- Overall height (O.A.) is platform height plus handrail height

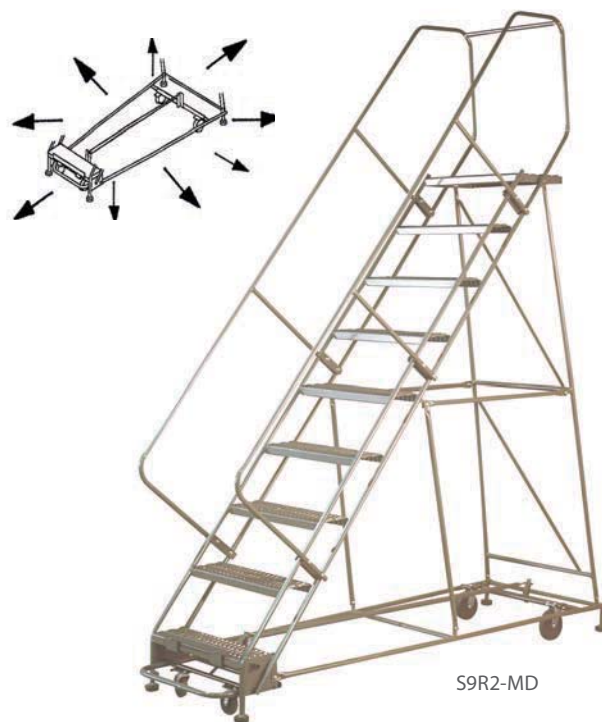

50° SAF-T Angle Multi-Directional Style

| No. Steps | Plat. Ht. (In.) | O.A. Ht. (In.) | G-Strut Model No. | G-Perf Model No. | Base W x L (In.) | Wt./Ship Wt. (Lbs.) |
|--|-----------------|----------------|-------------------|------------------|------------------|---------------------|
| With Handrail - Knocked Down (KD) | | | | | | |
| 6 | 60 | 93 | D6R2-MD | PD6R2-MD | 32 x 68 | 110/190 |
| 7 | 70 | 103 | D7R2-MD | PD7R2-MD | 32 x 76 | 131/228 |
| 8 | 80 | 113 | D8R2-MD | PD8R2-MD | 32 x 90 | 147/244 |
| 9 | 90 | 123 | D9R2-MD | PD9R2-MD | 32 x 96 | 156/258 |
| 10 | 100 | 133 | D10R2-MD | PD10R2-MD | 32 x 103 | 174/276 |
| 11 | 110 | 143 | D11R2-MD | PD11R2-MD | 32 x 115 | 189/298 |
| 12 | 120 | 153 | D12R2-MD | PD12R2-MD | 32 x 121 | 201/360 |

Locking System: (Std.) SAF-T Lock
 Positive SAF-T lock with release secures ladder when an individual steps on the first step triggering the release bar. Caster carriage retracts allowing metal reinforced rubber-tipped feet to grip floor. Step on U-Tube bar and ladder becomes mobile on easy-roll wheels.



Step Treads: G-Strut
 Safety grating for surest footing when area is slippery or not clean.



G-Perf
 Perforated steel tread for normal use where liquids are not present.



60° Standard Angle Multi-Directional Style

| No. Steps | Plat. Ht. (In.) | O.A. Ht. (In.) | G-Strut Model No. | G-Perf Model No. | Base W x L (In.) | Wt./Ship Wt. (Lbs.) |
|--|-----------------|----------------|-------------------|------------------|------------------|---------------------|
| With Handrail - Knocked Down (KD) | | | | | | |
| 6 | 60 | 93 | S6R2-MD | P6R2-MD | 32 x 55 | 109/189 |
| 7 | 70 | 103 | S7R2-MD | P7R2-MD | 32 x 62 | 121/218 |
| 8 | 80 | 113 | S8R2-MD | P8R2-MD | 32 x 68 | 130/214 |
| 9 | 90 | 123 | S9R2-MD | P9R2-MD | 32 x 76 | 148/250 |
| 10 | 100 | 133 | S10R2-MD | P10R2-MD | 32 x 82 | 164/266 |
| 11 | 110 | 143 | S11R2-MD | P11R2-MD | 32 x 90 | 177/286 |
| 12 | 120 | 153 | S12R2-MD | P12R2-MD | 32 x 96 | 209/368 |

Mobile Mechanics Ladders

- Features 21" deep top platform
- Access chain with detachable closure
- Handles provide easy mobility
- 4" rigid casters in rear
- In G-Strut or G-Perf tread
- 60 degree angle

| Step Width 24" | | | | | | | |
|-------------------|------------------|-----------|--------------------|-------------------|------------------|------------|--|
| G-Strut Model No. | G-Perf Model No. | No. Steps | Platform Ht. (In.) | Overall Ht. (In.) | Base W x L (In.) | Wt. (Lbs.) | |
| M4R2 | MP4R2 | 4 | 40 | 73 | 30 x 50 | 82 | |
| M5R2 | MP5R2 | 5 | 50 | 83 | 30 x 57 | 89 | |
| M6R2 | MP6R2 | 6 | 60 | 93 | 30 x 64 | 96 | |
| M7R2 | MP7R2 | 7 | 70 | 103 | 30 x 71 | 103 | |



M5R2 Mobile Mechanics Ladder

Truck-N-Maintenance™ Ladders

- 50 degree climbing angle ideal for loading and unloading small packages from a truck
- 10" Semi-pneumatic wheels in the rear with skid plates on the front 2 legs
- 21" deep top step standard. Add suffix "-C" for a 28" deep top step
- 450 lb. capacity
- Available with welded crossbar for normal applications or w/chain guard for walk-thru applications

| Welded Crossbar | | Chain Crossbar | | No. Steps | Platform Ht. (In.) | Overall Ht. (In.) | Base W x L (In.) | Wt. (Lbs.) |
|-----------------------|------------------|-------------------|------------------|-----------|--------------------|-------------------|------------------|------------|
| G-Strut Model No. | G-Perf Model No. | G-Strut Model No. | G-Perf Model No. | | | | | |
| 16" Step Width | | | | | | | | |
| TH2R1 | PTH2R1 | TH2R1X | PTH2R1X | 2 | 20 | 53 | 27 x 44 | 70 |
| TH3R1 | PTH3R1 | TH3R1X | PTH3R1X | 3 | 30 | 63 | 27 x 52 | 82 |
| TH4R1 | PTH4R1 | TH4R1X | PTH4R1X | 4 | 40 | 73 | 27 x 60 | 90 |
| TH5R1 | PTH5R1 | TH5R1X | PTH5R1X | 5 | 50 | 83 | 27 x 68 | 98 |
| 24" Step Width | | | | | | | | |
| TH2R2 | PTH2R2 | TH2R2X | PTH2R2X | 2 | 20 | 53 | 36 x 44 | 91 |
| TH3R2 | PTH3R2 | TH3R2X | PTH3R2X | 3 | 30 | 63 | 36 x 52 | 99 |
| TH4R2 | PTH4R2 | TH4R2X | PTH4R2X | 4 | 40 | 73 | 38 x 60 | 107 |
| TH5R2 | PTH5R2 | TH5R2X | PTH5R2X | 5 | 50 | 83 | 38 x 68 | 115 |



TH4R2X Truck-N-Maintenance Ladder

Truck-N-Dock™ Ladders

- Designed with removable side and back chains for easy loading and unloading from any direction
- Large 36" x 48" top platform and 50 degree climbing angle are ideal for maximum efficiency
- Standard with our heavy duty G-strut tread for a 500 lb. capacity
- Front SAF-T Lock with 2½" diameter rubber pads are standard along with 10" semi-pneumatic rear wheels for rough surfaces

| Step Width 36" | | | | | | |
|----------------|-------|-----------|-----------|-------------|--------|--|
| Model | No. | Platform | Overall | Base | Wt. | |
| No. | Steps | Ht. (In.) | Ht. (In.) | W x L (In.) | (Lbs.) | |
| TD4R34L | 4 | 40 | 73 | 46 x 81 | 228 | |
| TD5R34L | 5 | 50 | 83 | 46 x 90 | 244 | |
| TD6R34L | 6 | 60 | 93 | 46 x 99 | 260 | |

May require special LTL carrier, Maximum height is 96" on most trailers.



TD4R34L Truck-N-Dock Ladder

Crossover Ladders

- Use as a stairway over conveyors or other obstacles
- For permanent or temporary installations
- Foot plates can be bolted to the floor for permanency
- Heavy duty, all-welded construction
- 24" wide steps in slip-resistant G-Strut tread or standard G-Perf tread
- Ships in one piece, already assembled
- 50 degree angle

| G-Strut Model No. | G-Perf Model No. | No. Steps | Clear Width (In.) | Clear Ht. (In.) | Overall Ht. (In.) | Overall Length (In.) |
|-------------------|------------------|-----------|-------------------|-----------------|-------------------|----------------------|
| S4CR2C | P4CR2C | 4 | 12 | 36 | 70 | 79 |
| S4CR2D | P4CR2D | 4 | 19 | 36 | 70 | 86 |
| S4CR2E | P4CR2E | 4 | 26 | 36 | 70 | 93 |
| S4CR2F | P4CR2F | 4 | 33 | 36 | 70 | 100 |
| S4CR2G | P4CR2G | 4 | 40 | 36 | 70 | 107 |
| S5CR2C | P5CR2C | 5 | 12 | 46 | 80 | 96 |
| S5CR2D | P5CR2D | 5 | 19 | 46 | 80 | 103 |
| S5CR2E | P5CR2E | 5 | 26 | 46 | 80 | 110 |
| S5CR2F | P5CR2F | 5 | 33 | 46 | 80 | 117 |
| S5CR2G | P5CR2G | 5 | 40 | 46 | 80 | 124 |
| S6CR2C | P6CR2C | 6 | 12 | 56 | 90 | 113 |
| S6CR2D | P6CR2D | 6 | 19 | 56 | 90 | 120 |
| S6CR2E | P6CR2E | 6 | 26 | 56 | 90 | 127 |
| S6CR2F | P6CR2F | 6 | 33 | 56 | 90 | 134 |
| S6CR2G | P6CR2G | 6 | 40 | 56 | 90 | 141 |



S5CR2C 50° Crossover Ladder

Office Ladders

- Solid steel rubber covered steps
- 55 degree climb angle
- 10" deep top step—Other steps 7" deep
- Beige unless specified—Gray-Blue available
- 16" wide steps
- 20" top step available

| Model No. | No. Steps | Plat. Ht. (In.) | Handrail Ht. (In.) | Overall Ht. (In.) | Base W x L (In.) | Wt. (Lbs.) |
|--|-----------|-----------------|--------------------|-------------------|------------------|------------|
| No Handrail - All Welded (set-up) 4-3" Retractable Spring Casters | | | | | | |
| F1N1* | 1 | 13 | N/A | 13 | 20 x 16 | 14 |
| F2N1* | 2 | 20 | N/A | 20 | 21 x 20 | 20 |
| F3N1 | 3 | 30 | N/A | 30 | 21 x 29 | 26 |
| F4N1 | 4 | 40 | N/A | 40 | 21 x 36 | 33 |
| With Handrail - All Welded (set-up) 4-3" Retractable Spring Casters | | | | | | |
| F2R1 | 2 | 20 | 24 | 53 | 21 x 20 | 30 |
| F3R1 | 3 | 30 | 24 | 63 | 21 x 29 | 36 |
| F4R1 | 4 | 40 | 30 | 73 | 21 x 36 | 50 |
| F5R1 | 5 | 50 | 30 | 83 | 21 x 44 | 54 |

* Ships UPS boxed with no extra packaging charges. Others ship on a pallet at no additional charge.



F3N1 Office Ladder

Work Platforms

- 500 lb. Capacity
- Set up all-welded
- 55 degree climb angle
- G-Strut Steps
- Rear legs have 4" rigid caster
- Front legs have 2½" diameter rubber pads
- SAF-T Lock System available



W3R23 Work Platform

| No. Steps | Platform Ht. (In.) | O.A. Ht. (In.) | Platform 24 x 24 (W x L) | | Platform 24 x 36 (W x L) | | Platform 24 x 48 (W x L) | | Platform 36 x 36 (W x L) | | Platform 36 x 48 (W x L) | |
|--|--------------------|----------------|--------------------------|------------|--------------------------|------------|--------------------------|------------|--------------------------|------------|--------------------------|------------|
| | | | Model No. | Wt. (Lbs.) | Model No. | Wt. (Lbs.) | Model No. | Wt. (Lbs.) | Model No. | Wt. (Lbs.) | Model No. | Wt. (Lbs.) |
| No Handrail - All Welded (set-up) | | | | | | | | | | | | |
| 2 | 20 | 20 | W2N22 | 46 | W2N23 | 54 | W2N24 | 67 | W2N33 | 70 | W2N34 | 83 |
| 3 | 30 | 30 | W3N22 | 54 | W3N23 | 62 | W3N24 | 74 | W3N33 | 81 | W3N34 | 94 |
| 4 | 40 | 40 | W4N22 | 62 | W4N23 | 69 | W4N24 | 81 | W4N33 | 92 | W4N34 | 105 |
| With Handrail - All Welded (set-up) | | | | | | | | | | | | |
| 2 | 20 | 51 | W2R22 | 62 | W2R23 | 72 | W2R24 | 88 | W2R33 | 105 | W2R34 | 121 |
| 3 | 30 | 61 | W3R22 | 70 | W3R23 | 83 | W3R24 | 97 | W3R33 | 116 | W3R34 | 132 |
| 4 | 40 | 71 | W4R22 | 78 | W4R23 | 97 | W4R24 | 108 | W4R33 | 127 | W4R34 | 143 |
| 5 | 50 | 81 | W5R22 | 86 | W5R23 | 108 | W5R24 | 119 | W5R33 | 138 | W5R34 | 154 |

For base widths, add 3" to platform widths.
For base lengths, add to platform lengths - 8" for 2-Step models, 14" for 3-Step, 21" for 4-Step and 28" for 5-Step.

Heavy Duty Fixed Steel Ladders

Standard Style

- ¾" schedule 40 pipe (1 ½" diameter) side rails
- 18" wide x ¾" solid round serrated rungs
- ¼" x 2" flat standoffs hold ladder 7" from wall
- Painted yellow. Other colors available

Walk-Thru Style

(In Addition to Standard Style Features)

- 42" Walk-Thru extension complete with handrails for easy access and exit from the ladder
- 24" wide overall. 18" wide ladder rungs
- Walk-Thru base is suitable for roof top mounting


Heavy Duty Fixed Steel Ladders

| No. of Rungs | Rung Ht. (Ft.) | Standard Style | | | | Walk-Thru Style | | | |
|--------------|----------------|----------------|---------------------|-----------|---------------------|-----------------|---------------------|-----------|---------------------|
| | | No Cage | | With Cage | | No Cage | | With Cage | |
| | | Model | Wt./Ship Wt. (Lbs.) | Model | Wt./Ship Wt. (Lbs.) | Model | Wt./Ship Wt. (Lbs.) | Model | Wt./Ship Wt. (Lbs.) |
| 2 | 1 | S2 | 11/56 | — | — | W2 | 31/107 | — | — |
| 3 | 2 | S3 | 15/60 | — | — | W3 | 35/111 | — | — |
| 4 | 3 | S4 | 23/68 | — | — | W4 | 43/131 | — | — |
| 5 | 4 | S5 | 27/72 | — | — | W5 | 47/135 | — | — |
| 6 | 5 | S6 | 32/77 | — | — | W6 | 52/161 | — | — |
| 7 | 6 | S7 | 36/96 | — | — | W7 | 56/180 | — | — |
| 8 | 7 | S8 | 41/101 | — | — | W8 | 61/181 | — | — |
| 9 | 8 | S9 | 46/106 | — | — | W9 | 66/186 | — | — |
| 10 | 9 | S10 | 50/110 | — | — | W10 | 70/190 | — | — |
| 11 | 10 | S11 | 55/115 | SC11 | 100/168 | W11 | 75/195 | WC11 | 120/188 |
| 12 | 11 | S12 | 59/119 | SC12 | 107/175 | W12 | 79/199 | WC12 | 127/195 |
| 13 | 12 | S13 | 63/123 | SC13 | 129/257 | W13 | 83/203 | WC13 | 149/277 |
| 14 | 13 | S14 | 67/157 | SC14 | 138/327 | W14 | 87/207 | WC14 | 158/347 |
| 15 | 14 | S15 | 71/161 | SC15 | 147/336 | W15 | 91/211 | WC15 | 167/356 |
| 16 | 15 | S16 | 75/165 | SC16 | 155/344 | W16 | 95/215 | WC16 | 175/364 |
| 17 | 16 | S17 | 79/169 | SC17 | 175/364 | W17 | 99/219 | WC17 | 195/384 |
| 18 | 17 | S18 | 83/173 | SC18 | 185/374 | W18 | 103/227 | WC18 | 205/394 |
| 19 | 18 | S19 | 87/207 | SC19 | 194/380 | W19 | 107/229 | WC19 | 214/400 |
| 20 | 19 | S20 | 91/211 | SC20 | 200/383 | W20 | 111/231 | WC20 | 220/403 |
| 21 | 20 | S21 | 96/216 | SC21 | 235/415 | — | — | WC21 | 255/435 |
| 22 | 21 | — | — | SC22 | 244/424 | — | — | WC22 | 264/444 |
| 23 | 22 | — | — | SC23 | 254/457 | — | — | WC23 | 274/454 |
| 24 | 23 | — | — | SC24 | 261/464 | — | — | WC24 | 281/461 |
| 25 | 24 | — | — | SC25 | 283/486 | — | — | WC25 | 303/483 |
| 26 | 25 | — | — | SC26 | 292/517 | — | — | WC26 | 312/537 |
| 27 | 26 | — | — | SC27 | 301/526 | — | — | WC27 | 321/546 |
| 28 | 27 | — | — | SC28 | 308/558 | — | — | WC28 | 328/553 |
| 29 | 28 | — | — | SC29 | 332/582 | — | — | WC29 | 352/577 |
| 30 | 29 | — | — | SC30 | 339/614 | — | — | WC30 | 359/634 |



S13 Standard Style

SC13

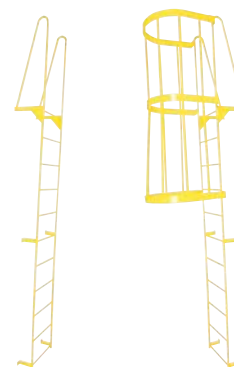

W11 Walk Thru Style

WC11

Permanent Dock Ladders

| Model No. | No. Steps | Dock Height (In.) | Wt. (Lbs.) |
|-----------|-----------|-------------------|------------|
| W2 | 2 | 24 | 31 |
| W3 | 3 | 36 | 35 |
| W4 | 4 | 48 | 43 |
| W5 | 5 | 60 | 47 |
| W6 | 6 | 72 | 52 |
| W7 | 7 | 84 | 56 |
| W8 | 8 | 96 | 61 |
| W9 | 9 | 108 | 66 |
| W10 | 10 | 120 | 70 |



W4 Permanent Dock Ladder

Fixed Steel Ladder Options

| Model No. | Description |
|-----------|--|
| CG | Cage Guard |
| LG | Ladder Guard |
| SC | Walk-Thru Chain |
| SOPL | Standoff Platform, 36 x 36, Left side entry |
| SOPR | Standoff Platform, 36 x 36, Right side entry |
| FMB | Floor mounting brackets (set of 2) |

Call for quote.



Cage Guard option for fixed steel ladders. Locks to prevent entry.

To place an order,
contact your dealer today!

Step up to a higher level of quality, durability and value.

Greater profitability, efficiency, productivity, and safety are all within your reach when you put Gillis-Jarke platforms from SPG to work in your facilities. We offer you the platform options you need to handle the toughest jobs in the toughest work environments.

While the uses of our platforms may vary, each offers you superior stability, sturdiness, durability and versatility. Whether you use our platforms for maintenance work, inventory control, manufacturing, order picking, repair work or a wide variety of other applications, Gillis-Jarke has the solutions you need to improve the performance of your entire operation.

All of our work platforms help you eliminate the time-consuming need to set up ladders and scaffolds. But, that's only a beginning.

Here is just a preview of what our platforms offer:

- The Jarke forklift work platform offers you 1,000 lbs. capacity, a standard tool tray, and a slip-resistant, diamond tread surface
- Gillis forklift aerial platforms offer 1,000 lbs. capacity, side protection, a heavy-duty deck with a slip-resistant diamond plate, and essential options such as a tool tray and light bulb caddy
- The Gillis adjustable 1-step platform includes ergonomic matting that brings greater comfort — and productivity — to workers who are on their feet for long periods

Expect More...

Value and versatility. Quality and convenience. Innovative designs and durability. If you want to take productivity to a higher level in your facilities, choose Gillis-Jarke platforms from SPG.



Forklift Aerial Platforms

- 1000 lb. capacity
- Deck is heavy duty 10 gauge diamond plate
- 4" high toe guards all sides
- Mast chain included
- OSHA / ANSI compliant, CAL-OSHA riser option available
- Side protection
 - > 42" high guard rails—2 sides
 - > Truckside is expanded metal
 - > Entry side is either double chain or latching swing gate



Swing gate type shown with optional tool tray



Model FWP44 shown with optional light bulb caddy, riser, tool tray and casters

| Model No. | Platform W x D (In.) | Forklift Pockets (In.) | Inner Dim. Between Forklift Pockets | Overall Height (In.) | Wt. (Lbs.) | Gate Type |
|--|----------------------|------------------------|-------------------------------------|----------------------|------------|-----------|
| All Welded (Set-Up) - Without Casters | | | | | | |
| FWP36S | 36 x 36 | 2½ x 8 | 16½ | 65 | 143 | Swing |
| FWP43S | 42 x 36 | 2½ x 8 | 18 | 65 | 155 | Chain |
| Knocked Down(KD) - Without Casters | | | | | | |
| FWP34† | 36 x 48 | 2½ x 8 | 16½ | 45 | 186 | Swing |
| FWP44† | 48 x 40 | 2½ x 8 | 20½ | 45 | 197 | Chain |

Call about our QUICK SHIP program

Platform Accessories

| Description | FWP36S | FWP43S | FWP34 | FWP44 | Wt. (Lbs.) |
|------------------|---------|--------|---------|-------|------------|
| Casters | CSFWP | CSFWP | CSFWP | CSFWP | 7 |
| Tool Tray | TT34/36 | TT43 | TT34/36 | TT44 | 9 |
| 24" Screen Riser | — | — | R34 | R44 | 16 |
| Light Bulb Caddy | LBC | LBC | LBC | LBC | 15 |
| Cal-Osha Riser | — | — | R34-A | R44-A | 31 |



Casters



24" Screen Riser



Shown with optional cal-OSHA riser



Tool Tray



Light Bulb Caddy

Adjustable 1-Step Platform

- Available with our G-Strut tread for wet or oily environments or with recessed ergonomic matting for comfort
- Easily adjust the threaded inserts for proper height
- Ergonomic matting is ideal for machine operators or anyone on their feet for long periods of time
- Adjustable from 5–8 inches or 9–14 inches



Optional Ergonomic Matting Model WSE1N23-5



Adjustable 1- Step Platform Model W1N23-9

| Base W x L (In.) | 5" - 8" Adjustable | | | 9" - 14" Adjustable | | |
|---------------------|---------------------|-----------------------|---------------|---------------------|-----------------------|---------------|
| | No Mat Model No. | With Mat Model No. | Wt. (Lbs.) | No Mat Model No. | With Mat Model No. | Wt. (Lbs.) |
| 24 x 24 | W1N22-5* | WSE1N22-5* | 24 | W1N22-9* | WSE1N22-9* | 24 |
| 24 x 36 | W1N23-5* | WSE1N23-5* | 36 | W1N23-9* | WSE1N23-9* | 34 |
| 24 x 48 | W1N24-5 | WSE1N24-5 | 50 | W1N24-9 | WSE1N24-9 | 54 |
| 24 x 60 | W1N25-5 | WSE1N25-5 | 64 | W1N25-9 | WSE1N25-9 | 69 |
| 24 x 72 | W1N26-5 | WSE1N26-5 | 78 | W1N26-9 | WSE1N26-9 | 84 |
| 24 x 96 | W1N28-5 | WSE1N28-5 | 92 | W1N28-9 | WSE1N28-9 | 99 |

* Ships UPS with 70lb. minimum charge.

To place an order,
contact your dealer today!

More choices and superior performance to really get your business rolling.

What sets SPG carts apart from all the rest? Unique design features, quality construction, value driven price points, generous capacities, proven durability, unique models designed for specific applications, and versatile models engineered to handle any job you've got. We make all of this available to you.

But, what really sets our carts apart is the company that brings them to you. Beyond a broad selection, beyond the ruggedness, quality, and low cost, we offer you superior service that can rush you the equipment you need, and the technical support so essential both before and after purchase.

On the following pages, you'll discover our vast line-up of carts. Of course, you'll find them just about anywhere—in warehouses, distribution centers, factories, laboratories, foodservice operations, healthcare institutions, retail back-rooms, and more.


While our carts are very competitively priced, they're also resistance welded for greater strength and offer you important performance advantages—such as our unique quick release caster bracket for fast, easy bolt-on replacement of casters.

Our broad product range includes:

- Stock carts and trucks
- Industrial carts for pipe, lumber and cylinders
- Pallet trucks
- Lift trucks & tables
- U boats
- Platform trucks
- Wire and stainless steel carts
- Security units
- Mobile workbenches
- Mail carts

Expect More...

The right price. The best service. Superior performance. Rugged durability. When it comes to getting your business rolling, SPG offers you everything you need.

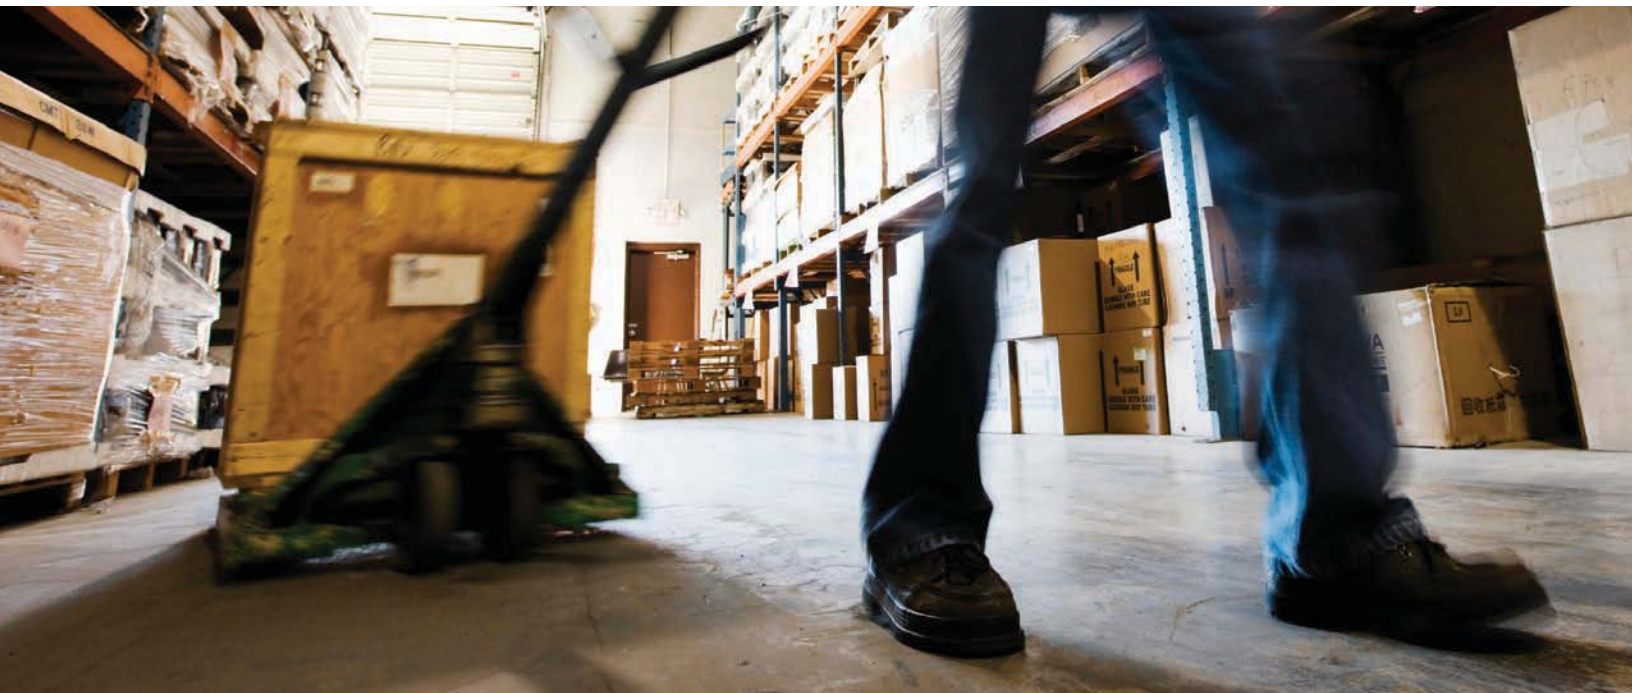

STOCK CARTS

Rolling Service Stock Carts

- Made of heavy gauge steel
- Standard push handles
- Unique quick release keyslot caster brackets with two 5" rigid and two 5" swivel casters, rubber
- 2 or 3 shelf units with 1½" lip or 3" lip up
- 1,000 lb. capacity
- For smooth on and off loading, order lips down suffix "LD"
- Gray finish
- F.O.B. IL

With 1½" Lip Up

| Model No. | D x W x H (In.) | Wt. (Lbs.) |
|------------------------|-----------------|------------|
| 2 - Shelf Units | | |
| GRSC1830-2R | 18 x 30 x 35 | 58 |
| GRSC1836-2R | 18 x 36 x 35 | 63 |
| 3 - Shelf Units | | |
| GRSC1830-3R | 18 x 30 x 35 | 73 |
| GRSC1836-3R | 18 x 36 x 35 | 85 |

With 3" Lip Up

| Model No. | D x W x H (In.) | Wt. (Lbs.) |
|------------------------|-----------------|------------|
| 2 - Shelf Units | | |
| G3RSC1630-2R | 16 x 30 x 35 | 50 |
| G3RSC1836-2R | 18 x 36 x 35 | 75 |
| 3 - Shelf Units | | |
| G3RSC1630-3R | 16 x 30 x 35 | 80 |
| G3RSC1836-3R | 18 x 36 x 35 | 90 |

For additional colors, capacities & casters: Please contact factory.



With 1½" Lip Up



With 3" Lip Up

Ladder Carts

- Heavy gauge steel
- 2-step spring loaded ladder standard, grips floor when stepped on
- Tiered shelf design standard to maximize space and maneuverability
- 2 rigid and 2 swivel 5" rubber casters
- 1½" lip up on all shelves
- Drawer option add suffix "D"
- Powder coat paint finish
- F.O.B. IL

| Model No. | O.A. Size | No. of | Ladder | Topstep | Wt. |
|-----------|-------------|---------|--------------|--------------|--------|
| Steel | D x W (In.) | Shelves | Height (In.) | Height (In.) | (Lbs.) |
| GLC2036-2 | 20 x 41½ | 2 | 63 | 26 | 75 |
| GLC2048-2 | 20 x 53½ | 2 | 63 | 26 | 90 |
| GLC2048-3 | 20 x 53½ | 3 | 63 | 26 | 150 |



GLC2036-3D

Multi-Bin Service Carts

- Heavy gauge steel
- 1,000 lb. capacity
- Provides double-sided access to supplies
- Comes standard with push handle and center brackets "to hang totes"
- 5" rubber casters feature our unique quick release keyslot caster brackets
- Gray finish
- F.O.B. IL.

| Model No. | D x W x H (In.) | No. & Size of Bins | Wt. (Lbs.) |
|-----------------|-----------------|-----------------------|------------|
| GRSC2436BLP48-R | 24 x 36 x 35 | 48-6"W x 11"L x 5"H | 150 |
| GRSC2436BLP-R | 24 x 36 x 35 | Without Bins | 110 |
| GRSC1836BLP-R | 18 x 36 x 35 | Without Bins | 110 |
| GRSC2442BLP24-R | 24 x 42 x 35 | 24-8½' W x 10"L x 7"H | 155 |
| GRSC2442BLP-R | 24 x 42 x 35 | Without Bins | 135 |



GRSC2436BLP48-R

UTILITY CARTS

2-Shelf Shop Trucks

- Shelves made of heavy gauge steel
- 1,000 lb. capacity
- Ergonomic offset handle
- Unique quick release keyslot caster brackets standard
- 5" rubber casters standard (2 rigid and 2 swivel)
- Powder coat finish
- F.O.B. IL
- Top shelf is 25" above floor
- 16" bottom to top shelf opening

| Model No. | D x W (In.) | Wt. (Lbs.) |
|-----------|-------------|------------|
| GLD2430-R | 24 x 30 | 84 |
| GLD2436-R | 24 x 36 | 94 |
| GLD2442-R | 24 x 42 | 105 |
| GLD2448-R | 24 x 48 | 109 |
| GLD2460-R | 24 x 60 | 120 |
| GLD3042-R | 30 x 42 | 125 |
| GLD3048-R | 30 x 48 | 126 |
| GLD3060-R | 30 x 60 | 140 |



GLD3042-R

Drawer Service Carts

- 1,000 lb. capacity
- Two drawers 20"D x 14"W x 5"H with keylock. 1½" deep shelves. Push handle. Comes standard with 2-rigid and 2-swivel casters which mount in our quick release keyslot caster brackets
- Powder coat finish
- F.O.B. IL

| Model No. | Description | D x W x H (In.) | Wt. (Lbs.) |
|-----------------|------------------------|-----------------|------------|
| GRSCDDS2236-R | 2 side by side drawers | 22 x 36 x 35 | 133 |
| GRSCDBT6B2236-R | 2 drawers, w/ 6 bins* | 22 x 36 x 35 | 155 |
| GRSCDB2236-R | 2 drawers, no bins | 22 x 36 x 35 | 133 |

* 8-1/4 W x 14-3/4 D x 7" H



GRSCDDS2236-R



GRSCDBT6B2236-R

Instrument Carts

- Shelves made of heavy gauge steel
- Available with 2 shelves or 3 shelves
- Top shelf has lips down
- Additional shelves have lips up
- Push handle on 3-shelf units
- Non-slip ribbed vinyl matting glued to metal shelf
- 8" fully pneumatic casters (2-rigid, 2-swivel)
- 1,000 lb. capacity
- 2 shelf unit is 29" to top shelf, with 16" shelf clearance
- 3 shelf unit is 55" to top shelf, with 20" shelf clearance
- Finish is tan
- F.O.B. IL.

| D x W (In.) | 2-Shelf | | 3-Shelf | |
|-------------|------------|------------|------------|------------|
| | Model No. | Wt. (Lbs.) | Model No. | Wt. (Lbs.) |
| 24 x 36 | GLIC2436-2 | 105 | GLIC2436-3 | 145 |
| 24 x 48 | GLIC2448-2 | 114 | GLIC2448-3 | 163 |
| 30 x 36 | GLIC3048-2 | 131 | GLIC3048-3 | 187 |
| 30 x 48 | GLIC3060-2 | 165 | GLIC3060-3 | 230 |



GLIC2436-3



GLIC2448-2

Work Benches

- Made of heavy gauge steel
- Stationary or Mobile
- Top shelf with 1½" retaining wall on 3 sides, front side lip down for easy access
- Lower half shelf is 15" deep with 4" high back
- Heavy duty tubular corner construction
- 22" clearance between shelves
- 2-rigid and 2-swivel/brake 5" polyurethane casters
- Powder gray coat finish
- F.O.B. IL

| Model No. | D x W x H (In.) | Description | Wt. (Lbs.) |
|-----------|-----------------|-------------|------------|
| GSWB3048 | 30 x 48 x 35 | Stationary | 135 |
| GSWB3060 | 30 x 60 x 35 | Stationary | 145 |
| GMWB3048 | 30 x 48 x 35 | Mobile | 140 |
| GMWB3060 | 30 x 60 x 35 | Mobile | 150 |
| GMWB3072 | 30 x 72 x 35 | Mobile | 170 |

*Drawer will be placed in the middle of the bench unless specified. Add a "D" after the model number.



GSWB3060, Stationary Workbench



GSWB3060-D
Stationary Workbench
w/optional drawer



GMWB3060
Mobile Workbench

3-SIDED CARTS

3-Sided Carts

- Bases made of heavy gauge steel
- 1,400 lb. capacity
- Height is 48" above the deck
- Push handle
- Additional shelves available
- 2 swivel and 2 rigid 5" x 2" phenolic casters
- Orange finish
- F.O.B. IL

| Model No. | D x W (In.) | Wt. (Lbs.) |
|---------------|-------------|------------|
| GEX1836TS-ORN | 18 x 36 | 115 |
| GEX2442TS-ORN | 24 x 42 | 130 |
| GEX2448TS-ORN | 24 x 48 | 137 |
| GEX2454TS-ORN | 24 x 54 | 141 |
| GEX2460TS-ORN | 24 x 60 | 147 |
| GEX3042TS-ORN | 30 x 42 | 175 |
| GEX3048TS-ORN | 30 x 48 | 190 |
| GEX3054TS-ORN | 30 x 54 | 205 |
| GEX3060TS-ORN | 30 x 60 | 220 |
| GEX3072TS-ORN | 30 x 72 | 250 |
| GEX3660TS-ORN | 36 x 60 | 250 |
| GEX3672TS-ORN | 36 x 72 | 273 |

Additional Shelves

- Add suffix "2" or "3" after "TS" of model no. to indicate a total of 2 or 3 shelf unit.

Example: GEX1836TS3 = 2 additional shelves or 3 shelves total, including the bottom.



GEX2460TS



GEX1836TS3

Open Portable Shelf Cart

- All welded construction made of 1" square tubing with ½" rods on sides and back
- Heavy gauge steel shelves slope from front to back
- 14" clearance between shelves
- Standard 6" x 2" polyurethane casters (2-swivel, 2-rigid)
- 2,400 lb. capacity.
- 61" overall height
- Red finish.
- F.O.B. IL.

| Model No. | D x W x H (In.) | Wt. (Lbs.) |
|--------------|-----------------|------------|
| GOPT2236-RED | 22 x 36 x 61 | 193 |
| GOPT2278-RED | 22 x 78 x 61 | 342 |
| GOPT2442-RED | 24 x 42 x 61 | 225 |
| GOPT2448-RED | 24 x 48 x 61 | 260 |
| GOPT3048-RED | 30 x 48 x 61 | 260 |
| GOPT3060-RED | 30 x 60 x 61 | 340 |
| GOPT3072-RED | 30 x 72 x 61 | 403 |
| GOPT3672-RED | 36 x 72 x 61 | 458 |



GOPT2448

Double Sided Mesh Stock Truck

- Heavy gauge steel
- Shelves slope toward center
- 8" x 2" polyurethane casters in diamond pattern for maximum maneuverability
- Red finish
- F.O.B. IL.

| Model No. | O.A. Size | Shelf Width (In.) | Wt. (Lbs.) |
|-----------|-----------------|-------------------|------------|
| | D x W x H (In.) | | |
| GDSM2448 | 24 x 48 x 56 | 12 | 250 |
| GDSM3048 | 30 x 48 x 56 | 15 | 290 |
| GDSM3060 | 30 x 60 x 56 | 15 | 310 |



GAS STORAGE

Horizontal Storage Units

- Holds 20, 30, or 40 Lb. cylinders

Gas Cylinder Storage Units

- All welded (SU) or Knocked Down (KD)
- Sides are 13-gauge expanded metal
- 16-gauge solid steel roof
- Corner posts are 12-gauge
- Padlock loop & hinges
- Pre-drilled legs to anchor to floor
- Painted safety yellow with red legend: "Flammable-Keep Away From Flame"
- Meets all OSHA requirements and NFPA standards
- KD Frt Class = 85
- Set-up Frt Class = 175
- F.O.B. IL. = (All)

Vertical Storage Units

- Safety chains
- Holds cylinders up to 200 Lbs.

| All Welded Set-up (SU) Model No. | Knocked Down (KD) Model No. | Cylinders Stored | D x W x H (In.) | Wt. (Lbs.) |
|----------------------------------|-----------------------------|------------------|-----------------|------------|
| Horizontal Storage Unit | | | | |
| GCH4SU | GCH4KD | 4 | 32 x 38 x 37 | 170 |
| GCH8SU | GCH8KD | 8 | 32 x 38 x 70 | 280 |
| GCH12SU | GCH12KD | 12 | 49 x 38 x 70 | 340 |
| GCH16SU | GCH16KD | 16 | 65 x 38 x 70 | 490 |
| Vertical Storage Unit | | | | |
| GCV510SU | GCV510KD | 5-10 | 32 x 38 x 70 | 204 |
| GCV1020SU | GCV1020KD | 10-20 | 65 x 38 x 70 | 360 |



GCV1020SU



GCH8SU

Smooth Steel Deck U Boat

- Heavy duty all steel channel construction
- Removable handles
- 6-wheel design for maximum maneuverability
- 4" Polyurethane swivel casters on ends
- Center casters 8" heavy duty mold-on-rubber
- F.O.B. IL

| Model No. | Deck Size D x W x H (In.) | Capacity | Wt. (Lbs.) |
|---------------|------------------------------|----------|---------------|
| GUBS1660-84PU | 16 x 60 x 60 | 1800 | 102 |
| GUBS2460-84PU | 24 x 60 x 60 | 1800 | 123 |



Smooth Steel Deck U Boat

optional shelf available

Diamond Deck U Boat

- Heavy-Duty all steel construction
- Features one piece galvanized steel diamond plate deck
- Removable handles
- 6-wheel design for maximum maneuverability
- 4" polyurethane swivel casters on ends
- Center casters 8" heavy-duty mold-on rubber
- F.O.B. IL

| Model No. | Deck Size D x W x H (In.) | Capacity | Wt. (Lbs.) |
|----------------|------------------------------|----------|---------------|
| UBDG1660 | 16 x 60 x 60 | 1800 | 102 |
| GUBDG2460-84PU | 24 x 60 x 60 | 1800 | 123 |



Diamond Deck U Boat

Wood Deck U Boat

- Heavy-Duty all steel construction
- Features wood (with protective finish) deck encased in steel
- Removable handles
- 6-wheel design for maximum maneuverability
- 4" polyurethane swivel casters on ends
- Center casters 8" heavy-duty mold-on rubber
- F.O.B. IL

| Model No. | Deck Size D x W x H (In.) | Capacity | Wt. (Lbs.) |
|---------------|------------------------------|----------|---------------|
| GUBW1660-84PU | 16 x 60 x 60 | 2000 | 102 |
| GUBW2460-84PU | 24 x 60 x 60 | 2000 | 123 |



Wood Deck U Boat

PLATFORM TRUCKS

All Steel Platform Truck

- 1,500 lb. Capacity
- Removable handle
- Gray finish
- 2-swivel and 2-rigid casters, rubber
- F.O.B. IL

| Model No. | D x W (In.) | Wt. (Lbs.) |
|------------|-------------|------------|
| GHPT2436-R | 24 x 36 | 80 |
| GHPT2460-R | 24 x 60 | 107 |
| GHPT2848-R | 28 x 48 | 107 |
| GHPT3048-R | 30 x 48 | 112 |
| GHPT3648-R | 36 x 48 | 134 |



GHPT2436-R

Heavy Duty All-Welded Platform Truck

- 2,000 lb. Capacity
- Made of heavy gauge steel
- 2-swivel and 2-rigid 8" x 2" mold-on rubber wheels rated at 500 lbs. per caster
- Gray finish
- F.O.B. IL.

| Model No. | D x W (In.) | Wt. (Lbs.) |
|------------------------|-------------|------------|
| GHDPT2448 [†] | 24 x 48 | 130 |
| GHDPT3060 [†] | 30 x 60 | 150 |



GHDPT2448

Call about our
QUICK SHIP
program

Heavy Duty Red Hand Pallet Truck

- 7½" x 2" Polyurethane wheels with aluminum core dissipate heat for increased wheel life in high use applications
- Adjustable push rods and reinforced forks
- Articulating axle adjusts automatically to ensure load stability over uneven surfaces or small debris
- Powder coated red
- F.O.B. IL
- Frt. Class = 92.5 (6-units crated — with handles not attached)
- Frt. Class = 175 (handle already attached)
- Adjustable push rods and reinforced forks



Heavy Duty Hand Pallet Truck



| Model No. | Fork Size W x L (In.) | Lowered Ht. (In.) | Wheel Size (In.) | Wt. (Lbs.) |
|-------------|--------------------------|----------------------|---------------------|---------------|
| IE2148-55HC | 21 x 48 | 2.9 | 7.5 x 2 | 180 |
| IE2748-55HC | 27 x 48 | 2.9 | 7.5 x 2 | 180 |

Corrosion Resistant Pallet Trucks

Whether it is a clean-room or a cold-room environment or a highly corrosive chemical application, or the unit simply needs to be washed down on a regular basis, the GILLIS Corrosion Resistant Pallet Trucks will do the job.

Galvanized Pallet Truck

- For corrosion resistance as well as cold applications
- Ideal for use in freezers or coolers with temperatures down to -10° Fahrenheit as well as chemical exposure applications
- Hygienic, durable and easy to clean,
- 100% galvanized pump, handle, frame and components, and polyurethane wheels and rollers
- Widely used in meat processing, wineries, etc., and is well-suited for transporting goods in and out of freezers/ coolers.



ISSPT2748

Stainless Steel Pallet Truck

- Features 100% stainless steel pump, handle, frame and component construction, with polyurethane wheels and rollers
- It offers maximum corrosion resistance in chemical, wet or cold applications
- Providing durability, dependability and low maintenance, this unit is perfectly suited for many uses including those of chemical manufacturers, pharmaceutical companies, food manufacturers, and fisheries

| Model No. | Load Capacity W x L (In.) | Lowered Height (In.) | Raised Height (In.) | Overall Fork Width (In.) | Fork Length (In.) | Steer Wheel Size (In.) | Roller Size (In.) | Wt. (Lbs.) |
|-------------------------------------|------------------------------|-------------------------|-------------------------------|-----------------------------|----------------------|---------------------------|----------------------|---------------|
| Galvanized Pallet Truck | | | | | | | | |
| IGSPT2748 | 5500 | 2.9 | 7 ³ / ₄ | 27 | 48 | 7 x 2 | 2.9 x 3.6 | 175 |
| Stainless Steel Pallet Truck | | | | | | | | |
| ISSPT2748 | 5500 | 2.9 | 7 ³ / ₄ | 27 | 48 | 7 x 2 | 2.9 x 3.6 | 175 |

2 & 3-Shelf Utility Carts

Carts come complete with 5" rubber swivel casters.

2 Shelf Utility Carts

| Solid Model No. | Vented Description | Shelf Size W x L | Wt. (Lbs.) |
|-----------------|--------------------|------------------|------------|
| PS1836S33UC-2 | PS1836V33UC-2 | 18 x 36 | 59 |
| PS1848S33UC-2 | PS1848V33UC-2 | 18 x 48 | 69 |
| PS1860S33UC-2 | PS1860V33UC-2 | 18 x 60 | 85 |
| PS2436S33UC-2 | PS2436V33UC-2 | 24 x 36 | 65 |
| PS2448S33UC-2 | PS2448V33UC-2 | 24 x 48 | 77 |
| PS2460S33UC-2 | PS2460V33UC-2 | 24 x 60 | 93 |

3 Shelf Utility Carts

| Solid Model No. | Vented Description | Shelf Size W x L | Wt. (Lbs.) |
|-----------------|--------------------|------------------|------------|
| PS1836S33UC-3 | PS1836V33UC-3 | 18 x 36 | 75 |
| PS1848S33UC-3 | PS1848V33UC-3 | 18 x 48 | 80 |
| PS1860S33UC-3 | PS1860V33UC-3 | 18 x 60 | 114 |
| PS2436S33UC-3 | PS2436V33UC-3 | 24 x 36 | 84 |
| PS2448S33UC-3 | PS2448V33UC-3 | 24 x 48 | 102 |
| PS2460S33UC-3 | PS2460V33UC-3 | 24 x 60 | 126 |



PS1836S33UC-2

4-Shelf Carts

Carts come complete with 5" polyurethane swivel casters.

| Solid Model No. | Vented Model No. | Shelf Size W x L x H (In.) | Wt. (Lbs.) |
|-----------------|------------------|----------------------------|------------|
| PS1836S54C-4 | PS1836V54C-4 | 18 x 36 x 60 | 91 |
| PS1848S54C-4 | PS1848V54C-4 | 18 x 48 x 60 | 111 |
| PS1860S54C-4 | PS1860V54C-4 | 18 x 60 x 60 | 143 |
| PS2436S54C-4 | PS2436V54C-4 | 24 x 36 x 60 | 103 |
| PS2448S54C-4 | PS2448V54C-4 | 24 x 48 x 60 | 127 |
| PS2460S54C-4 | PS2460V54C-4 | 24 x 60 x 60 | 159 |
| PS1836S64C-4 | PS1836V64C-4 | 18 x 36 x 70 | 93 |
| PS1848S64C-4 | PS1848V64C-4 | 18 x 48 x 70 | 113 |
| PS1860S64C-4 | PS1860V64C-4 | 18 x 60 x 70 | 145 |
| PS2436S64C-4 | PS2436V64C-4 | 24 x 36 x 70 | 105 |
| PS2448S64C-4 | PS2448V64C-4 | 24 x 48 x 70 | 129 |
| PS2460S64C-4 | PS2460V64C-4 | 24 x 60 x 70 | 161 |



PS1848S54C-4SL

SECURITY UNITS

Stationary Security Units

- All-welded heavy gauge steel construction
- Expanded metal sides and backs
- Easy locking handle
- Gray finish
- F.O.B. IL.



with doors open



GSSU3048-2

Mobile Security Units

- All-welded heavy gauge steel construction
- Expanded metal sides and backs
- Easy locking handle
- Gray finish
- 5" x 2" phenolic casters
- F.O.B. IL.



GSSU3048-3
With extra shelf



GMSU3048-2
w/optional fork pockets

| Stationary Security Units | | | With Extra Shelf | | Mobile Security Units | | With Extra Shelf | |
|---------------------------|------------|------------|------------------|------------|-----------------------|------------|------------------|------------|
| D x W x H (In.) | Model No. | Wt. (Lbs.) | Model No. | Wt. (Lbs.) | Model No. | Wt. (Lbs.) | Model No. | Wt. (Lbs.) |
| 24 x 60 x 72 | GSSU2460-2 | 315 | GSSU2460-3 | 355 | GMSU2460-2 | 325 | GMSU2460-3 | 365 |
| 30 x 48 x 72 | GSSU3048-2 | 330 | GSSU3048-3 | 370 | GMSU3048-2 | 340 | GMSU3048-3 | 380 |
| 30 x 60 x 72 | GSSU3060-2 | 355 | GSSU3060-3 | 395 | GMSU3060-2 | 365 | GMSU3060-3 | 405 |
| 30 x 72 x 72 | GSSU3072-2 | 370 | GSSU3072-3 | 410 | GMSU3072-2 | 380 | GMSU3072-3 | 420 |
| 36 x 60 x 72 | GSSU3660-2 | 385 | GSSU3660-3 | 425 | GMSU3660-2 | 395 | GMSU3660-3 | 435 |
| 36 x 72 x 72 | GSSU3672-2 | 415 | GSSU3672-3 | 455 | GMSU3672-2 | 425 | GMSU3672-3 | 465 |

All Security Units are Available in:
Gray, Tan, Blue, Yellow, Red, Orange and Green

Mobile Pipe Cart

The mobile pipe cart serves as the perfect portable cart for the storage and transport of long materials. The sturdy all-welded arms create eight separate levels allowing storage and transport of pipe, conduit, steel fabricated parts, or other hard-to-handle items. Arm end stops retain round or unstable items from falling off arms. Shelves are a graduated depth from top to bottom:

- 12", 14", 16", 20".
- 1,000 lbs. capacity
- Tubular in design
- Load levels widen from 12" at the top level to 18" at the base
- Low overall height storage allows a person to reach and lift manually
- Portable - for multiple uses
- Standard (2) 5" swivel and (2) 5" rigid casters supplied
- Ships unassembled for freight savings



Mobile Pipe Cart

| Model No. | Description | L x W x H (In.) | Wt. (Lbs.) |
|------------|-------------|--|--------------------------------|
| MO-559 | Pipe Rack | 50 x 43 x 69 | 172 |
| MO-559-1-4 | Upper Pan | 50 x 11 ¹³ / ₁₆ x 3 ¹ / ₁₆ | 13 |
| MO-559-1-3 | Middle Pan | 50 x 13 ¹³ / ₁₆ x 3 ¹ / ₁₆ | 14 |
| MO-559-1-2 | Lower Pan | 50 x 15 ¹³ / ₁₆ x 3 ¹ / ₁₆ | 15 ¹ / ₂ |
| MO-559-1-1 | Base Pan | 50 x 20 ¹ / ₁₆ x 3 ¹ / ₁₆ | 18 ¹ / ₂ |

Collapsible Nesting Security Cart

Designed to provide simplified, secure transport of valuable goods with less effort and fewer employees, the Collapsible Nesting Security Cart easily carries a wide array of products, regardless of size or shape. A must for transporting valuable inventory such as jewelry or electronics, it delivers significant advantages:

- Reduced staffing needs: loaded carts can be linked together and towed as one coordinated unit utilizing an innovative built-in tow bar, allowing a single employee to easily manage and navigate several carts at once
- Less storage space: empty carts can collapse to 33% of their original size and be nested together for easier transport and a reduced footprint in both trucks and your storage facility

- A patent-pending design: the interior includes a built-in shelf that pivots into position when needed or out of the way to accommodate different products –an SPG exclusive
- Maximum security for your inventory: the unit includes clear view wire security panels with rugged, locking dual doors

Among its many performance features are:

- 6" premium rubber casters for easy navigation
- Synchronized brakes on the rear wheels operated by a single hand brake for greater control
- A generous half-ton capacity, including 500 lbs. per shelf
- Powder-coated in "Machine Red" for a more durable finish



| Model No. | Depth(In.) | Width(In.) | Height(In.) | Wt. (Lbs.) |
|---------------------------------|--------------------------------|--------------------------------|--------------------------------|------------|
| Collapsible Nesting Cart | | | | |
| GNMSU3046-6PR | 30 ¹ / ₂ | 48 ¹ / ₂ | 74 ³ / ₈ | 314 |

Panel & Lumber Cart

This well-engineered cart gives Jarke the edge. This cart is sized for standard lengths of lumber, plywood and other hardware items. The lumber cart promotes self-service in retail businesses.

- 1,200 lbs. capacity
- All-welded steel construction
- Smooth steel deck to prevent product damage
- Choice of wheels
- Painted high visibility orange
- Minor assembly required
- Cart Dimension 26" W x 30" D x 44¾" H
- Other sizes available upon request



| Model No. | Description | Wt. (Lbs.) |
|------------------------------------|--|------------|
| Cart With Caster Assemblies | | |
| UC2630-P1 | Cart w/ 5" Phenolic Wheels: 2 Swivel, 2 Rigid | 88 |
| UC2630-P2 | Cart w/ 5" Phenolic Wheels: 4 Swivel | 88 |
| UC2630-L1 | Cart w/ 5" Polypropylene Wheels: 2 Swivel, 2 Rigid | 88 |
| UC2630-L2 | Cart w/ 5" Polypropylene Wheels: 4 Swivel | 88 |

BOTTLE / CYLINDER CARTS

Bottle/Cylinder Cart and Pallet

A great addition to any plant that stores bottles/cylinders. Easy loading and unloading. "Cam Lock" locking mechanism ensures that divider arms stay securely in place while in transit. Available as a pallet or with casters as a cart.

- Easy manual release without spring pins or clips that can get bent or lost
- "Cam lock" locking mechanism ensures that divider arms stay securely in place while in transit
- Loading and unloading from both sides
- 3 pallet sizes available
- Easy roll-on/roll off of bottles
- Optional locking phenolic roller bearing casters allow pallet placement with easy mobility, 2 rigid and 2 swivel casters
- Painted high visibility orange
- Ships KD (knocked down)

| Model No. | Number Of Cylinders | W x D x H (In.) | Wt. (Lbs.) |
|--|---------------------|-----------------|------------|
| Platform w/ No Casters | | | |
| BCP-4 | 4 | 32 x 25 x 41 | 160 |
| BCP-6 | 6 | 32 x 36 x 41 | 180 |
| BCP-8 | 8 | 32 x 46 x 41 | 215 |
| Platform w/ 5" x 1 1/4" Casters | | | |
| BCP-4C | 4 | 32 x 25 x 41 | 200 |
| BCP-6C | 6 | 32 x 36 x 41 | 235 |
| BCP-8C | 8 | 32 x 46 x 41 | 280 |



Bottle/Cylinder Cart

Low Profile Mobile Cylinder Truck

- Ergonomically designed truck allows easy bottle entry at 1/4" off the ground
- Bottles are held securely by chains with adjustable tear drop chain link lock plates welded securely to frame
- Lower swing away containment bar has a thumb latch release for quick containment of bottles
- 2 truck sizes available
- Painted high visibility orange
- Ships KD (knocked down)

| Model No. | Description | W x D x H (In.) | Wt. (Lbs.) |
|-----------------|-----------------|--------------------|------------|
| MCT-6 | 6 Cylinder Cap. | 24" x 43" x 42 1/2 | 165 |
| MCT-8 | 8 Cylinder Cap. | 32" x 56" x 42 1/2 | 230 |
| Optional | | | |
| TH | Tow Bar | — | 25 |



Low Profile Mobile Cylinder Truck



Manual Lift Truck

The GILLIS IMHLT2200 Manual Hi-Rise Skid Lift Truck is a manually operated high lift truck designed to handle applications such as lifting and transporting skids and bottomless containers, loading and unloading conveyor systems

- Well suited for use as a mobile work station
- Built to work like a Stacker and Pallet Truck combined, the ergonomic design of the IMHLT2200 helps prevent bending and back injuries thereby reducing costly workmen’s compensation claims



IMHLT2200

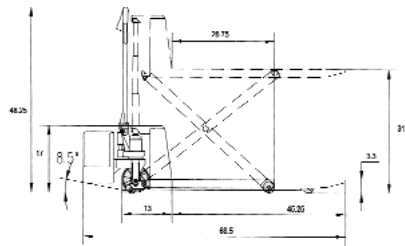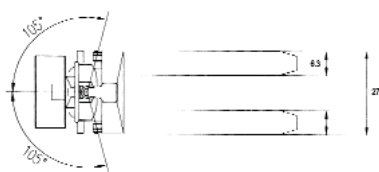

| Model No. | Load Capacity W x L (In.) | Lowered Height (In.) | Raised Height (In.) | Overall Fork Width (In.) | Fork Length (In.) | Fork Width (In.) | Handle Height (In.) | Steer Wheel (In.) | Roller (In.) | Wt. (Lbs.) |
|-----------|------------------------------|-------------------------|------------------------|-----------------------------|----------------------|---------------------|------------------------|----------------------|-----------------|---------------|
| IMHLT2200 | 2200 | 3.3 | 31 1/2 | 27 | 45 | 6.3 | 48 3/4 | 7 1/2 x 2 | 3 x 2 | 375 |

LIFT TABLES

Foot Pump Scissor Lift Tables

- Lift & transport design
- Polyurethane fixed & swivel wheels
- Upper lifting limit bypass
- Dual brake system on each model



IFPST330



Collapsed

| Model No. | Capacity (Lbs.) | Overall Size W x L (In.) | Lowered Height (In.) | Raised Height (In.) | Handle Height (In.) | Wheel (In.) | Table W x L (In.) | Wt. (Lbs.) |
|------------|-----------------|--------------------------|----------------------|---------------------|---------------------|-------------|-------------------|------------|
| IFPST330 | 330 | 17 3/4 x 35 | 8 3/4 | 29 1/2 | 38 | 4 | 17 3/4 x 27 1/2 | 101 |
| IFPST660 | 660 | 19 3/4 x 41 | 11 | 35 1/2 | 39 | 5 | 19 3/4 x 32 | 165 |
| IFPSTD770* | 770 | 19 3/4 x 46 | 11 1/4 | 51 1/2 | 39 | 5 | 19 3/4 x 36 | 265 |
| IFPST1100 | 1100 | 19 3/4 x 41 | 13 1/2 | 35 1/2 | 38 | 5 | 19 3/4 x 32 | 187 |
| IFPST1650 | 1650 | 22 1/2 x 52 | 16 1/2 | 40 | 39 | 6 | 20 x 39 1/4 | 254 |

*Has a double scissor lift to reach the additional raised height.



IFPST660



IFPSTD770



IFPST1100



IFPST1650

Stainless Steel Carts

The carts are functionally designed and engineered to give you remarkably long service life. The carts are available in 300 lb. and 500 lb. load ratings, ideal for most applications.

These Stainless Steel Carts are:

- Easy to clean — Ideally suited for restaurant and foodservice environments
- Environmentally Stable — Unaffected by frequent or rapid changes in temperature or humidity
- Non-Corrosive — Made from high quality stainless steel that will not contaminate or stain transported items

Key Features

- Durable chasis frame
- Protective bumpers on legs and handles
- Rubber swivel casters with unique removable design
- Hemmed shelf edges
- Shelves are resistance welded to legs for added strength
- No set up required

Utility Carts

- Top and middle shelves have a 1" edge on three sides

Guard Rail Cart

- Top and middle shelves have a 2" edge on three sides and guard rail on fourth side
- Bottom shelf has guard rail on four sides



Utility Carts



Guard Rail Carts

Call about our
QUICK SHIP
program

| Model No. | W x L x H (In.) | Shelf (In.) | No. of Shelves | Shelf Clearance (In.) | Capacity (Lbs.) | Caster (In.) | Wt. (Lbs.) |
|-------------------------------------|--|---|----------------|--------------------------------|-----------------|--------------|------------|
| Utility Carts-Medium Duty | | | | | | | |
| LP411* | 16 ³ / ₄ x 27 ¹ / ₄ x 32 ¹ / ₈ | 15 ⁵ / ₈ x 24 ¹ / ₈ | 3 | 12 ¹ / ₄ | 500 | 4 | 25 |
| Guard Rail Carts-Medium Duty | | | | | | | |
| LP526 | 19 ¹ / ₄ x 31 x 34 ³ / ₄ | 18 x 27 ³ / ₈ | 3 | 11 | 500 | 4 | 40 |

*Can ship via UPS

Mail/Record/Chart Carts

File capacity 80–120 legal folders. 2 removable baskets. Adjustable hanging file folder guide rails for use of legal or letter size folders. Non-marking casters. Contents visible from all sides...no lost or hidden items. Light weight...but rugged 7/8" tube construction. Chrome plated...for long lasting durability



LS-2



LS-3



LS-4

| Model No. | Cart Size W x L (In.) | Top Size W x L x H | Baskets Bottom W x L x H (In.) | Casters Front | Casters Back | Wt. (Lbs.) |
|-----------|--------------------------|-----------------------|-----------------------------------|------------------|--------------------|---------------|
| LS-2 | 19 x 27 | 17 x 25 x 11 | 17 x 25 x 7 | 4" Swivel | 4" Rigid | 41 |
| LS-3 | 23 x 30 | 17 x 25 x 11 | 17 x 25 x 7 | 5" Swivel | 10" Semi-Pneumatic | 52 |
| LS-4 | 23 x 41 | 17 x 36 x 11 | 17 x 36 x 7 | 5" Swivel | 10" Semi-Pneumatic | 60 |

HEAVY DUTY SQUARE POST WIRE CARTS

Wire Shelf Carts

- Superbly constructed — 1" square posts offer 27% more steel than round posts
- 17% higher collar than competition for better rigidity
- 2 and 3 shelf utility carts come standard with 5" rubber swivel casters
- 4 shelf carts come standard with 5" polyurethane swivel casters
- Durable plated finish

2 & 3 Shelf Utility Carts - 39" High

| Shelf | 2-Shelf | Wt. | 3-Shelf | Wt. |
|-------------|---------------|--------|---------------|--------|
| W x L (In.) | Model No. | (Lbs.) | Model No. | (Lbs.) |
| 18 x 36 | A1836CP33UC-2 | 49 | A1836CP33UC-3 | 60 |
| 18 x 48 | A1848CP33UC-2 | 57 | A1848CP33UC-3 | 72 |
| 18 x 60 | A1860CP33UC-2 | 63 | A1860CP33UC-3 | 81 |
| 24 x 36 | A2436CP33UC-2 | 54 | A2436CP33UC-3 | 68 |
| 24 x 48 | A2448CP33UC-2 | 64 | A2448CP33UC-3 | 83 |
| 24 x 60 | A2460CP33UC-2 | 73 | A2460CP33UC-3 | 96 |



A1836CP33UC-3

4 Shelf Carts - 60" & 70" High

| Shelf | Overall Ht. | 4-Shelf | Wt. |
|-------------|-------------|--------------|--------|
| W x L (In.) | (In.) | Model No. | (Lbs.) |
| 18 x 36 | 60 | A1836CP54C-4 | 71 |
| 18 x 48 | 60 | A1848CP54C-4 | 87 |
| 18 x 60 | 60 | A1860CP54C-4 | 99 |
| 24 x 36 | 60 | A2436CP54C-4 | 81 |
| 24 x 48 | 60 | A2448CP54C-4 | 101 |
| 24 x 60 | 60 | A2460CP54C-4 | 119 |
| 18 x 36 | 70 | A1836CP64C-4 | 73 |
| 18 x 48 | 70 | A1848CP64C-4 | 89 |
| 18 x 60 | 70 | A1860CP64C-4 | 101 |
| 24 x 36 | 70 | A2436CP64C-4 | 83 |
| 24 x 48 | 70 | A2448CP64C-4 | 103 |
| 24 x 60 | 70 | A2460CP64C-4 | 121 |



A2448CP54C-4

HEAVY DUTY SQUARE POST WIRE CARTS

3-Sided Carts

- Post mounted panels eliminate need for a top shelf
- 4" x 4 1/2" mesh back and side enclosures keep materials from falling during movement. 1200 lb. cart capacity
- Height 70"
- Comes standard with 5" polyurethane swivel casters

| 4-Shelf Model No. | Shelf W x L (In.) | Wt. (Lbs.) |
|----------------------|----------------------|---------------|
| A1836CP64TS-4 | 18 x 36 | 113 |
| A1848CP64TS-4 | 18 x 48 | 134 |
| A1860CP64TS-4 | 18 x 60 | 155 |
| A2436CP64TS-4 | 24 x 36 | 127 |
| A2448CP64TS-4 | 24 x 48 | 152 |
| A2460CP64TS-4 | 24 x 60 | 179 |




A2448CP64TS-4

Security Carts

- Keep valuable materials secured while storing and transporting
- Features 2" x 2" wire mesh on all sides for visibility
- Front door has lockable handle (padlock not included)
- 1200 lb. cart capacity
- Height 70"
- Comes standard with 5" polyurethane swivel casters

| 2-Shelf Model No. | Shelf W x L (In.) | Wt. (Lbs.) |
|----------------------|----------------------|---------------|
| A1830CP64SEC-2 | 18 x 30 | 118 |
| A1848CP64SEC-2 | 18 x 48 | 175 |
| A1860CP64SEC-2 | 18 x 60 | 211 |
| A2430CP64SEC-2 | 24 x 30 | 127 |
| A2448CP64SEC-2 | 24 x 48 | 185 |
| A2460CP64SEC-2 | 24 x 60 | 224 |

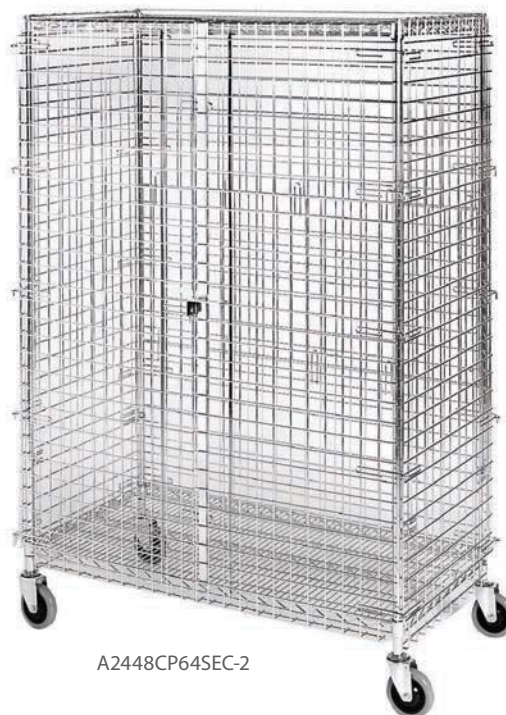

A2448CP64SEC-2

HEAVY DUTY SQUARE POST WIRE CARTS

Bin Cart with Garment Bar

- Finish—Plating Plus
- 12 bins for maximum storage
- Easy to adjust bins to suit your needs
- Overall height 70"

Call for quote.

| | Shelf | Wt. |
|-----------|-------------|--------|
| Model No. | W x L (In.) | (Lbs.) |
| WST1648C | 24 x 48 | 135 |




WST1648C

Heavy Duty Square Post Cart Accessories

Smart-Casters®

Turn standard carts into Smart-Karts. Using Smart-Casters makes your cart a “Smart-Kart” and provides cart users with maneuverability and control. The 4-position, swivel lock casters can be set as swivel or rigid, in any combination, with the touch of a toe. Set of 4 casters - 2 swivel and 2 smart.

| Model No. | Wt. (Lbs.) |
|------------|------------|
| G5PGSL22 | 12 |
| (Set of 4) | |

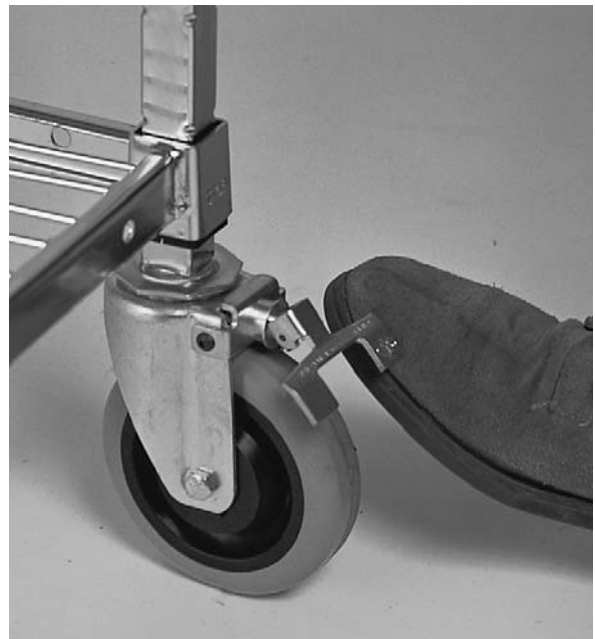

A2448CP64TS-4

STANDARD DUTY ROUND POST WIRE CARTS

2 & 3 Shelf Utility Carts

These units consist of 2 or 3 plated shelves, 1 set of (2) plated handles and (4) Swivel rubber casters for 800 lb. capacity.

2 Shelf Carts

| 5" Rubber Casters | 5" Poly Casters | W x L | Wt. |
|-------------------|-----------------|---------|--------|
| Model No. | Model No. | (In.) | (Lbs.) |
| MA1836C33UC-2R | MA1836C33UC-2P | 18 x 36 | 40 |
| MA1842C33UC-2R | MA1842C33UC-2P | 18 x 42 | 43 |
| MA1848C33UC-2R | MA1848C33UC-2P | 18 x 48 | 47 |
| MA2436C33UC-2R | MA2436C33UC-2P | 24 x 36 | 48 |
| MA2442C33UC-2R | MA2442C33UC-2P | 24 x 42 | 52 |
| MA2448C33UC-2R | MA2448C33UC-2P | 24 x 48 | 54 |
| MA2460C33UC-2R | MA2460C33UC-2P | 24 x 60 | 64 |

3 Shelf Carts

| 5" Rubber Casters | 5" Poly Casters | W x L | Wt. |
|-------------------|-----------------|---------|--------|
| Model No. | Model No. | (In.) | (Lbs.) |
| MA1836C33UC-3R | MA1836C33UC-3P | 18 x 36 | 50 |
| MA1842C33UC-3R | MA1842C33UC-3P | 18 x 42 | 54 |
| MA1848C33UC-3R | MA1848C33UC-3P | 18 x 48 | 57 |
| MA2436C33UC-3R | MA2436C33UC-3P | 24 x 36 | 61 |
| MA2442C33UC-3R | MA2442C33UC-3P | 24 x 42 | 67 |
| MA2448C33UC-3R | MA2448C33UC-3P | 24 x 48 | 70 |
| MA2460C33UC-3R | MA2460C33UC-3P | 24 x 60 | 85 |

4-Shelf Carts with Stem Casters

4-Shelf carts with 54" or 64" plated posts. 800 lb. capacity.

54" Posts - (Overall height 60")

| Rubber Casters | Poly Casters | Size | Wt. |
|----------------|--------------|---------|--------|
| Model No. | Model No. | W x L | (Lbs.) |
| MA1836C54CR-4 | MA1836C54C-4 | 18 x 36 | 62 |
| MA1848C54CR-4 | MA1848C54C-4 | 18 x 48 | 72 |
| MA1860C54CR-4 | MA1860C54C-4 | 18 x 60 | 92 |
| MA1872C54CR-4 | MA1872C54C-4 | 18 x 72 | 104 |
| MA2436C54CR-4 | MA2436C54C-4 | 24 x 36 | 76 |
| MA2448C54CR-4 | MA2448C54C-4 | 24 x 48 | 88 |
| MA2460C54CR-4 | MA2460C54C-4 | 24 x 60 | 108 |
| MA2472C54CR-4 | MA2472C54C-4 | 24 x 72 | 128 |

64" Posts - (Overall height 70")

| Rubber Casters | Poly Casters | Size | Wt. |
|----------------|--------------|---------|--------|
| Model No. | Model No. | W x L | (Lbs.) |
| MA1836C64CR-4 | MA1836C64C-4 | 18 x 36 | 64 |
| MA1848C64CR-4 | MA1848C64C-4 | 18 x 48 | 74 |
| MA1860C64CR-4 | MA1860C64C-4 | 18 x 60 | 94 |
| MA1872C64CR-4 | MA1872C64C-4 | 18 x 72 | 106 |
| MA2436C64CR-4 | MA2436C64C-4 | 24 x 36 | 78 |
| MA2448C64CR-4 | MA2448C64C-4 | 24 x 48 | 90 |
| MA2460C64CR-4 | MA2460C64C-4 | 24 x 60 | 110 |
| MA2472C64CR-4 | MA2472C64C-4 | 24 x 72 | 130 |



MA1836C33UC-2R



MA1836C33UC-3R



MA2448C64C-4

STANDARD DUTY ROUND POST WIRE CARTS

3-Sided Carts

Shelf attached 3 x 3 mesh panels hook over the top shelf channel and into the bottom shelf for easy assembly. Additional slip ties keep panels secure during transit. The 3-sided design keeps materials from falling during movement and the top shelf allows for cart covers to fit snugly. Carts come with (4) 5" polyurethane swivel casters. 1200 lb. cart capacity.

4-Shelf Cart

| Model No. | W x L (In.) | Overall Height (In.) | Wt. (Lbs.) |
|-------------|----------------|-------------------------|---------------|
| MTS336C72-4 | 18 x 36 | 78 | 88 |
| MTS342C72-4 | 18 x 42 | 78 | 93 |
| MTS348C72-4 | 18 x 48 | 78 | 100 |
| MTS372C72-4 | 18 x 72 | 78 | 142 |
| MTS536C72-4 | 24 x 36 | 78 | 106 |
| MTS542C72-4 | 24 x 42 | 78 | 114 |
| MTS548C72-4 | 24 x 48 | 78 | 120 |
| MTS560C72-4 | 24 x 60 | 78 | 145 |
| MTS572C72-4 | 24 x 72 | 78 | 170 |

5-Shelf Cart

| Model No. | W x L (In.) | Overall Height (In.) | Wt. (Lbs.) |
|-------------|----------------|-------------------------|---------------|
| MTS336C72-5 | 18 x 36 | 78 | 98 |
| MTS342C72-5 | 18 x 42 | 78 | 104 |
| MTS348C72-5 | 18 x 48 | 78 | 112 |
| MTS372C72-5 | 18 x 72 | 78 | 162 |
| MTS536C72-5 | 24 x 36 | 78 | 119 |
| MTS542C72-5 | 24 x 42 | 78 | 129 |
| MTS548C72-5 | 24 x 48 | 78 | 136 |
| MTS560C72-5 | 24 x 60 | 78 | 166 |
| MTS572C72-5 | 24 x 72 | 78 | 196 |



MTS548C72-4

To place an order,
contact your dealer today!

Hold everything. We offer you a shelving line that can solve all your storage problems.

Imagine the ideal shelving system. It would have to be strong to support heavy loads. It would have to be versatile, able to adapt to all kinds of applications and workplace environments. It would have to be simple to assemble and require little maintenance. It would have to be durable to withstand the punishment of the workplace. And, it would have to be affordable.

If that's what you're looking for in a shelving system, you'll find it in SPG's industry-leading line-up of proven, reliable shelving solutions.

Here is just a sampling of the advantages we offer:

- Strength — our wire shelving is unquestionably the strongest in its class, with shelves up to 60" rated to support 1,250 lbs. each
- Easy Assembly — our shelving systems offer fast, easy assembly and installation; in fact, some of our shelving systems require no tools for assembly
- Versatility — our modular shelving allows you to create a custom-tailored system that can grow and change as your needs do

- Durability — our shelving systems are available in a variety of finishes to withstand all types of challenging work environments, including cold and wet applications
- Selection — no one brings you a broader selection

Here are just some of the shelving choices we offer:

- Heavy-duty square post wire shelving
- Plasteel® non-corrosive shelving
- Plastic Plus™ shelving
- Standard-duty round post wire shelving
- An array of components, accessories and unique caster options

Expect More...

All of our shelving is NSF approved, and our Plasteel® shelving is USDA approved. In fact, every system we make combines quality and value, versatility and durability. So, put all of your old ideas on the shelf, and take a good look at SPG's broad selection of innovative shelving systems.



4-Shelf Shelving Unit

- Unique square post design uses 27% more steel than typical round posts.
- 17% taller collar provides more strength and greater rigidity.
- Solid 2½" robotic welds provide more stability than the two spot welds used on round post systems
- Use Add-On Unit to continue a straight line of shelving, for right angles or for back to back shelving
- Shelf wires average 50% thicker than other systems, providing greater shelf capacity and strength
- Frame is 12 gauge solid steel
- NSF approved




4-Shelf Starter Units

(includes 4 posts plus 4 shelves)

| Model No. | D x W x H (In.) | Wt. (Lbs.) |
|--------------|-----------------|------------|
| A1836CP72S-4 | 18 x 36 x 72 | 64 |
| A1848CP72S-4 | 18 x 48 x 72 | 80 |
| A1860CP72S-4 | 18 x 60 x 72 | 92 |
| A1872CP72S-4 | 18 x 72 x 72 | 106 |
| A2436CP72S-4 | 24 x 36 x 72 | 74 |
| A2448CP72S-4 | 24 x 48 x 72 | 94 |
| A2460CP72S-4 | 24 x 60 x 72 | 112 |
| A2472CP72S-4 | 24 x 72 x 72 | 128 |

Starter Unit with Add-On Unit

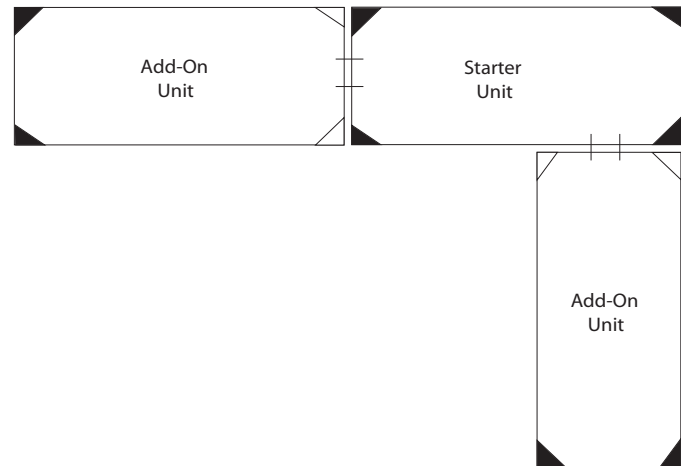

4-Shelf Add-On Units

| Model No. | D x W x H (In.) | Wt. (Lbs.) |
|--------------|-----------------|------------|
| A1836CP72A-4 | 18 x 36 x 72 | 54 |
| A1848CP72A-4 | 18 x 48 x 72 | 70 |
| A1860CP72A-4 | 18 x 60 x 72 | 82 |
| A1872CP72A-4 | 18 x 72 x 72 | 96 |
| A2436CP72A-4 | 24 x 36 x 72 | 64 |
| A2448CP72A-4 | 24 x 48 x 72 | 84 |
| A2460CP72A-4 | 24 x 60 x 72 | 102 |
| A2472CP72A-4 | 24 x 72 x 72 | 118 |

Wire Shelves

Wire shelves with Plating Plus™ finish is ideal for dry environments. Bright plating has lustrous eye appeal and provides years of maintenance-free performance.

| Model No. | Shelf | Wt. |
|-----------|-----------------|--------|
| | W x L (In.) | (Lbs.) |
| A1836CP | 18 1/8 x 35 7/8 | 11 |
| A1842CP | 18 1/8 x 41 7/8 | 13 |
| A1848CP | 18 1/8 x 47 7/8 | 15 |
| A1860CP | 18 1/8 x 59 7/8 | 18 |
| A1872CP | 18 1/8 x 71 7/8 | 21 1/2 |
| A2436CP | 24 1/8 x 35 7/8 | 13 1/2 |
| A2448CP | 24 1/8 x 47 7/8 | 18 1/2 |
| A2460CP | 24 1/8 x 59 7/8 | 23 |
| A2472CP | 24 1/8 x 71 7/8 | 27 |



Posts

Square posts with 27% more surface to support each shelf corner than round posts, provide a clear strength advantage. Easier to assemble and easier to align, square posts make every installation a simple matter. The unique dimpled design and clean appearance, uncluttered by a numbering system, provide definite eye appeal. All posts have Plating Plus™ finish.

For Wire or Plasteel® Units

| Model No. | Post Ht. (In.) | Wt. (Lbs.) |
|-----------|----------------|------------|
| P64CP | 64 | 4 1/2 |
| P72CP | 72 | 5 |
| P84CP | 84 | 5 1/2 |



Stem Casters

Stem casters are available in many different materials, sizes and for many different applications. The most widely used casters are shown below with others available upon request.



Stem Casters

| Swivel Model No. | Rigid/Swivel Model No. | Swivel/Brake Model No. | Wheel Material | Wheel W x D (In.) | Load Cap. (Lbs.) | Wt. (Lbs.) |
|------------------|------------------------|------------------------|----------------|-----------------------------------|------------------|------------|
| CM5M | — | CM5MB | Rubber | 5 x 1 ¹ / ₄ | 280 | 3 |
| CM5P | — | CM5PB | Polyurethane | 5 x 1 ¹ / ₄ | 300 | 3 |
| — | AC8RS | — | Polyurethane | 5 x 1 ¹ / ₄ | 250 | 3 |
| — | AC9RS | — | Polyurethane | 5 x 1 ¹ / ₄ | 250 | 3 |

Treads

Rubber Tread

Combines high load capacity and easy rolling with good floor protection. Recommended for hard floors and carpets.

Polyurethane

Tough, abrasion-resistant. Excellent floor protection and ease of rolling. Widest range of temperature use: -30°F to +180°F.

Smart-Casters®


The Smart-Caster provides cart users with maneuverability and control. The 4-position, swivel lock casters (also referred to as “steering casters”) can be set as swivel or rigid, in any combination, with the touch of a toe for ultimate control.

| Model No. | Description | Wt. (Lbs.) |
|-----------|------------------|------------|
| AC8RS | Smart Caster | 3 |
| G5PGSL22 | 2 Swivel/2 Smart | 12 |



Shelf Side Ledges—6" High

| Plated Model No. | Shelf (In.) | Wt. (Lbs.) |
|------------------|-------------|------------|
| LU18C | 18 | 1.1 |
| LU24C | 24 | 1.5 |

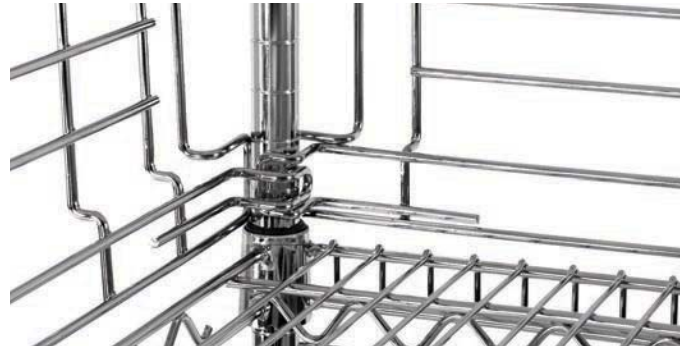


6" Side and Back Shelf Ledges

Shelf Back Ledges—6" High

| Plated Model No. | Shelf (In.) | Wt. (Lbs.) |
|------------------|-------------|------------|
| LU36C | 36 | 2.2 |
| LU48C | 48 | 3.0 |
| LU60C | 60 | 3.7 |
| LU72C | 72 | 4.4 |

Heavyweight Shelf Dividers—7" High

| Plated Model No. | Shelf (In.) | Wt. (Lbs.) |
|------------------|-------------|------------|
| SDU18C | 18 | 1.5 |
| SDU24C | 24 | 2.0 |

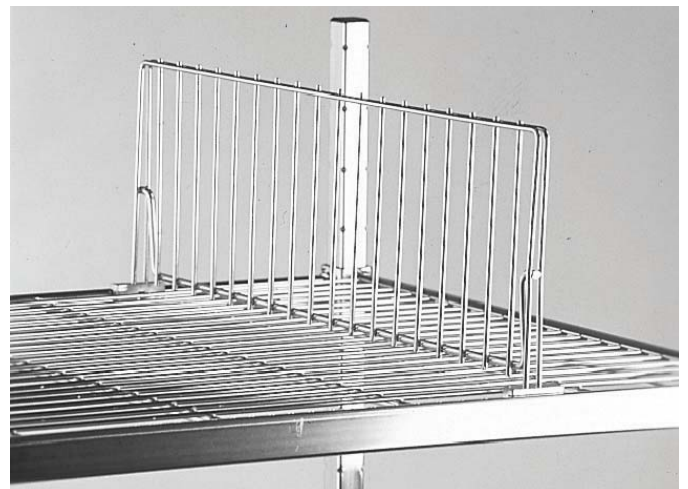

7" Heavyweight Shelf Dividers

Snap-on Shelf Covers

Establish an effortless regular shelving maintenance program with Snap-On Shelf Covers. Covers easily snap onto shelves. Quick, inexpensive and vastly extends the effective life of the shelving. Embossed to provide air circulation.

| | Shelf | Wt. |
|-----------|-------------|--------|
| Model No. | W x L (In.) | (Lbs.) |
| AM1836P | 18 x 36 | 1 1/2 |
| AM1848P | 18 x 48 | 2 |
| AM1860P | 18 x 60 | 2 1/2 |
| AM1872P | 18 x 72 | 2 3/4 |
| AM2436P | 24 x 36 | 2 |
| AM2448P | 24 x 48 | 2 3/4 |
| AM2460P | 24 x 60 | 3 1/2 |
| AM2472P | 24 x 72 | 4 |



Snap-On Shelf Cover

Shelf Covers

All plastic. Retains small items. White.

| | Shelf | Wt. |
|-----------|-------------|--------|
| Model No. | W x L (In.) | (Lbs.) |
| 1836PSG | 18 x 36 | 1 1/2 |
| 1848PSG | 18 x 48 | 2 |
| 1860PSG | 18 x 60 | 2 1/2 |
| 1872PSG | 18 x 72 | 3 |
| 2436PSG | 24 x 36 | 2 |
| 2448PSG | 24 x 48 | 2 3/4 |
| 2460PSG | 24 x 60 | 3 1/2 |
| 2472PSG | 24 x 72 | 4 |



Shelf Cover

Cart Covers

Standard covers: Nylon with velcro openings. Color blue
Options: Staph Chek, Zipper, Other sizes & colors.

| 54" High | 64" High | 72" High | Shelf | Wt. |
|-----------|-----------|-----------|-------------|--------|
| Model No. | Model No. | Model No. | W x L (In.) | (Lbs.) |
| CC184854 | CC184864 | CC184872 | 18 x 48 | 5 |
| CC186054 | CC186064 | CC186072 | 18 x 60 | 6 |
| CC244854 | CC244864 | CC244872 | 24 x 48 | 5 |
| CC246054 | CC246064 | CC246072 | 24 x 60 | 6 |
| CC247254 | CC247264 | CC247272 | 24 x 72 | 7 |




Cart Covers


Shelf Label Holder

All plastic. Two types: Self adhesive gray plastic, Snap-on, clear plastic (only fits Heavyweight Wire Shelving). Both types use label inserts.

| Model No. | Description |
|-----------|--------------------------------------|
| SHLAB | Self Adhesive |
| SHLAB2 | Snap-on (for Heavyweight Shelf only) |
| SHLAB3 | |




SHLAB2



SHLAB

Shelf Label

| Model No. | Description |
|-----------|---------------------------------|
| MARKER2 | Shelf Labels - 3" plastic label |



Shelf Label

Extra Collets

Collets are shipped with all styles of shelves.
Extra collets are available in sets of 4.

Model No.
COLZ



Extra Collets

Plasteel® Non-Corrosive Shelving & Carts — Solid or Vented

- 1,000 pound capacity per shelf— evenly distributed
- Molded high density structural foam polyethylene shelf over 1" square steel tubular frame coated with a hard baked resin
- Square 16 gauge steel post coated with a hard baked resin
- Available in solid or vented shelf
- Shelves have Lifetime Guarantee against rust
- USDA approved


4-Shelf Units - 64" High

| Solid Model No. | Vented Model No. | Shelf W x L (In.) | Wt. (Lbs.) |
|-----------------|------------------|-------------------|------------|
| PS1836S64S-4 | PS1836V64S-4 | 18 x 36 | 82 |
| PS1848S64S-4 | PS1848V64S-4 | 18 x 48 | 102 |
| PS1860S64S-4 | PS1860V64S-4 | 18 x 60 | 134 |
| PS2436S64S-4 | PS2436V64S-4 | 24 x 36 | 94 |
| PS2448S64S-4 | PS2448V64S-4 | 24 x 48 | 118 |
| PS2460S64S-4 | PS2460V64S-4 | 24 x 60 | 150 |




4-Shelf Units - 72" High

| Solid Model No. | Vented Model No. | Shelf W x L (In.) | Wt. (Lbs.) |
|-----------------|------------------|-------------------|------------|
| PS1836S72S-4 | PS1836V72S-4 | 18 x 36 | 84 |
| PS1848S72S-4 | PS1848V72S-4 | 18 x 48 | 104 |
| PS1860S72S-4 | PS1860V72S-4 | 18 x 60 | 136 |
| PS2436S72S-4 | PS2436V72S-4 | 24 x 36 | 96 |
| PS2448S72S-4 | PS2448V72S-4 | 24 x 48 | 120 |
| PS2460S72S-4 | PS2460V72S-4 | 24 x 60 | 152 |

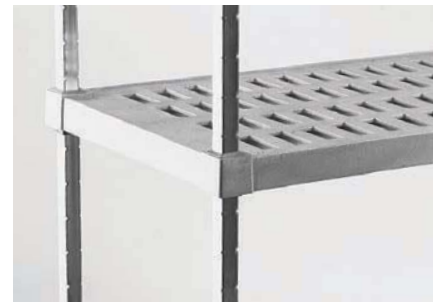

Vented

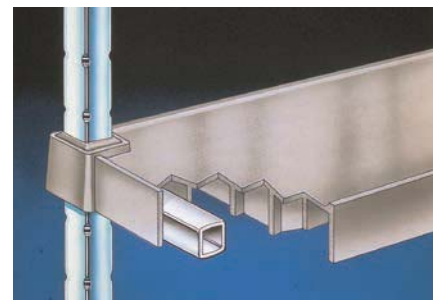


Plasteel® Cutaway

Plasteel® Additional Shelves

Steel reinforced polyethylene foam shelves support 1,000 lbs. each. Available in solid or vented styles. May be intermixed with all other styles of Gillis shelves.

| Solid Model No. | Vented Model No. | Shelf W x L (In.) | Wt. (Lbs.) |
|-----------------|------------------|-------------------|------------|
| PS1836S | PS1836V | 18 x 36 | 16 |
| PS1848S | PS1848V | 18 x 48 | 21 |
| PS1860S | PS1860V | 18 x 60 | 29 |
| PS2436S | PS2436V | 24 x 36 | 19 |
| PS2448S | PS2448V | 24 x 48 | 25 |
| PS2460S | PS2460V | 24 x 60 | 33 |

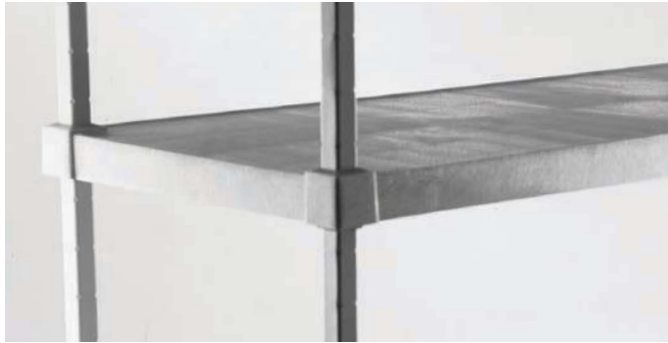

Plasteel® Solid Shelves



Plasteel® Vented Shelves

Plastic Plus™ Shelving

Shelves are rugged polypropylene plastic panels in solid or vented styles snapped onto heavy duty tubular aluminum frames.

- Plastic Panels provide corrosion free surface
- Use anywhere — indoors or out — for dry, wet, warm or cold conditions
- Support weight loads of 800 lbs. per shelf
- Panels snap off for easy cleaning
- Plastic Plus™ starter units include 4 posts plus 4 shelves.

4-Shelf Starter Units — 72" High

| Solid Model No. | Vented Model No. | Shelf W x L (In.) | Wt. (Lbs.) |
|-----------------|------------------|-------------------|------------|
| PP1836S72S-4 | PP1836V72S-4 | 18 x 36 | 33 |
| PP1848S72S-4 | PP1848V72S-4 | 18 x 48 | 41 |
| PP1860S72S-4 | PP1860V72S-4 | 18 x 60 | 48 |
| PP2436S72S-4 | PP2436V72S-4 | 24 x 36 | 38 |
| PP2448S72S-4 | PP2448V72S-4 | 24 x 48 | 46 |
| PP2460S72S-4 | PP2460V72S-4 | 24 x 60 | 54 |



Plastic Plus™ Shelving Unit



Plastic Plus™ Additional Shelves

Shelves are rugged polypropylene plastic panels in solid or vented styles snapped onto heavy duty tubular aluminum frames.

| Solid Model No. | Vented Model No. | Shelf W x L (In.) | Wt. (Lbs.) |
|-----------------|------------------|-------------------|--------------------------------|
| PP1836S | PP1836V | 18 x 36 | 6 ¹ / ₄ |
| PP1848S | PP1848V | 18 x 48 | 8 ¹ / ₄ |
| PP1860S | PP1860V | 18 x 60 | 10 |
| PP2436S | PP2436V | 24 x 36 | 7 ¹ / ₂ |
| PP2448S | PP2448V | 24 x 48 | 9 ¹ / ₂ |
| PP2460S | PP2460V | 24 x 60 | 11 ¹ / ₂ |



Plastic Plus™ Solid Shelves



Plastic Plus™ Vented Shelves

STANDARD DUTY ROUND POST WIRE SHELVING

4-Shelf Shelving Units

Starter units include (4) shelves, (4) posts, (16) plastic collets. 800 pound capacity per shelf evenly distributed.

Add-on units include (4) shelves, (2) posts, (8) collets, shelf supports, (8) S-Hooks.




64" Units

| Model No. | D x W x H (In.) | Wt. (Lbs.) |
|----------------------|-----------------|------------|
| Starter Units | | |
| MA1836C64S-4 | 18 x 36 x 64 | 52 |
| MA1848C64S-4 | 18 x 48 x 64 | 62 |
| MA1860C64S-4 | 18 x 60 x 64 | 82 |
| MA1872C64S-4 | 18 x 72 x 64 | 94 |
| MA2436C64S-4 | 24 x 36 x 64 | 66 |
| MA2448C64S-4 | 24 x 48 x 64 | 78 |
| MA2460C64S-4 | 24 x 60 x 64 | 98 |
| MA2472C64S-4 | 24 x 72 x 64 | 118 |
| Add-On Units | | |
| MA1836C64A-4 | 18 x 36 x 64 | 45 |
| MA1848C64A-4 | 18 x 48 x 64 | 55 |
| MA1860C64A-4 | 18 x 60 x 64 | 75 |
| MA1872C64A-4 | 18 x 72 x 64 | 87 |
| MA2436C64A-4 | 24 x 36 x 64 | 59 |
| MA2448C64A-4 | 24 x 48 x 64 | 71 |
| MA2460C64A-4 | 24 x 60 x 64 | 91 |
| MA2472C64A-4 | 24 x 72 x 64 | 111 |


72" Units

| Model No. | D x W x H (In.) | Wt. (Lbs.) |
|----------------------|-----------------|------------|
| Starter Units | | |
| MA1836C72S-4 | 18 x 36 x 72 | 54 |
| MA1848C72S-4 | 18 x 48 x 72 | 64 |
| MA1860C72S-4 | 18 x 60 x 72 | 84 |
| MA1872C72S-4 | 18 x 72 x 72 | 96 |
| MA2436C72S-4 | 24 x 36 x 72 | 68 |
| MA2448C72S-4 | 24 x 48 x 72 | 80 |
| MA2460C72S-4 | 24 x 60 x 72 | 100 |
| MA2472C72S-4 | 24 x 72 x 72 | 120 |
| Add-On Units | | |
| MA1836C72A-4 | 18 x 36 x 72 | 46 |
| MA1848C72A-4 | 18 x 48 x 72 | 56 |
| MA1860C72A-4 | 18 x 60 x 72 | 76 |
| MA1872C72A-4 | 18 x 72 x 72 | 88 |
| MA2436C72A-4 | 24 x 36 x 72 | 60 |
| MA2448C72A-4 | 24 x 48 x 72 | 72 |
| MA2460C72A-4 | 24 x 60 x 72 | 92 |
| MA2472C72A-4 | 24 x 72 x 72 | 112 |

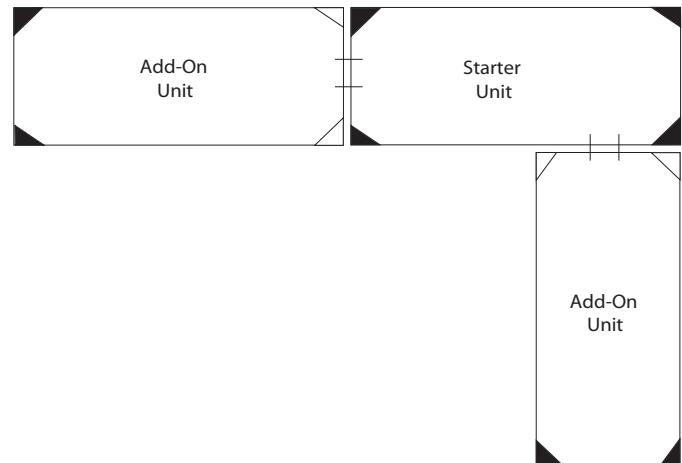

Extra Shelves

| | Shelf | Wt. |
|-----------|-------------|--------|
| Model No. | W x L (In.) | (Lbs.) |
| MA1836C | 18 x 36 | 9½ |
| MA1848C | 18 x 48 | 12 |
| MA1860C | 18 x 60 | 17 |
| MA1872C | 18 x 72 | 20 |
| MA2436C | 24 x 36 | 13 |
| MA2448C | 24 x 48 | 16 |
| MA2460C | 24 x 60 | 21 |
| MA2472C | 24 x 72 | 26 |

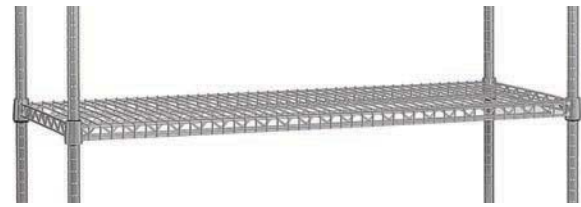

Extra Shelves

Extra Round Posts

Height includes leveling bolt and cap. Post is double notched on 8" centers for easy shelf placement.

| Stationary | | | Mobile | |
|------------|-----------|------------|-----------|------------|
| Ht. (In.) | Model No. | Wt. (Lbs.) | Model No. | Wt. (Lbs.) |
| 54 | MG054C | 3 | MG054NFC | 3 |
| 64 | MG064C | 3½ | MG064NFC | 3½ |
| 72 | MG072C | 4 | MG072NFC | 4 |
| 84 | MG084C | 5 | — | — |



Double Notched Post

S-Hooks

Use in corners or for continuous runs of shelving. Use two clips on each shelf where two posts are not used.

| Model No. |
|-----------|
| MCB1C |




S-Hook


Shelf Label Holder

All plastic. Two types: Self adhesive gray plastic, Snap-on, clear plastic (only fits Heavyweight Wire Shelving). Both types use label inserts.

| Model No. | Description |
|-----------|--------------------------------------|
| SHLAB | Self Adhesive |
| SHLAB2 | Snap-on (for Heavyweight Shelf only) |
| SHLAB3 | |



SHLAB2



SHLAB

STANDARD DUTY ROUND POST WIRE SHELVING ACCESSORIES

Side & Back Ledges

6" High. Packed 2 per carton.

Side Ledges

| Model No. | Length (In.) | Wt. (Lbs.) |
|-----------|--------------|------------|
| LU18C | 18 | 1.1 |
| LU24C | 24 | 1.5 |

Back Ledges

| Model No. | Length (In.) | Wt. (Lbs.) |
|-----------|--------------|------------|
| LU36C | 36 | 2.2 |
| LU48C | 48 | 3.0 |
| LU60C | 60 | 3.7 |
| LU72C | 72 | 4.4 |




6" Side and Back Shelf Ledges

Shelf Dividers

8" high. Packed 2 per carton.

| Model No. | Length (In.) | Wt. (Lbs.) |
|-----------|--------------|------------|
| SDU18C | 18 | 1.5 |
| SDU24C | 24 | 2.0 |

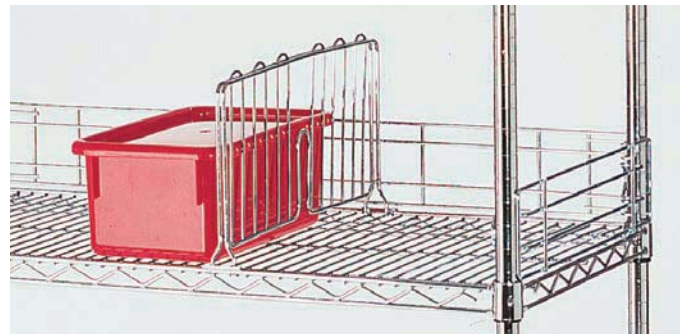

Shelf Divider

Stem Casters (Standard)

| Model No. | Description | | Wheel Dim. (In.) | Capacity (Lbs.) | Wt. (Lbs.) |
|-----------|-------------|--------------|-----------------------------------|-----------------|------------|
| | Type | Tread | | | |
| CM5M | Swivel | Rubber | 5 x 1 ¹ / ₄ | 200 | 3 |
| CM5MB | Brake | Rubber | 5 x 1 ¹ / ₄ | 200 | 3 |
| CM5P | Swivel | Polyurethane | 5 x 1 ¹ / ₄ | 300 | 3 |
| CM5PB | Brake | Polyurethane | 5 x 1 ¹ / ₄ | 300 | 3 |
| CM5PR | Rigid | Polyurethane | 5 x 1 ¹ / ₄ | 300 | 3 |



5" Rubber



5" Poly Swivel

Donut Bumpers

| Model No. | Description |
|-----------|--|
| DB5 | 5" Diameter Revolving |
| DB4 | 3 ¹ / ₂ " Diameter |



5" Brake/Lock



Donut Bumper

Snap-on Shelf Covers

The cleanliness and sanitation idea you've been looking for! An inexpensive, rugged polyethylene plastic shelf cover which quickly and easily attaches to your present shelving. This protective coat provides a barrier against liquids, crumbs and dirt dropping to shelves below. A raised marine edge around the entire perimeter stops liquids from dripping over the side. The raised embossed design promotes air circulation in walk-in refrigerators and freezers, and helps prevent moisture from accumulating on cartons and other solid surfaces. Snap-on Shelf Covers fit wire, embossed, louvered and solid shelves. Snap-on Shelf Covers are acceptable to the U.S. Department of Agriculture for direct food contact and carry the seal of approval of the National Sanitation Foundation. Available in gray.

| 4-Shelf | Shelf | Wt. |
|-----------|-------------|--------|
| Model No. | W x L (In.) | (Lbs.) |
| AM1836P | 18 x 36 | 1½ |
| AM1848P | 18 x 48 | 2 |
| AM1860P | 18 x 60 | 2½ |
| AM1872P | 18 x 72 | 2¾ |
| AM2436P | 24 x 36 | 2 |
| AM2448P | 24 x 48 | 2¾ |
| AM2460P | 24 x 60 | 3½ |
| AM2472P | 24 x 72 | 4 |



Snap-On Shelf Cover

Plastic Shelf Inlays

All plastic opaque white shelf inlays are cut to size and sit flat on the shelf. Great for retaining and storing small items or for use as a dust cover.

| 4-Shelf | Shelf | Wt. |
|-----------|-------------|--------|
| Model No. | W x L (In.) | (Lbs.) |
| 1836PSG | 18 x 36 | 1½ |
| 1848PSG | 18 x 48 | 2 |
| 1860PSG | 18 x 60 | 2½ |
| 1872PSG | 18 x 72 | 3 |
| 2436PSG | 24 x 36 | 2 |
| 2448PSG | 24 x 48 | 2¾ |
| 2460PSG | 24 x 60 | 3½ |
| 2472PSG | 24 x 72 | 4 |



Plastic Shelf Inlays

To place an order,
contact your dealer today!

Make fast work out of work with work tables that offer you more.



Think about all of the abuse your work tables take. Think about all the different things you do on those tables. Think about all the things on your tables and stored beneath them. When you think about it, a lot is resting on the quality and durability of your tables.

That is why SPG offers you a line of work tables designed to withstand the day-in and day-out punishment of the workplace. Tables that are rugged, reliable, and offer you unique features to enhance their value, expand their capabilities, and increase your productivity.

Just consider some of the advantages of SPG stainless steel work tables

- Most feature an all-welded design and are shipped ready to use—no assembly required
- Our tables feature a square edge design for clean abutment to other equipment

- You can choose a 16 gauge or 14 gauge top
- Our standard products can be easily modified to fit your unique needs (consult factory)
- Our tables are available with either galvanized or stainless bases
- You can add an undershelf to increase your storage capacity
- Models are available with a 6" backsplash for unique applications
- All SPG stainless steel tables are NSF certified.

Expect More...

Corrosion and stain resistance. Durability. Versatility. Reliability. Convenience. If you want to get more work done, do it on work tables that do more. SPG stainless steel tables.



16-GAUGE TABLES

16-Gauge Tables — Flat Top with 304 Stainless Steel Base

All units are 304 Stainless Steel (some underparts are galvanized).
KD-Units: Ship knock-down with easy-to-assemble twin point locking legs. Set-Up Units: Ship crated for safe transport, easy uncrating and put-in-place assembly. Note: Weight does not include crate on "Set Up Units".

Set Up Units

| Table | with Shelf | No Shelf | with Shelf | |
|-----------|------------|-------------|------------|------------|
| Model No. | Model No. | W x L (In.) | Wt. (Lbs.) | Wt. (Lbs.) |
| 3SLC-30 | 3SLS-30 | 30 x 36 | 90 | 110 |
| 4SLC-30 | 4SLS-30 | 30 x 48 | 100 | 120 |
| 5SLC-30 | 5SLS-30 | 30 x 60 | 105 | 130 |
| 6SLC-30 | 6SLS-30 | 30 x 72 | 120 | 140 |
| 8SLC-30 | 8SLS-30 | 30 x 96 | 160 | 200 |
| 9SLC-30 | 9SLS-30 | 30 x 108 | 175 | 215 |

For knocked down table use -KD after part#

14-Gauge Tables — Flat Top with 304 Stainless Steel Base

Set Up Units

| Table | with Shelf | No Shelf | with Shelf | |
|-------------|-------------|-------------|------------|------------|
| Model No. | Model No. | W x L (In.) | Wt. (Lbs.) | Wt. (Lbs.) |
| 3-SL-SLC-30 | 3-SL-SLS-30 | 30 x 36 | 105 | 115 |
| 4-SL-SLC-30 | 4-SL-SLS-30 | 30 x 48 | 120 | 120 |
| 5-SL-SLC-30 | 5-SL-SLS-30 | 30 x 60 | 130 | 130 |
| 6-SL-SLC-30 | 6-SL-SLS-30 | 30 x 72 | 140 | 140 |
| 8-SL-SLC-30 | 8-SL-SLS-30 | 30 x 96 | 200 | 200 |
| 9-SL-SLC-30 | 9-SL-SLS-30 | 30 x 108 | 220 | 220 |

For knocked down table use -KD after part#



5SLS-30

16-Gauge Tables with 6" Back Splash and 304 Stainless Steel Base

Set Up Units

| Table | with Shelf | No Shelf | with Shelf |
|-----------|------------|-------------|------------|
| Model No. | Model No. | W x L (In.) | Wt. (Lbs.) |
| 3SLCB-30 | 3SLSB-30 | 30 x 36 | 100 |
| 4SLCB-30 | 4SLSB-30 | 30 x 48 | 115 |
| 5SLCB-30 | 5SLSB-30 | 30 x 60 | 145 |
| 6SLCB-30 | 6SLSB-30 | 30 x 72 | 155 |
| 8SLCB-30 | 8SLSB-30 | 30 x 96 | 185 |
| 9SLCB-30 | 9SLSB-30 | 30 x 108 | 200 |


For knocked down table use -KD after part#

14-Gauge Tables with 6" Back Splash and 304 Stainless Steel Base

Set Up Units

| Table | with Shelf | No Shelf | with Shelf |
|--------------|--------------|-------------|------------|
| Model No. | Model No. | W x L (In.) | Wt. (Lbs.) |
| 3-SL-SLCB-30 | 3-SL-SLSB-30 | 30 x 36 | 100 |
| 4-SL-SLCB-30 | 4-SL-SLSB-30 | 30 x 48 | 115 |
| 5-SL-SLCB-30 | 5-SL-SLSB-30 | 30 x 60 | 145 |
| 6-SL-SLCB-30 | 6-SL-SLSB-30 | 30 x 72 | 155 |
| 8-SL-SLCB-30 | 8-SL-SLSB-30 | 30 x 96 | 185 |
| 9-SL-SLCB-30 | 9-SL-SLSB-30 | 30 x 108 | 200 |

For knocked down table use -KD after part#

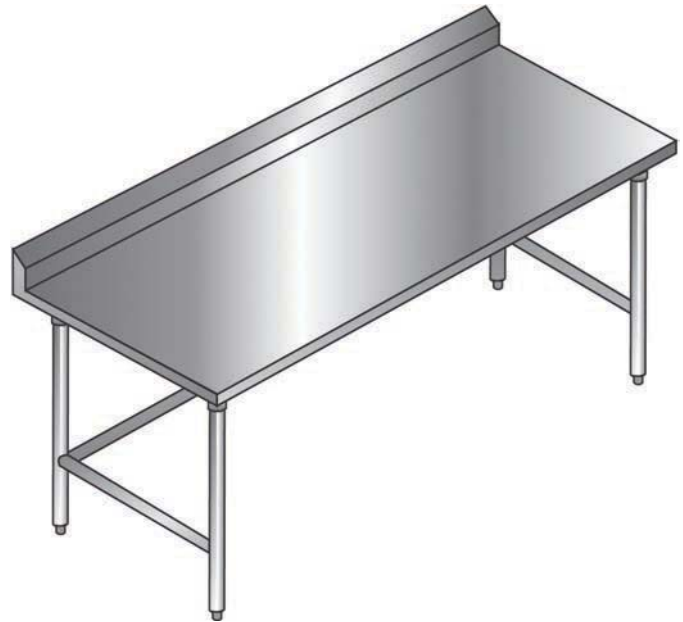

3-SL-SLCB-30

16-GAUGE TABLES


16-Gauge Flat Top Tables with Galvanized Base

All units have 304 Stainless Steel Tops.

Set Up Units

| Table | | with Shelf | No Shelf | with Shelf |
|-----------|-----------|-------------|------------|------------|
| Model No. | Model No. | W x L (In.) | Wt. (Lbs.) | Wt. (Lbs.) |
| 3GLC-30 | 3GLS-30 | 30 x 36 | 90 | 105 |
| 4GLC-30 | 4GLS-30 | 30 x 48 | 100 | 120 |
| 5GLC-30 | 5GLS-30 | 30 x 60 | 105 | 130 |
| 6GLC-30 | 6GLS-30 | 30 x 72 | 120 | 140 |

For knocked down table use -KD after part#

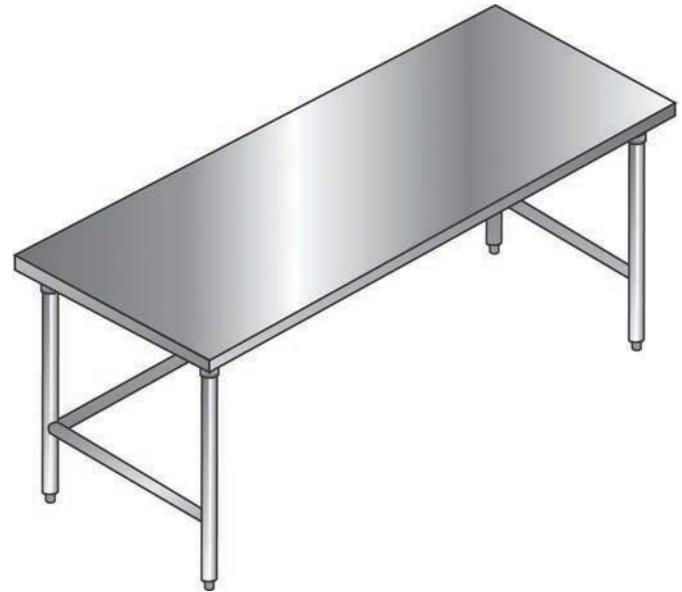

5GLC-30



5GLS-30

To place an order,
contact your dealer today!

Warranty & Product Suitability

Statement

SPG has made a continuous commitment to quality and service. The content of this catalog reflects the years of experience we have in storage technology. All products shown have practical application potential that will increase your storage and handling of virtually any product.

If none of our standard racks or material handling equipment will solve your unique problem, SPG engineers will study your needs and design a variation to these standards or special equipment to meet your specific requirements. The system we recommend will minimize handling and promote flow through your facility. Behind all the factors considered in design and testing, we have but one simple goal: to make products for people and products pursuant to guidelines established by ANSI (American National Standard Institute), UBC (Uniform Building Code) and RMI (Rack Manufacturers Institute).

Product Suitability

Many states and localities have individual codes and regulations governing sales, construction, installation, and/or use of products for certain purposes, which may vary from those in neighboring areas. SPG cannot guarantee compliance, and can not be responsible for how the product is installed or used. Before purchase and use of a product, please review the product application, and the national and local codes and regulations. Be sure that the product, installation and use will comply with them.

Warranty / Limited Liability

The SPG products are fully warranted for one year against defects in design, material and workmanship under normal use except for collision, overloading or improper installation. All products must be installed in accordance with written instructions provided by SPG. Your exclusive remedy and our only liability arising out of any sale shall be the replacement or repair of the goods or refund of the purchase price paid by the buyer, whichever such remedy we select. Any replacement, repair or return must have written authorization before any action is taken. If we elect to repay the purchase price, a written authorization will be issued and the goods must be returned immediately. Any exception to this policy must be agreed to in writing by an officer of SPG.

Terms & Conditions

Terms & Credit

NET 30 days. All prices are F.O.B. Factory. All purchases are subject to a credit review. Credit review may delay production and/or shipping schedules.

Freight and Routing

All shipments are F.O.B. factory. When a carrier has not been specified, we will route shipment in the best way. With prepaid third party shipments, the third party's discount will apply. Customer pick-ups must be made within three days of notification of completion.

Returns

It is the responsibility of the consignee or his representative to check shipments against the bill of lading or packing list. If damaged or short, indicate on the delivery receipt the extent of the shortage or damage. A claim for damage or shortage cannot be processed if the delivery receipt is signed without exception. Stock product can be returned within 30 days when authorized in writing by SPG products and return freight charges are prepaid. There will be a 25% restocking charge. Made-to order and used products cannot be returned.

Cancellation

SPG reserves the right to apply reasonable charges for material and labor performed prior to the cancellation of any order. A formal acknowledgement of these charges will be sent by SPG after notice of cancellation is received.

Minimum Order Quantity

Stock items can be ordered in any quantity, \$25 minimum. Orders for made-to-order items in quantities less than the minimum quantity shown in this price list will be subject to an additional set-up charge based on type of equipment. Call factory for setup charges.

Delivery

Stock items can usually be shipped within 2 weeks. Delivery of made-to-order and non-stock items will be scheduled based on receipt of order and/or approved drawings, when applicable.

To place an order,
contact your dealer today!



EXPECT MORE



STORAGE PRODUCTS GROUP

SPG International, LLC
11230 Harland Drive NE
Covington, GA 30014
877-503-4SPG (4774)

Gillis/Jarke Manufacturing
800-225-5424

www.spgusa.com