


Our innovative grocery store solutions are designed to increase storage capacity, improve access to inventory, move products more efficiently, boost employee productivity, and bring greater profitability to every department in your store. Nobody offers you a wider array of solutions.

e. customerservice@spgusa.com p. 877.503.4SPG (4774) w. spgusa.com





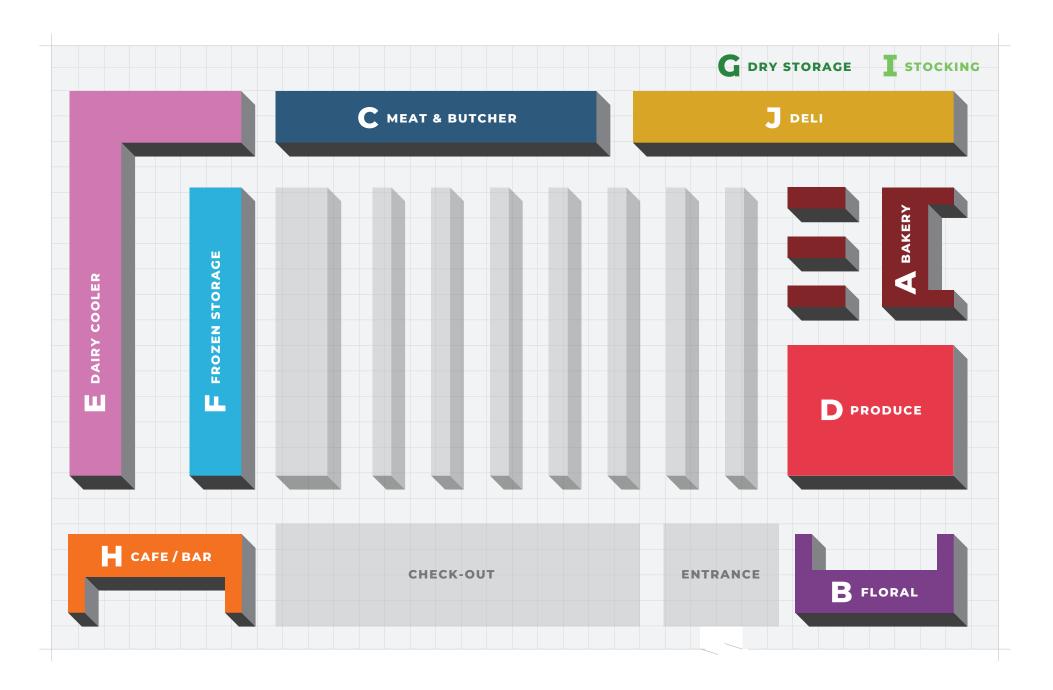







A BAKERY

DAIRY COOLER

STOCKING

B FLORAL

FROZEN STORAGE

DELI

MEAT & BUTCHER

G DRY STORAGE

MORE FROM SPG

PRODUCE

H CAFE/BAR





A BAKERY



POSTS		SHELVES		
	MODEL#	DIMENSIONS	MODEL#	DIMENSIO
	P72	72"	A2436	24 x 3
	PC72	72"	A2448	24 x 4
			A2460	24 x 6

AMCO® WIRE SHELVING

- Unique square post design uses 27% more steel for greater strength and durability than typical round post systems
- Frame is 12-ga. solid steel
- Solid 2-1/8" robotic welds provide more stability than the two spot welds used on round post systems
- Shelves come in 5 widths and 8 lengths
- Shelves up to 48" long support up to 1,000 lbs. (450 kg)
- Shelves are available in wire (standard, extra-wide, slanted and inverted with ledge) — plus heavy-duty, 18-ga. solid stainless steel, and plastic (Plasteel® and Plastic Plus®)
- Assembly is fast and easy
- Shelves have solid edges instead of truss edges, making them easier to clean and label
- Other models available



POSTS		SHE	ELVES
MODEL#	DIMENSIONS	MODEL#	DIMENSIONS
P74	74"	2436	24 x 36
		2448	24 x 48
		2460	24 x 60

ISS® WIRE SHELVING

- Durable round post system is interchangeable with other manufacturers' shelving products
- Ideal for most any environment
- Shelves up to 60" long are rated to support 1,250 lbs. of uniformly distributed static weight
- Shelves feature extra trusses for a higher load rating, less deflection and the ability to use longer shelves
- Posts are numbered on 1" increments to speed assembly and ensure more precise shelf alignment
- Our one-piece hinged Sure-Lock™ coupler makes assembly easy and improves stability
- Shelves are available in wire, dunnage, Series 300 solid stainless steel and plastic
- Marine waterfall shelf edge allows easy loading and unloading
- Other models available



MODEL#	DIMENSIONS
IC2436KITCG	24 x 36 x 72
IC2448KITCG	24 x 48 x 72
IC2460KITCG	24 x 60 x 72

ISS CONTENDER® WIRE SHELVING

- ISS Contender™ round post shelving is a strong, economical solution for both dry and refrigerated storage needs
- Available with Plating Plus[™] finish for display and dry environments — or Contender Grey TM Epoxy finish which is warranted for seven years against naturally occurring corrosion in high-moisture, high-humidity environments
- Each 48" shelf is rated to support up to 800 lbs. (363 kgs) of uniformly distributed static load weight — longer shelves can support up to 600 lbs. (272 kgs)
- Assembles in minutes without tools or hardware
- Shelves are installed on the posts in 1" (25mm) increments and can be changed easily as storage needs change



PC	STS	SHE	LVES
MODEL#	DIMENSIONS	MODEL#	DIMENSIONS
P74	74"	LPS2436	24 x 36
		LPS2448	24 x 48
		LPS2460	24 x 60

- Corrosion free shelves heavy-duty epoxy coated steel frames and grey polypropylene plastic removable panels
- Antimicrobial agent protects the shelf finishes from bacteria, mold, mildew and fungi that cause odors, stains and product degeneration — keeping shelving cleaner in between cleanings*
- Available in solid and vented styles
- Sectional panels are easy to remove and clean
- Shelves can be used with ISS[™] posts and shelving components — stainless steel posts recommended
- No tools or hardware required000 lbs. (455kgs) per shelf of uniformly distributed static weight

53F2G™





MODEL#

KELMAX® ALUMINUM Z-RACKS

- Z-Racks have reinforced gussets for greater strength

Grocery Solutions

- Heavy-duty runners welded to uprights
- Holds 20 bun trays
- Keeps product fresher by allowing food to thaw properly
- Nesting reduces storage footprint by up to 50%
- Lifetime guarantee against rust
- Units have standard 5" polyurethane casters



WITH BACKSPLASH		NO BACKSPLASH	
MODEL#	DIMENSIONS	MODEL#	DIMENSIONS
4SLCB-30	30 x 48 x 36	4SLC-30	30 x 48 x 36
5SLCB-30	30 x 60 x 36	5SLC-30	30 x 60 x 36
6SLCB-30	30 x 72 x 36	6SLC-30	30 x 72 x 36

UNIVERSAL® STAINLESS PREP TABLES

- Standard N Series: 16-gauge 304 Series stainless steel top
- Square edge design for clean abutment to other equipment
- Legs: 1-5/8" O.D. 16-gauge stainless steel with adjustable bullet feet and stainless steel gussets
- Crossrails: 1-5/8" O.D. 16-gauge stainless steel notched to fit legs and fully welded
- Undershelves: 18-gauge 304 Series stainless steel with corners notched to fit legs and fully welded
- Standard working height is 36"
- All tables 84" and longer come standard with 6 legs
- Ships welded and set up no assembly required
- Contact a Sales Representative for undershelf options



KELMAX® ALUMINUM FIXED SHELVING

- Aluminum construction offers higher load ratings so larger loads can be supported across a longer span of shelving
- Aluminum shelving is ideal in hot or caustic applications that might damage the coating of wire shelving
- Kelmax shelving is warranted to be free from manufacturing defects for five years
- All welded aluminum shelving ships set up
- Overall height is 60" for 2 and 3-shelf units and 72" for 4-shelf unit
- Mitered top for extra strength
- Clearance between shelves:
- · Two-shelf unit: 48.5"
- · Three-shelf unit: 22.5"
- · Four-shelf unit: 18.5"
- Choose from 3 types of shelves



MODEL#	DIMENSIONS
4H1580	35 x 25 x 71

KELMAX® FULL SIZE CAN RACKS

- Organize your stock room with the 4H1580 unit
- Ships set up, ready to use
- Holds 162 cans
- All welded aluminum construction will never rust
- Mobile kit available factory installed for safety
- 5" poly U plate casters, 2 swivel w/brakes and 2 rigid



FLORAL



COMPARTMENT SINKS W/ 2 DRAINBOARDS

MODEL#	BOWL DIMENSIONS	# OF BOWLS
3N1824-2D18	18 x 24	3
3N1824-2D24	18 x 24	3
DI-1-10	18 x 24	1

UNIVERSAL® STAINLESS COMPARTMENT SINKS

- Fully fabricated bowl with full metal thickness throughout for greater strength than competitors' drawn bowls
- 9" high integrally formed backsplash
- 2 -1/2" high, 180° sanitary rolled rim at all free edges
- Leg assemblies are located directly under sink bowls for greater load support
- Legs are 1-5/8" diameter tubing with adjustable bullet feet
- Comes with basket drains and 1-1/8" faucet holes punched in backsplash on 8" centers as required
- Fabricated with 16 GA 304 Series Stainless Steel
- 1, 2, and 3 Compartment Sinks, with 1, 2, or no Drainboards available in several sizes - Contact Sales Rep
- NSF listed and CSA certified



WITH BACKSPLASH		NO BACKSPLASH	
MODEL#	DIMENSIONS	MODEL#	DIMENSIONS
4SLCB-30	30 x 48 x 36	4SLC-30	30 x 48 x 36
5SLCB-30	30 x 60 x 36	5SLC-30	30 x 60 x 36
6SI CB-30	30 v 72 v 36	6SI C-30	30 v 72 v 36

UNIVERSAL® STAINLESS PREP TABLES

- Standard N Series: 16-gauge 304 Series stainless steel top
- Square edge design for clean abutment to other equipment
- Legs: 1-5/8" O.D. 16-gauge stainless steel with adjustable bullet feet and stainless steel gussets
- Crossrails: 1-5/8" O.D. 16-gauge stainless steel notched to fit legs and fully welded
- Undershelves: 18-gauge 304 Series stainless steel with corners notched to fit legs and fully welded
- Standard working height is 36"
- All tables 84" and longer come standard with 6 legs
- Ships welded and set up no assembly required
- Contact a Sales Representative for undershelf options



MODEL # DIMENSIONS EHS-1-RL 12 x 10 x 6 EHS-1 12 x 10 x 6

UNIVERSAL® STAINLESS HAND SINKS

- Choose from Standard Series 18-ga. embossed deck with fully welded bowl or robust Spec Series with 16-ga. fully formed and welded deck and bowl.
- 12" x 10" x 6" (305 x 254 x 152) bowl size
- 7" high integrally formed backsplash
- Inverted "V" non-drip edge on three sides
- Includes faucets, basket drains, and wall brackets
- Available with side splashes and electronic eye option- Contact Sales Rep



PC	STS	SHE	LVES
MODEL#	DIMENSIONS	MODEL#	DIMENSIONS
P74	74"	LPS2436	24 x 36
		LPS2448	24 x 48
		LPS2460	24 x 60

- Corrosion free shelves heavy-duty epoxy coated steel frames and grey polypropylene plastic removable panels
- Antimicrobial agent protects the shelf finishes from bacteria, mold, mildew and fungi that cause odors, stains and product degeneration — keeping shelving cleaner in between cleanings*
- Available in solid and vented styles
- Sectional panels are easy to remove and clean
- Shelves can be used with ISS[™] posts and shelving components — stainless steel posts recommended
- No tools or hardware required000 lbs. (455kgs) per shelf of uniformly distributed static weight

Grocery Solutions



MEAT & BUTCHER



MODEL#	DIMENSIONS
4MCT-30	30 x 48 x 36
5MCT-30	30 x 60 x 36
6MCT-30	30 x 72 x 36

UNIVERSAL® STAINLESS POLY-TOP TABLES

- Choose from Standard Series 18-ga. embossed deck with fully welded bowl or robust Spec Series with 16-ga. fully formed and welded deck and bowl.
- 12" x 10" x 6" (305 x 254 x 152) bowl size
- 7" high integrally formed backsplash
- Inverted "V" non-drip edge on three sides
- Includes faucets, basket drains, and wall brackets
- Available with side splashes and electronic eye option- Contact Sales Rep



KNOCKDOWN WELDED MODEL#

4H1144

MODEL# 4H0963

KELMAX® ALUMINUM STANDARD DUTY PAN RACKS

- Round tops and reinforced gussets for greater strength
- Runners welded to uprights
- Holds both 18" x 26" sheet pans and 14" x 18" trays
- Units have standard 5" polyurethane casters
- Lifetime guarantee against rust
- 20 Tray Capacity



COMPARTMENT SINKS W/ 2 DPAINBOARDS

MODEL#	BOWL DIMENSIONS	# OF BOWLS
3N1824-2D18	18 x 24	3
3N1824-2D24	18 x 24	3
DI-1-10	18 x 24	1

UNIVERSAL® STAINLESS COMPARTMENT SINKS

- Fully fabricated bowl with full metal thickness throughout for greater strength than competitors' drawn bowls
- 9" high integrally formed backsplash
- 2 -1/2" high, 180° sanitary rolled rim at all free edges
- Leg assemblies are located directly under sink bowls for greater load support
- Legs are 1-5/8" diameter tubing with adjustable bullet feet
- Comes with basket drains and 1-1/8" faucet holes punched in backsplash on 8" centers as required
- Fabricated with 16 GA 304 Series Stainless Steel
- 1, 2, and 3 Compartment Sinks, with 1, 2, or no Drainboards available in several sizes - Contact Sales Rep
- NSF listed and CSA certified



DIMENSIONS 4H0694 26 x 19 x 69

KELMAX® ALUMINUM LUG CARTS

- All welded construction
- 5" polyurethane swivel stem casters
- 6 Lug Capacity

PRODUCE



48 x 36

4K4751

PSR/EURO TABLE



MODEL#	DIMENSIONS
400172	20 x 44

KELMAX® GALVANIZED STEEL STOCKING CART

- Versatile 2-tier high-capacity design
- Heavy duty galvanized solid top shelf (22" x 44")
- Galvanized square tube bottom shelf
- 5" polyurethane plate casters; 2 swivel and 2 rigid



ISS® PLASTIC DUNNAGE RACKS

- Lightweight one-piece seamless polyethylene
- Rust and corrosion-proof
- Slotted to provide excellent air circulation
- Use in dry storage or in walk-in coolers/freezers
- Guaranteed for up to 10 years
- Holds up to 2,000 lbs. (907 kg.)
- Fits flush to adjacent units to maximize space utilization

MODEL#	DIMENSIONS
DUN2436	24 x 36 x 12
DUN2448	24 x 48 x 12
DUN2460	24 x 60 x 12

3573™

DAIRY COOLER



FREESTYLE® CANTILEVER SHELVING

Grocery Solutions

- Each shelf has a load-bearing capacity of 600 lbs. with a unit rating of 1,800 lbs. for cantilevered shelves and 1,000 lbs. capacity on the bottom shelf — for a total unit capacity of 2,800 lbs.
- No front uprights so it offers greater accessibility
- Increases sq. ft. and cubic volume storage capacity in existing footprint
- Adjustable shelves on 2" increments for maximum flexibility no tools required
- Unit is fully expandable side-to-side with Add-On unit using common uprights with dual-side adjustment
- Durable heavy-duty steel construction

STARTER UNITS		ADD-ON	UNITS
MODEL#	DIMENSIONS	MODEL#	DIMENSIONS
FSMS742436E	24 x 36 x 74	FSMA742436E	24 x 36 x 74
FSMS742448E	24 x 48 x 74	FSMA742448E	24 x 48 x 74
FSMS742460E	24 x 60 x 74	FSMA742460E	24 x 60 x 74

- Shelves, uprights, and frame kits have a durable grey epoxybased finish with advanced antimicrobial protective agent
- Complete assortment of accessories including hanger rails and shelf covers in wire and stainless steel



PC	STS	SHE	LVES
	DIMENSIONS		DIMENSIONS
P74	74"	2436	24 x 36
		2448	24 x 48
		2460	24 x 60

ISS® WIRE SHELVING

- Durable round post system is interchangeable with other manufacturers' shelving products
- Ideal for most any environment
- Shelves up to 60" long are rated to support 1,250 lbs. of uniformly distributed static weight
- Shelves feature extra trusses for a higher load rating, less deflection and the ability to use longer shelves
- Posts are numbered on 1" increments to speed assembly and ensure more precise shelf alignment
- Our one-piece hinged Sure-Lock™ coupler makes assembly easy and improves stability
- Shelves are available in wire, dunnage, Series 300 solid stainless steel and plastic
- Marine waterfall shelf edge allows easy loading and unloading
- Other models available



MODEL# DIMENSIONS IC2436KITCG 24 x 36 x 72 IC2448KITCG 24 x 48 x 72 IC2466KITCG 24 x 60 x 72

ISS CONTENDER® WIRE SHELVING

- ISS Contender™ round post shelving is a strong, economical solution for both dry and refrigerated storage needs
- Available with Plating Plus[™] finish for display and dry environments — or Contender Grey TM Epoxy finish which is warranted for seven years against naturally occurring corrosion in high-moisture, high-humidity environments
- Each 48" shelf is rated to support up to 800 lbs. (363 kgs) of uniformly distributed static load weight — longer shelves can support up to 600 lbs. (272 kgs)
- Assembles in minutes without tools or hardware
- Shelves are installed on the posts in 1" (25mm) increments and can be changed easily as storage needs change



PC	STS	SHELVES
MODEL#	DIMENSIONS	MODEL# DIMENSIONS
P74	74"	LPS2436 24 x 36
		LPS2448 24 x 48
		LPS2460 24 x 60

- Corrosion free shelves heavy-duty epoxy coated steel frames and grey polypropylene plastic removable panels
- Antimicrobial agent protects the shelf finishes from bacteria, mold, mildew and fungi that cause odors, stains and product degeneration — keeping shelving cleaner in between cleanings*
- Available in solid and vented styles
- Sectional panels are easy to remove and clean
- Shelves can be used with ISS™ posts and shelving components — stainless steel posts recommended
- No tools or hardware required000 lbs. (455kgs) per shelf of uniformly distributed static weight







ISS® PLASTIC DUNNAGE RACKS

- Tubular base dunnage shelf is standard, and easily removed without the use of tools for cleaning
- Up to 5 additional shelf positions shelves can be added or removed without tools
- Available in 24" shelf depth
- Clearance between adjustable shelves is 10"
- Maximum load capacity per shelving unit is 2,800 lbs
- Frames and adjustable shelves sold separately



4H1755	24 x 36 x 12
4H1814	24 x 48 x 12
4H1855	24 x 60 x 12

KELMAX® STANDARD TUBULAR DUNNAGE RACKS

- Square Tubular Dunnage Racks are an economical way to hold medium to heavy-duty boxes
- All units come with a lifetime guarantee against rust
- Extra-strong 1-1/2" square aluminum tubing
- Plastic cap feet
- 12" legs



MODEL # DIMENSIONS DUN2436 24 x 36 x 12 DUN2448 24 x 48 x 12 DUN2460 24 x 60 x 12

ISS® PLASTIC DUNNAGE RACKS

- Lightweight one-piece seamless polyethylene
- Rust and corrosion-proof
- Slotted to provide excellent air circulation
- Use in dry storage or in walk-in coolers/freezers
- Guaranteed for up to 10 years
- Holds up to 2,000 lbs. (907 kg.)
- Fits flush to adjacent units to maximize space utilization





FROZEN STORAGE



FREESTYLE® CANTILEVER SHELVING

- Each shelf has a load-bearing capacity of 600 lbs. with a unit rating of 1,800 lbs. for cantilevered shelves and 1,000 lbs. capacity on the bottom shelf — for a total unit capacity of 2,800 lbs.
- No front uprights so it offers greater accessibility
- Increases sq. ft. and cubic volume storage capacity in existing footprint
- Adjustable shelves on 2" increments for maximum flexibility no tools required
- Unit is fully expandable side-to-side with Add-On unit using common uprights with dual-side adjustment
- Durable heavy-duty steel construction

STARTER UNITS		ADD-ON	UNITS	
MODEL#	DIMENSIONS			DIMENSIONS
FSMS742436E	24 x 36 x 74		FSMA742436E	24 x 36 x 74
FSMS742448E	24 x 48 x 74		FSMA742448E	24 x 48 x 74
FSMS742460E	24 x 60 x 74		FSMA742460E	24 x 60 x 74

- Shelves, uprights, and frame kits have a durable grey epoxybased finish with advanced antimicrobial protective agent
- Complete assortment of accessories including hanger rails and shelf covers in wire and stainless steel



PC	STS	SHE	LVES
MODEL#	DIMENSIONS		DIMENSIONS
P74	74"	2436	24 x 36
		2448	24 x 48
		2460	24 x 60

ISS® WIRE SHELVING

- Durable round post system is interchangeable with other manufacturers' shelving products
- Ideal for most any environment
- Shelves up to 60" long are rated to support 1,250 lbs. of uniformly distributed static weight
- Shelves feature extra trusses for a higher load rating, less deflection and the ability to use longer shelves
- Posts are numbered on 1" increments to speed assembly and ensure more precise shelf alignment
- Our one-piece hinged Sure-Lock™ coupler makes assembly easy and improves stability
- Shelves are available in wire, dunnage, Series 300 solid stainless steel and plastic
- Marine waterfall shelf edge allows easy loading and unloading
- Other models available



MODEL # DIMENSIONS IC2436KITCG 24 x 36 x 72 IC2448KITCG 24 x 48 x 72 IC246DKITCG 24 x 60 x 72

ISS CONTENDER® WIRE SHELVING

- ISS Contender™ round post shelving is a strong, economical solution for both dry and refrigerated storage needs
- Available with Plating Plus[™] finish for display and dry environments — or Contender Grey TM Epoxy finish which is warranted for seven years against naturally occurring corrosion in high-moisture, high-humidity environments
- Each 48" shelf is rated to support up to 800 lbs. (363 kgs) of uniformly distributed static load weight — longer shelves can support up to 600 lbs. (272 kgs)
- Assembles in minutes without tools or hardware
- Shelves are installed on the posts in 1" (25mm) increments and can be changed easily as storage needs change



	ů		
PC	STS	SHE	LVES
MODEL#	DIMENSIONS	MODEL#	DIMENSIONS
P74	74"	LPS2436	24 x 36
		LPS2448	24 x 48
		LPS2460	24 x 60

- Corrosion free shelves heavy-duty epoxy coated steel frames and grey polypropylene plastic removable panels
- Antimicrobial agent protects the shelf finishes from bacteria, mold, mildew and fungi that cause odors, stains and product degeneration — keeping shelving cleaner in between cleanings*
- Available in solid and vented styles
- Sectional panels are easy to remove and clean
- Shelves can be used with ISS™ posts and shelving components — stainless steel posts recommended
- No tools or hardware required000 lbs. (455kgs) per shelf of uniformly distributed static weight





FROZEN STORAGE



KELMAX® CANTILEVER FRAMES AND ADJUSTABLE SHELVES

- Tubular base dunnage shelf is standard, and easily removed without the use of tools for cleaning
- Up to 5 additional shelf positions shelves can be added or removed without tools
- Available in 24" shelf depth
- Clearance between adjustable shelves is 10"
- Maximum load capacity per shelving unit is 2,800 lbs
- Frames and adjustable shelves sold separately



MODEL#	DIMENSIONS
4H1755	24 x 36 x 12
4H1814	24 x 48 x 12
4H1855	24 x 60 x 12

KELMAX® STANDARD TUBULAR DUNNAGE RACKS

- Square Tubular Dunnage Racks are an economical way to hold medium to heavy-duty boxes
- All units come with a lifetime guarantee against rust
- Extra-strong 1-1/2" square aluminum tubing
- Plastic cap feet
- 12" legs



MODEL#	DIMENSIONS
DUN2436	24 x 36 x 12
DUN2448	24 x 48 x 12
DUN2460	24 x 60 x 12

ISS® PLASTIC DUNNAGE RACKS

- Lightweight one-piece seamless polyethylene
- Rust and corrosion-proof
- Slotted to provide excellent air circulation
- Use in dry storage or in walk-in coolers/freezers
- Guaranteed for up to 10 years
- Holds up to 2,000 lbs. (907 kg.)
- Fits flush to adjacent units to maximize space utilization

STOC Grocery Solutions

DRY STORAGE



POSTS		SHELVES		
MODEL#	DIMENSIONS	MODEL#	DIMENSIONS	
P72	72"	A2436	24 x 36	
PC72	72"	A2448	24 x 48	
		A2460	24 x 60	

AMCO® WIRE SHELVING

- Unique square post design uses 27% more steel for greater strength and durability than typical round post systems
- Frame is 12-ga. solid steel
- Solid 2-1/8" robotic welds provide more stability than the two spot welds used on round post systems
- Shelves come in 5 widths and 8 lengths
- Shelves up to 48" long support up to 1,000 lbs. (450 kg)
- Shelves are available in wire (standard, extra-wide, slanted and inverted with ledge) — plus heavy-duty, 18-ga. solid stainless steel, and plastic (Plasteel® and Plastic Plus®)
- Assembly is fast and easy
- Shelves have solid edges instead of truss edges, making them easier to clean and label
- Other models available



PC	OSTS	SHE	LVES
MODEL#	DIMENSIONS	MODEL#	DIMENSIONS
P74	74"	2436	24 x 36
		2448	24 x 48
		2460	24 x 60

ISS® WIRE SHELVING

- Durable round post system is interchangeable with other manufacturers' shelving products
- Ideal for most any environment
- Shelves up to 60" long are rated to support 1,250 lbs. of uniformly distributed static weight
- Shelves feature extra trusses for a higher load rating, less deflection and the ability to use longer shelves
- Posts are numbered on 1" increments to speed assembly and ensure more precise shelf alignment
- Our one-piece hinged Sure-Lock™ coupler makes assembly easy and improves stability
- Shelves are available in wire, dunnage, Series 300 solid stainless steel and plastic
- Marine waterfall shelf edge allows easy loading and unloading
- Other models available



MODEL #	DIMENSIONS
IC2436KITCG	24 x 36 x 72
IC2448KITCG	24 x 48 x 72
IC2460KITCG	24 x 60 x 72

ISS CONTENDER® WIRE SHELVING

- ISS Contender™ round post shelving is a strong, economical solution for both dry and refrigerated storage needs
- Available with Plating Plus[™] finish for display and dry environments — or Contender Grey TM Epoxy finish which is warranted for seven years against naturally occurring corrosion in high-moisture, high-humidity environments
- Each 48" shelf is rated to support up to 800 lbs. (363 kgs) of uniformly distributed static load weight — longer shelves can support up to 600 lbs. (272 kgs)
- Assembles in minutes without tools or hardware
- Shelves are installed on the posts in 1" (25mm) increments and can be changed easily as storage needs change



POSTS		SHE	LVES
MODEL#	DIMENSIONS	MODEL#	DIMENSIONS
P74	74"	LPS2436	24 x 36
		LPS2448	24 x 48
		LPS2460	24 x 60

- Corrosion free shelves heavy-duty epoxy coated steel frames and grey polypropylene plastic removable panels
- Antimicrobial agent protects the shelf finishes from bacteria, mold, mildew and fungi that cause odors, stains and product degeneration — keeping shelving cleaner in between cleanings*
- Available in solid and vented styles
- Sectional panels are easy to remove and clean
- Shelves can be used with ISS™ posts and shelving components — stainless steel posts recommended
- No tools or hardware required000 lbs. (455kgs) per shelf of uniformly distributed static weight



DRY STORAGE



KELMAX® LOCKERS

- Heavy-duty steel construction
- Durable powder coated beige finish is standard. Other colors available subject to availability and lead times
- Padlock hasps are standard on all units for locking
- 15" Deep
- 6 Doors



MODEL #	DIMENSIONS
(00100	2/ 2/ /0

KELMAX® RECEIVING DESK

- Durable all steel construction · Lockable storage area
- Gray powder-coated finish



MODEL # DIMENSIONS SU1300CP 18 x 48 x 72

AMCO® SECURITY SHELVING

- Lockable wire enclosure limits opportunities to steal, reducing losses due to theft
- Provides a secure area with adjustable shelving for storage of costly items that tend to disappear
- 2"x 2" wire-spacing prevents small goods from being removed
- Door secures at both top and bottom, and handle has hasp design so it can be padlocked (padlock not included)
- Shelves and posts may be ordered in any available finish enclosure available in Plating PlusTM finish only
- Available in stationary and mobile models choose from a variety of standard caster offerings

55 Grocery Solutions

CAFE / BAR



COMPARTMENT SINKS W/ 2 DRAINBOARDS

MODEL#	BOWL DIMENSIONS	# OF BOWLS
3N1824-2D18	18 x 24	3
3N1824-2D24	18 x 24	3
DI-1-10	18 x 24	1

UNIVERSAL® STAINLESS COMPARTMENT SINKS

- Fully fabricated bowl with full metal thickness throughout for greater strength than competitors' drawn bowls
- 9" high integrally formed backsplash
- 2 -1/2" high, 180° sanitary rolled rim at all free edges
- Leg assemblies are located directly under sink bowls for greater load support
- Legs are 1-5/8" diameter tubing with adjustable bullet feet
- Comes with basket drains and 1-1/8" faucet holes punched in backsplash on 8" centers as required
- Fabricated with 16 GA 304 Series Stainless Steel
- 1, 2, and 3 Compartment Sinks, with 1, 2, or no Drainboards available in several sizes - Contact Sales Rep
- NSF listed and CSA certified



MODEL # DIMENSIONS EHS-1-RL 12 x 10 x 6 EHS-1 12 x 10 x 6


UNIVERSAL® STAINLESS HAND SINKS

- Choose from Standard Series 18-ga. embossed deck with fully welded bowl or robust Spec Series with 16-ga. fully formed and welded deck and bowl.
- 12" x 10" x 6" (305 x 254 x 152) bowl size
- 7" high integrally formed backsplash
- Inverted "V" non-drip edge on three sides
- Includes faucets, basket drains, and wall brackets
- Available with side splashes and electronic eye option- Contact Sales Rep



ISS® WALL-TRAX® SHELVING

- ISSTM Wall TraxTM is a complete wall mounted storage solution with specially engineered aluminum channel and grid system to increase efficiency and expand storage capacity.
- ISSTM Wall TraxTM channels and grids are easy to install
- Easily attach accessories without the need for tools or hardware
- All shelves can be moved by simply unhooking from grid or channel
- Available in three finishes, all corrosion-resistant, epoxy-based polymer coated: Grey Bond®, Gold Bond® and Black



WALL TRAX CHANNELS				
	18	TRAX18A		
LENGTH	24	TRAX2A		
LLINOTH	42	TRAX42APD		
	48	TRAX4A		
	50	WENTRAXAPD		
	60	TRAX5A		
	96	TRAX8A		

OFFSET GRID		HEIGHT		
		20	24	40
	24		GRO2424*	
LENGTH	36	GRO2036*	GRO2436*	
	48	GRO2048*	GRO2448*	GRO4048*

GRID AVAILABLE Finishes	
GOLD BOND	Υ
GREY	Е
STAINLESS STEEL	S
BLACK (GRWM ONLY)	BLK

GRID BASKETS		GRID SHELVES			TH
GB12106*		TYPE	LENGTH	14	18
GB12186*		GS	24	GS1424*	GS1824*
GB12246*		GS	36	GS1436*	GS1836*
GB18143*		GS	48	GS1448*	GS1848*
GB3420*	GRID	GSS	24	GSS1424*	GSS1824*
GB4512*	SHELVES	GSS	36	GSS1436*	GSS1836*
GB6186*		GSS	48	GSS1448*	GSS1848*
GB994*		GSL	24	GSL1424*	GSL1824*
		GSL	36	GSL1436*	GSL1836*
		GSL	48	GSL1448*	GSL1848*

GRID SHELF VAILABLE FINISH	ES
GOLD BOND	Υ
GREY	Е
STAINLESS STEEL	S



CAFE / BAR



WITH BACKSPLASH NO BACKSPLASH MODEL* DIMENSIONS MODEL* DIMENSIONS 4SLCB-30 30 x 48 x 36 4SLC-30 30 x 48 x 36 5SLCB-30 30 x 60 x 36 5SLC-30 30 x 60 x 36 6SLCB-30 30 x 72 x 36 6SLC-30 30 x 72 x 36

UNIVERSAL® STAINLESS PREP TABLES

- Standard N Series: 16-gauge 304 Series stainless steel top
- Square edge design for clean abutment to other equipment
- Legs: 1-5/8" O.D. 16-gauge stainless steel with adjustable bullet feet and stainless steel gussets
- Crossrails: 1-5/8" O.D. 16-gauge stainless steel notched to fit legs and fully welded
- Undershelves: 18-gauge 304 Series stainless steel with corners notched to fit legs and fully welded
- Standard working height is 36"

Grocery Solutions

- All tables 84" and longer come standard with 6 legs
- Ships welded and set up no assembly required
- Contact a Sales Representative for undershelf options



KNOCKDOWN	WI
MODEL#	

4H1144

WELDED

MODEL#

KELMAX® ALUMINUM STANDARD DUTY PAN RACKS

- Round tops and reinforced gussets for greater strength
- Runners welded to uprights
- Holds both 18" x 26" sheet pans and 14" x 18" trays
- Units have standard 5" polyurethane casters
- Lifetime guarantee against rust
- 20 Tray Capacity

MODEL# DIMENSIONS 4MCT-30 30 x 48 x 36 5MCT-30 30 x 60 x 36 6MCT-30 30 x 72 x 36

UNIVERSAL® STAINLESS POLY-TOP TABLES

- Choose from Standard Series 18-ga. embossed deck with fully welded bowl or robust Spec Series with 16-ga. fully formed and welded deck and bowl.
- 12" x 10" x 6" (305 x 254 x 152) bowl size
- 7" high integrally formed backsplash
- Inverted "V" non-drip edge on three sides
- Includes faucets, basket drains, and wall brackets
- Available with side splashes and electronic eye option- Contact Sales Rep



MODEL#

KELMAX® ALUMINUM Z-RACKS

- Z-Racks have reinforced gussets for greater strength
- Heavy-duty runners welded to uprights
- Holds 20 bun trays
- Keeps product fresher by allowing food to thaw properly
- Nesting reduces storage footprint by up to 50%
- Lifetime guarantee against rust
- Units have standard 5" polyurethane casters

Grocery Solutions

STOCKING



KELMAX® GALVANIZED STEEL STOCKING CART

- Versatile 2-tier high-capacity design
- Heavy duty galvanized solid top shelf (22" x 44")
- Galvanized square tube bottom shelf
- 5" polyurethane plate casters; 2 swivel and 2 rigid



MODEL#	DIMENSIONS
4H1468	20 x 36

KELMAX® ALUMINUM STOCKING CART

- Versatile 2-tier high-capacity design
- Aluminum Construction
- 5" polyurethane plate casters; 2 swivel and 2 rigid



4G0251 16 x 60

KELMAX® U-BOAT

- 6-wheel design offers maximum maneuverability · 2 8" rigid center polyurethane wheels
- 4 4" swivel polyurethane end casters
- One U-Boat does the work of five (5) hand trucks · 24" deck is available when a larger capacity is needed
- Diamond-Tread Deck

53FPC3™

DELI



 WITH BACKSPLASH
 NO BACKSPLASH

 MODEL*
 DIMENSIONS
 MODEL*
 DIMENSIONS

 4SLCB-30
 30 × 48 × 36
 4SLC-30
 30 × 48 × 36

 5SLCB-30
 30 × 60 × 36
 5SLC-30
 30 × 60 × 36

 6SLCB-30
 30 × 72 × 36
 6SLC-30
 30 × 72 × 36

UNIVERSAL® STAINLESS PREP TABLES


Grocery Solutions

- Standard N Series: 16-gauge 304 Series stainless steel top
- Square edge design for clean abutment to other equipment
- Legs: 1-5/8" O.D. 16-gauge stainless steel with adjustable bullet feet and stainless steel gussets
- Crossrails: 1-5/8" O.D. 16-gauge stainless steel notched to fit legs and fully welded
- Undershelves: 18-gauge 304 Series stainless steel with corners notched to fit legs and fully welded
- Standard working height is 36"
- All tables 84" and longer come standard with 6 legs
- Ships welded and set up no assembly required
- Contact a Sales Representative for undershelf options



FREESTYLE® CANTILEVER SHELVING

- Each shelf has a load-bearing capacity of 600 lbs. with a unit rating of 1,800 lbs. for cantilevered shelves and 1,000 lbs. capacity on the bottom shelf — for a total unit capacity of 2,800 lbs.
- No front uprights so it offers greater accessibility
- Increases sq. ft. and cubic volume storage capacity in existing footprint
- Adjustable shelves on 2" increments for maximum flexibility no tools required
- Unit is fully expandable side-to-side with Add-On unit using common uprights with dual-side adjustment
- Durable heavy-duty steel construction



- Shelves, uprights, and frame kits have a durable grey epoxybased finish with advanced antimicrobial protective agent
- Complete assortment of accessories including hanger rails and shelf covers in wire and stainless steel



MODEL # DIMENSIONS 4MCT-30 30 x 48 x 36 5MCT-30 30 x 60 x 36 6MCT-30 30 x 72 x 36

UNIVERSAL® STAINLESS POLY-TOP TABLES

- Choose from Standard Series 18-ga. embossed deck with fully welded bowl or robust Spec Series with 16-ga. fully formed and welded deck and bowl.
- 12" x 10" x 6" (305 x 254 x 152) bowl size
- 7" high integrally formed backsplash
- Inverted "V" non-drip edge on three sides
- Includes faucets, basket drains, and wall brackets
- Available with side splashes and electronic eye option- Contact Sales Rep



POSTS		SHE	LVES
	DIMENSIONS		DIMENSIONS
P74	74"	2436	24 x 36
		2448	24 x 48
		2460	24 x 60

ISS® WIRE SHELVING

- Durable round post system is interchangeable with other manufacturers' shelving products
- Ideal for most any environment
- Shelves up to 60" long are rated to support 1,250 lbs. of uniformly distributed static weight
- Shelves feature extra trusses for a higher load rating, less deflection and the ability to use longer shelves
- Posts are numbered on 1" increments to speed assembly and ensure more precise shelf alignment
- Our one-piece hinged Sure-Lock™ coupler makes assembly easy and improves stability
- Shelves are available in wire, dunnage, Series 300 solid stainless steel and plastic
- Marine waterfall shelf edge allows easy loading and unloading
- Other models available







ISS® WALL SHELVING





AMCO® CANTILEVER WALL SHELVING

AMCO CANTILEVER Shelves		WIDTH
		12
LENGTH	36	1236PG
	48	1248PG



AMCO® WALL SHELVING

- Kits include 1 or 2 wire shelves and one pair of wall standards
- Holds 250 lbs of evenly distributed static load per shelving unit
- The distance between the two shelves is 9-1/2"

AMCO WALL Shelf Kits		SUPPORT		
		FRONT	FRONT & REAR	
TIERS	1	W1236CP-1	W1236CPSH-1	
	2	W1236CP-2	W1236CPSH-2	
AMCO POST WALL MOUNT BRACKET		LENGTH		
		24		
MOUNT TYPE	SINGLE	AWB2		





MORE FROM SPG



VC COUNTER® WORKSTATION SOLUTIONS

SPG can customize an integrated counter system that's perfectly tailored to your space and your work processes. Seamlessly integrated top-of-the line materials combined with ergonomic design create a system that maximizes utility, optimizes workflow, improves storage and promotes a clean, organized workspace.

The modular counter system will deliver the lowest cost of ownership and drive staff productivity in every area of your operation — including:

- Drive-Thru · Dining
- Food Prep · Bakery
- Front Counter Operations



UNIVERSAL® STAINLESS ERGONOMIC **ADJUSTABLE TABLES**

The Universal® Stainless Adjustable Ergo Table is designed with a fold-away hydraulic crank — so the work surface can be raised or lowered quickly and easily. As a result, these innovative tables provide a customized fit for each employee — to improve staff comfort, increase productivity and optimize efficiency.

- Quickly, easily adjust table surface heights from 30" 42" or from 34" - 40"
- Uses 100% food-safe hydraulic fluid in a closed-loop system
- All models feature bullet feet, and can be ordered with casters by adding the suffix C to the part number.