


MATERIAL HANDLING & INDUSTRIAL STORAGE SOLUTIONS

spgusa.com

GAinfo@spgusa.com

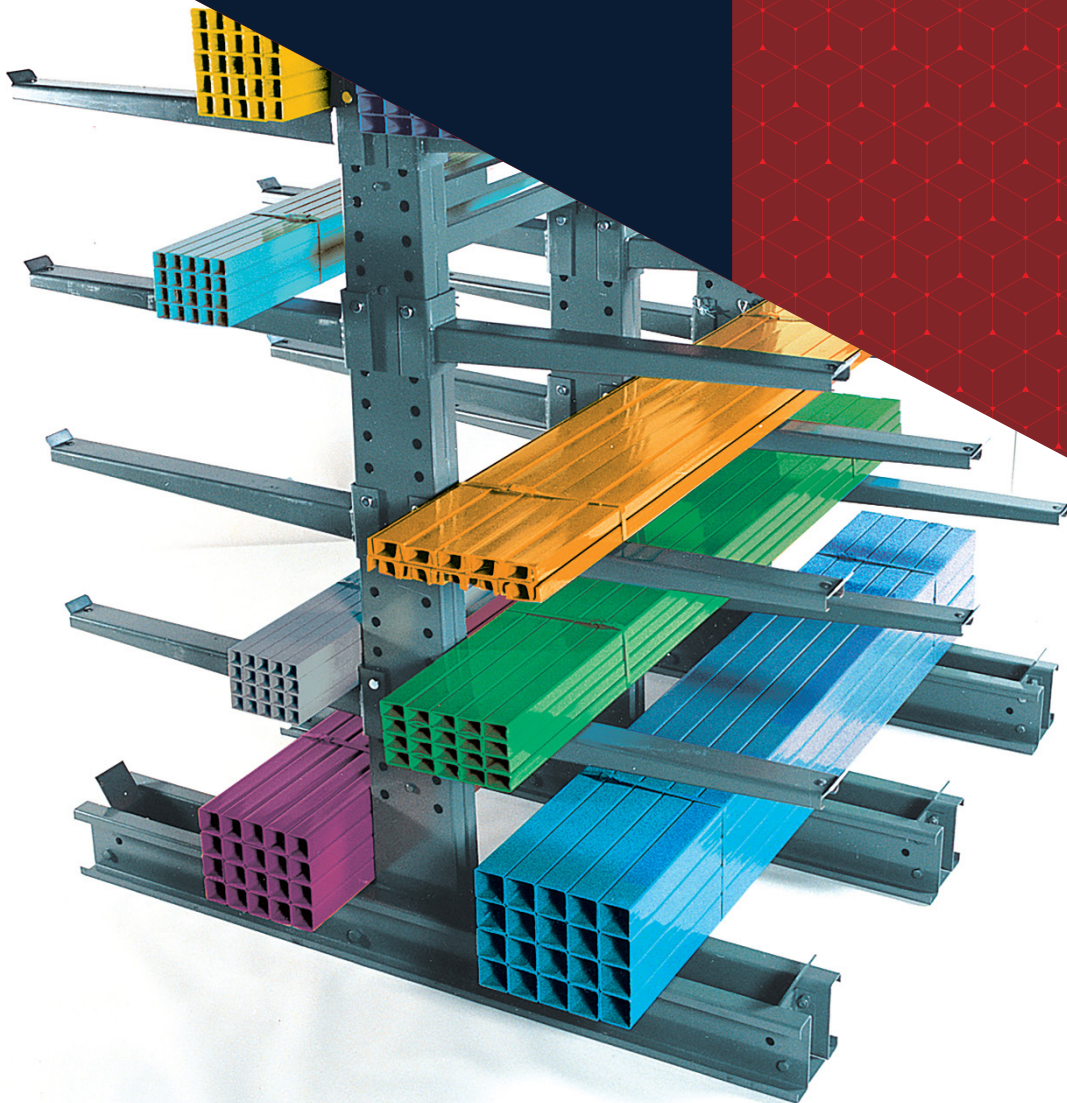

SPG brings greater organization to your organization with material handling systems from SPG.

You need to maximize the value of every square inch of space in your facilities. To achieve this, you need material handling and storage solutions that are efficient, reliable, economical, durable, proven, and designed for maximum safety.

Gillis and Jarke, two of the most trusted brands in the business, offer you all of this and more. All brought to you by SPG, a world leader in material handling and storage solutions, engineering and innovation.

In warehouses, factories, distribution centers, and backrooms throughout North America, you will find Gillis-Jarke products driving greater productivity and profitability in key facets of our customers' operations.

For more than half a century, businesses have turned to us for state-of-the-art storage and material handling solutions.

Today, the same high level of quality, value, versatility, and unequaled service is available to you in the broadest product line on the market.

Within this catalog you will find the systems and solutions you're looking for to maximize your storage space, protect your goods, manage inventory, enhance the flow of materials, increase accessibility, lower costs, and boost efficiency.

While all the products featured in this catalog are standard items, Gillis and Jarke brings to the market unsurpassed engineered product capabilities to transform difficult applications into custom storage and material handling solutions.

More performance. More durability. More innovation. More quality. More economy. Everything you need to get more out of and into every square inch of your space. To order from this catalog and put Gillis-Jarke to work for you, contact your dealer today.

STORAGE RACKS.....	4
PROTECTIVE RAIL SYSTEMS	27
LADDERS	31
PLATFORMS.....	40
CARTS.....	43

Storage Rack Solutions

It's not just what Jarke storage racks will hold that sets them apart. It's how they hold up. Rugged, durable, and versatile, Jarke storage racks from SPG offer you years of reliable service in even the toughest of applications.

Within the broad Jarke line are proven storage rack solutions that include:

- Stacking racks in a wide variety of configurations that maximize your floor space as they minimize clutter anywhere throughout your plant or warehouse
- Pallet rack systems that feature fast, easy assembly and rugged construction to stand up to the toughest conditions
- Specialty racks including EZ-Glide racks that feature 100% full extension roll-out shelving, heavy duty reel racks that can hold up to 10,000 lbs. and drum storage racks that deliver compact, high-density storage of 55 gallon drums

Contact a SPG Product Specialist for a
Free Solutions Consultation:

customerservice@spgusa.com

877.503.4SPG (4774)

**For More Equipment Options,
Contact SPG:**

877-503-4774

GAinfo@spgusa.com

Minitree™ Light Duty Cantilever Racks

This light-duty adjustable arm cantilever rack is especially suited for improving work area appearance and organization of light weight materials. The Minitree™ efficiently stores plastic, conduit, extrusions, hydraulic tubing and similar light weight materials.

- 250 lbs. capacity per arm
- Units can be configured as single or double arm racks
- Single column unit takes only 38" x 18 1/4" of floor space
- Complete unit includes 2 columns (with either single-sided or double-sided bases), 1 brace set, 14 arms plus hardware
- Features 7 pairs of adjustable arms for storing long and short materials
- 1750 lb. capacity per column per side*
- 12" Arm includes bolt on lip; arm is adjustable on 1 1/2" centers
- Ships unassembled (KD)



Minitree™ Cantilever Rack

Model No.	Description	Ht. (In.)	Arm Length (In.)	Capacity Per Arm (Lbs.)	Base Length (In.)	No. of Arms	Capacity Per Unit (Lbs.)	Wt. (Lbs.)
Complete Units								
MT251CS36	Single Arm Column Units	76 3/16	12	250	18 1/4	14 single	3,500	165
MT251CD36	Double Arm Column Units	76 3/16	12	250	30	14 double	7,000	215

Model No.	Description
Components	
MT251CS	7' Single Column & Base w/hardware
MT251CD	7' Double Column & Base w/hardware
MT251AS12	12" Single Arm w/Lip plus hardware
MT251AD12	12" Double Arm w/Lip plus hardware
MT251236	3' Brace Set w/hardware

Do not exceed column capacities. Column capacity rating does not include base.

Quiktree® Cantilever Rack

This rack is a light-medium duty rack that easily stores and organizes evenly distributed loads. Add-on feature allows the formation of complete storage rows. Begin with a starter unit, and join add-on units to reach desired length.

- 500 lb. capacity per arm (evenly distributed)
- Available in starter or add-on units
- Single or Double sided units
- Two different brace lengths 3' or 6'
- Adjustable 14" arms have end stops that mount up or flush
- Column height 7'
- Single sided unit has 14 arms, Double sided unit 28 arms
- Arm adjusts on 1½" centers tilt up at approx. 5°
- Column capacity 3,500 lbs. per side (not including base)
- Ships unassembled (KD)



Quiktree® Cantilever Rack
U.S. Patent No. 4,426,011

Model No.	Description	Ht. (In.)	Arm Length (In.)	Capacity Per Arm (Lbs.)	Base Length (In.)	No. of Arms	Brace Set Width	Capacity Per Unit (Lbs.)	Wt. (Lbs.)
Complete Units									
QT501S36	Starter Unit - Single Sided Base Column	7	14	500	21	14	3'	7,000	237
QT501S72	Starter Unit - Single Sided Base Column	7	14	500	21	14	6'	7,000	265
QT501D36	Starter Unit - Double Sided Base Column	7	14	500	34	28	3'	14,000	345
QT501D72	Starter Unit - Double Sided Base Column	7	14	500	34	28	6'	14,000	363
QT501S36A	Add-On Unit - Single Sided Base Column	7	14	500	21	7	3'	3,500	135
QT501S72A	Add-On Unit - Single Sided Base Column	7	14	500	21	7	6'	3,500	153
QT501D36A	Add-On Unit - Double Sided Base Column	7	14	500	34	14	3'	7,000	189
QT501D72A	Add-On Unit - Double Sided Base Column	7	14	500	34	14	6'	7,000	207

Model No.	Description
Components	
QT500CS	7' Single Column and Base w/hardware
QT500CD	7' Double Column and Base w/hardware
QT501B36	3' Brace Set (set of 2) w/hardware
QT501B72	6' Brace Set (set of 2) w/hardware
QT500A14	14" Arm with Cap and Bolts

Do not exceed column capacities. Column capacity rating does not include base.

Button-On™ Cantilever Rack

Button-On lets you load up to 2,000 lbs. at one time with a lift truck or manually. Provides an adjustable unit with as little as two columns, or assembles into a continuous system for growth. Arms "button" into position and adjust on 4" centers. 700 lbs. to 1,000 lbs. capacity per arm. Column capacity 12,000 lbs. per column per side. Unique inclined arm with 18° slope, buttons in place. Ideal for storing pipe, tubing, lumber and bar stock. Available in starter and add-on units.



US Patent No. 3,164,255

Starter and Add-On Units

Ht. (Ft.)	Arm Length	Capacity Per Arm (Lbs.)	Base Length (In.)	No. Of Arms	Brace Set Width	Capacity Per Unit (Lbs.)	Starter Model No.	Wt. (Lbs.)	No. Of Arms	Add-On Model No.	Wt. (Lbs.)
Single Column Unit											
7	12" inclined	1,000	26 1/2	12	6'	12,000	CR-1	314	6	CR-1A	182
7	12" straight	1,000	26 1/2	12	6'	12,000	CR-2	314	6	CR-2A	182
7	16" inclined	1,000	26 1/2	12	6'	12,000	CR-5	332	6	CR-5A	191
7	16" straight	1,000	26 1/2	12	6'	12,000	CR-6	332	6	CR-6A	191
10	20" straight	850	34 1/2	20	6'	17,000	CR-9	445	10	CR-9A	257
10	24" straight	700	34 1/2	20	6'	14,000	CR-10	485	10	CR-10A	277
Double Column Unit											
7	12" inclined	1,000	45	24	6'	24,000	CR-3	406	12	CR-3A	228
7	16" inclined	1,000	45	24	6'	24,000	CR-7	442	12	CR-7A	246
7	16" straight	1,000	45	24	6'	24,000	CR-8	442	12	CR-8A	246
10	20" straight	850	61	40	6'	34,000	CR-11	687	20	CR-11A	371

Button-On™ Cantilever Rack

Columns


Model No.	Wt. (Lbs.)	Ht. (In.)	Arm Length (In.)	Base Length (In.)	Capacity Per Side (Lbs.)	Maximum Arms
Columns Single Sided						
CR-061-A	105	7	12", 16"	26 1/2	12,000	8
CR-061-AL	111	7	20", 24"	34 1/2	12,000	8
CR-101-A	120	10	12", 16"	26 1/2	12,000	12
CR-101-AL	127	10	20", 24"	34 1/2	12,000	12
Columns Double Sided						
CR-061-B	124	7	12", 16"	45	12,000	16
CR-061-BL	136	7	20", 24"	61	12,000	16
---	140	10	12", 16"	45	12,000	24
CR-101-BL	156	10	20", 24"	61	12,000	24

US Patent No. 3,164,255

Do not exceed column capacities. Column capacity rating does not include base.

Pans for Arms

Contact Manufacturer




Brace Sets

Model No.	Wt. (Lbs.)	Width	Height
CR-061-EF	18	3'	7'
CR-061-GH	50	6'	7'
CR-061-JK	63	8'	7'
CR-101-GH	55	6'	10'
CR-101-JK	67	8'	10'

*3 Foot Columns Do Not Have Cross Bracing


Brace Set




Arms

Arms Length (In.)	Capacity Per Arm (Lbs.)	Model No.	Wt. (Lbs.)
Straight Arms			
12	1,000	CR-060-C3	4 1/2
16	1,000	CR-060-D3	6
20	850	CR-060-E3	8
24	700	CR-060-F3	9 1/2
Inclined Arms			
12	1,000	CR-060-C1	4 1/2
16	1,000	CR-060-D1	6

Straight Arm



Inclined Arm



Steeltree® 08 Series Cantilever Rack

The Medium Duty Steeltree® 08 Series is equal in function to our Heavy Duty Steeltree® 25-60 Series. The 08 Series is made with a lighter gauge steel and smaller dimensions of

component parts. Ideal for storing light bar stock, tubing, lumber, or other light-weight materials that are hand picked or easily damaged and must be kept off of the floor. Two or more uprights assemble as a single rack or a continuous unit consisting of any number of uprights to handle longer materials.

- 300 lbs. to 1,300 lbs. capacity per arm
- Sold as units or as component parts
- Single and double sided racks in four column heights
- Straight arms in lengths of 12", 18", 24", 30", 36", 48".
Inclined arms 12" to 36"
- Arms adjust on 3" centers
- Ships unassembled (KD)



Column Components

Column Height (Ft.)	Arm Length	Capacity Per Side (Lbs.)	Single Column Model No.	Base Length (In.)	Wt. (Lbs.)	Double Column	Base Length (In.)	Wt. (Lbs.)
6	12 & 18	12,000 & 10,500	08CS31072	34	99	08CD53072	52.5	119
6	24	7,500	08CS37072	40	104	08CD65072	64.5	129
6	30 & 36	6,500 & 5,700	08CS46072	49	115	08CD82072	81.5	143
6	48	4,300	08CS58072	61	123	08CD10472	103.5	157
7	12 & 18	12,000 & 10,500	08CS31084	34	108	08CD53084	52.5	128
7	24	7,500	08CS37084	40	113	08CD65084	64.5	138
7	30 & 36	6,500 & 5,700	08CS46084	49	124	08CD82084	81.5	152
7	48	4,300	08CS58084	61	135	08CD10484	103.5	166
8	12 & 18	12,000 & 10,500	08CS31096	34	118	08CD53096	52.5	138
8	24	7,500	08CS37096	40	123	08CD65096	64.5	148
8	30 & 36	6,500 & 5,700	08CS46096	49	134	08CD82096	81.5	162
8	48	4,300	08CS58096	61	145	08CD10496	103.5	189
10	12 & 18	12,000 & 10,500	08CS31120	34	136	08CD53120	52.5	156
10	24	7,500	08CS37120	40	141	08CD65120	64.5	166
10	30 & 36	6,500 & 5,700	08CS46120	49	152	08CD82120	81.5	180
10	48	4,300	08CS58120	61	163	08CD104120	103.5	194

Steeltree® 08 Cantilever Rack Starter and Add-On units shown

Brace Sets (set of 2)

Brace Length (Ft.)	Model No.	Wt. (Lbs.)
3	08B2036	20
4	08B2048	25
5	08B2060	30
6	08B2072	34
8	08B2096	44

Deck Support Receptacles

Description	Model No.	Wt. (Lbs.)
End Arm	08ASO-SR	3
Center Arm	08ASO-DR	3.5
Base	08CB-R	2.5

These receptacles are used to cradle 2 x 4's under plywood decking. They are available in both single and double sided designs and will accommodate all 08 series arms and bases, except 48"

Arm Components

Arm Length (In.)	Capacity (Lbs.)	Model No. With Lip	Wt. (Lbs.)	Model No. Without Lip	Wt. (Lbs.)	Model No. With Lip	Wt. (Lbs.)	Model No. Without Lip	Wt. (Lbs.)
Straight Arms					Inclined Arms				
12	1,300	08ASL12	8	08ASO12	8	08AIL12	9	08AIO12	9
18	870	08ASL18	9	08ASO18	9	08AIL18	10	08AIO18	10
24	650	08ASL24	11	08ASO24	11	08AIL24	12	08AIO24	12
30	520	08ASL30	12	08ASO30	12	08AIL30	13	08AIO30	13
36	430	08ASL36	14	08ASO36	14	08AIL36	15	08AIO36	15
48	300	08ASL48	16	08ASO48	16	NA	NA	NA	NA

Do not exceed column capacities. Smallest space between levels is 7".

Steeltree® 08 Series Cantilever Rack

Steeltree® Series 08 Complete Unit Breakdown

Stock No.	Quantity	Model No.	Description	Unit Weight
MS-7J	2 Ea.	08CS31084	7' Single Column/Base	313 lbs.
	1 St.	08B248	4' Brace Set	
	8 Ea.	08ASL18	18" Straight Arm With Lip	
MD-7J	2 Ea.	08CD53084	7' Double Column/Base	425 lbs.
	1 St.	08B248	4' Brace Set	
	16 Ea.	08ASL18	18" Straight Arm With Lip	
MS-8J	2 Ea.	08CS37096	8' Single Column/Base	359 lbs.
	1 St.	08B248	4' Brace Set	
	8 Ea.	08ASL24	24" Straight Arm With Lip	
MD-8J	2 Ea.	08CD65096	8' Double Column/Base	497 lbs.
	1 St.	08B248	4' Brace Set	
	16 Ea.	08ASL24	24" Straight Arm With Lip	
MS-10J	2 Ea.	08CS46120	10' Single Column/Base	506 lbs.
	1 St.	08B272	6' Brace Set	
	12 Ea.	08ASL36	36" Straight Arm With Lip	
MD-10J	2 Ea.	08CD82120	10' Double Column/Base	730 lbs.
	1 St.	08B272	6' Brace Set	
	24 Ea.	08ASL36	36" Straight Arm With Lip	


Add-On Unit Breakdown

Stock No.	Quantity	Model No.	Description	Unit Weight
MS-7AJ	1 Ea.	08CS31084	7' Single Column/Base	169 lbs.
	1 St.	08B248	4' Brace Set	
	4 Ea.	08ASL18	18" Straight Arm With Lip	
MD-7AJ	1 Ea.	08CD53084	7' Double Column/Base	225 lbs.
	1 St.	08B248	4' Brace Set	
	8 Ea.	08ASL18	18" Straight Arm With Lip	
MS-8AJ	1 Ea.	08CS37096	8' Single Column/Base	192 lbs.
	1 St.	08B248	4' Brace Set	
	4 Ea.	08ASL24	24" Straight Arm With Lip	
MD-8AJ	1 Ea.	08CD65096	8' Double Column/Base	261 lbs.
	1 St.	08B248	4' Brace Set	
	8 Ea.	08ASL24	24" Straight Arm With Lip	
MS-10AJ	1 Ea.	08CS46120	10' Single Column/Base	270 lbs.
	1 St.	08B272	6' Brace Set	
	6 Ea.	08ASL36	36" Straight Arm With Lip	
MD-10AJ	1 Ea.	08CD82120	10' Double Column/Base	382 lbs.
	1 St.	08B272	6' Brace Set	
	12 Ea.	08ASL36	36" Straight Arm With Lip	

Steeltree® 25 Series Cantilever Rack

The Steeltree® Heavy Duty is for storing large amounts of heavy materials in a compact area. Steeltree® is an excellent option for handling awkward or extremely heavy stock with a forklift. Ideal for bar and tube stocks and sheet material. Units assemble as a single rack or a continuous assembly of any number of racks to handle longer materials.

- 800 lbs. to 3,000 lbs. capacity per arm
- Jarke tapered column design compensates for deflection. ($\frac{1}{8}$ " per foot)
- Double tube bracing
- Sold as units or as component parts
- Single and double sided racks in four column heights
- Straight or inclined arms in lengths from 12" to 60"
- Arms adjust on 3" centers and have removable lips on the ends available
- Assembly is quick & easy no special tools needed

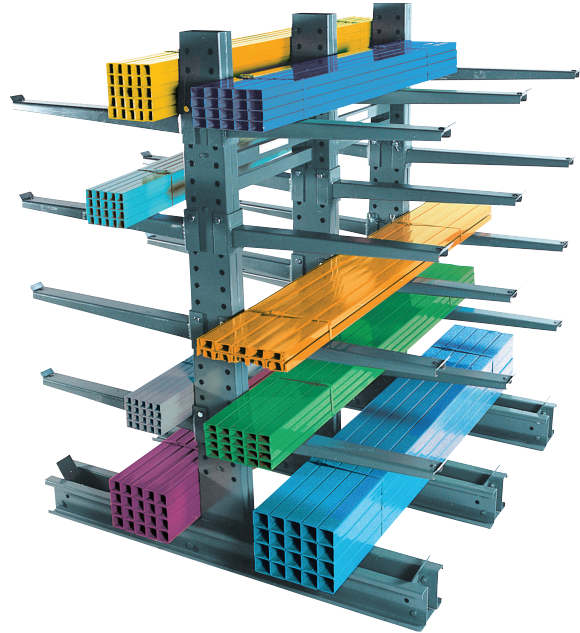

US Patent No. 3,512,654

Column Components

Column Height (Ft.)	Arm Length (In.)	Capacity Per Side (Lbs.)	Single Column Model No.	Base Length (In.)	Wt. (Lbs.)	Double Column Model No.	Base Length (In.)	Wt. (Lbs.)
8	12 & 18	18,520 & 14,950	25CS31096	34	183	25CD53096	52.5	210
8	24	12,530	25CS37096	40	191	25CD65096	64.5	236
8	30 & 36	10,780 & 9,460	25CS46096	49	211	25CD82096	81.5	252
8	42 & 48	8,430 & 7,600	25CS58096	61	221	25CD106096	105.5	292
10	12 & 18	25,650 & 20,640	25CS31120	34	201	25CD53120	52.5	228
10	24	16,860	25CS37120	40	209	25CD65120	64.5	254
10	30 & 36	14,250 & 12,340	25CS46120	49	229	25CD82120	81.5	270
10	42 & 48	10,880 & 9,730	25CS58120	61	239	25CD106120	105.5	310
10	54 & 60	8,800 & 8,030	25CS70120	73	270	25CD130120	129.5	330
12	12 & 18	26,300 & 20,450	25CS31144	34	233	25CD53144	52.5	260
12	24	16,730	25CS37144	40	241	25CD65144	64.5	286
12	30 & 36	14,160 & 12,270	25CS46144	49	261	25CD82144	81.5	302
12	42 & 48	10,830 & 9,690	25CS58144	61	271	25CD106144	105.5	342
12	54 & 60	8,760 & 8,000	25CS70144	73	302	25CD130144	129.5	362
15	24	16,540	25CS37180	40	371	25CD65180	64.5	414
15	30 & 36	14,020 & 12,170	25CS46180	49	385	25CD82180	81.5	438
15	42 & 48	10,750 & 9,620	25CS58180	61	402	25CD106180	105.5	473
15	54 & 60	8,710 & 7,560	25CS70180	73	419	25CD130180	129.5	508

Do not exceed column capacities. Column capacity rating does not include base. Double column is twice capacity shown.

25CS

Steeltree® 25 Series Cantilever Rack

Steeltree® 25 Series - Arm Components - Standard

Arm Length (In.)	Capacity Per Arm (Lbs.)	Model No. With Lip	Wt. (Lbs.)	Model No. Without Lip	Wt. (Lbs.)	Model No. With Lip	Wt. (Lbs.)	Model No. Without Lip	Wt. (Lbs.)
Straight Arms					Inclined Arms				
12	3,000	25ASL12	11	25ASO12	11	25AIL12	12	25AIO12	12
18	2,500	25ASL18	13	25ASO18	13	25AIL18	14	25AIO18	14
24	2,000	25ASL24	15	25ASO24	15	25AIL24	16	25AIO24	16
30	1,600	25ASL30	17	25ASO30	17				
36	1,300	25ASL36	20	25ASO36	20				
42	1,145	25ASL42	22	25ASO42	22				
48	1,000	25ASL48	24	25ASO48	24				
60	800	25ASL60	29	25ASO60	29				

*Do not exceed column capacities.

Steeltree Arm Components—Heavy Duty

Arm Length (In.)	Capacity Per Arm (Lbs.)	Model No. With Lip	Wt. (Lbs.)	Model No. Without Lip	Wt. (Lbs.)
Straight Arms (8' Column uses up to 48" arms max.)					
36	2,175	40ASL36	28	40ASO36	28
42	1,865	40ASL42	31	40ASO42	31
48	1,630	40ASL48	34	40ASO48	34
54	1,480	40ASL54	37	40ASO54	37

*Do not exceed column capacities. Capacity is for evenly distributed loads.

Deck Support Receptacles

Model No.	Description	Wt. (Lbs.)
25ASO-SR	End Arm	3
25ASO-DR	Center Arm	3.5
25CB-R	Base	2.5

These receptacles are used to cradle 2 x 4's under plywood decking. They are available in both single and double sided designs and will accommodate all 25 series arms and bases.

Steeltree Arm Components—Extra Heavy Duty

Arm Length (In.)	Capacity Per Arm (Lbs.)	Model No. With Lip	Wt. (Lbs.)	Model No. Without Lip	Wt. (Lbs.)
Straight Arms (10', 12', 15' Columns only)					
36	3,300	60ASL36	43	60ASO36	43
42	2,850	60ASL42	49	60ASO42	49
48	2,500	60ASL48	52	60ASO48	52
54	2,250	60ASL54	57	60ASO54	57
60	2,000	60ASL60	62	60ASO60	62

*Do not exceed column capacities. Capacity is for evenly distributed loads.

Steeltree Series 25 & 60 Brace Sets

Brace Length (ft)	Model No.	Wt. (Lbs.)	Brace Length (ft)	Model No.	Wt. (Lbs.)	Brace Length (ft)	Model No.	Wt. (Lbs.)
Brace Sets for 8' Columns			Brace Sets for 10' & 12' Columns			Brace Sets for 15' Columns		
3	25B2036	34	3	25B3036	51	3	25B4036	91
4	25B2048	43	4	25B3048	65	4	25B4048	114
5	25B2060	52	5	25B3060	79	5	25B4060	137
6	25B2072	62	6	25B3072	93	6	25B4072	158
8	25B2096	82	8	25B3096	123	8	25B4096	205

Steeltree® 25 Series Cantilever Rack

Complete Unit Breakdown

Stock No.	Quantity	Model No.	Description	Unit Weight
SC-8J	2 Ea.	25CS37096	8' Single Column/Base	564 lbs.
	1 St.	25B272	6' Brace Set	
	8 Ea.	25ASL24	24" Straight Arm With Lip	
DC-8J	2 Ea.	25CD65096	8' Double Column/Base	774 lbs.
	1 St.	25B272	6' Brace Set	
	16 Ea.	25ASL24	24" Straight Arm With Lip	
SC-10J	2 Ea.	25CS46120	10' Single Column/Base	791 lbs.
	1 St.	25B372	6' Brace Set	
	12 Ea.	25ASL36	36" Straight Arm With Lip	
DC-10J	2 Ea.	25CD82120	10' Double Column/Base	1,113 lbs.
	1 St.	25B372	6' Brace Set	
	24 Ea.	25ASL36	36" Straight Arm With Lip	
SC-12J	2 Ea.	25CS58144	12' Single Column/Base	1,019 lbs.
	1 St.	25B372	6' Brace Set	
	16 Ea.	25ASL48	48" Straight Arm With Lip	
DC-12J	2 Ea.	25CD106144	12' Double Column/Base	1,545 lbs.
	1 St.	25B372	6' Brace Set	
	32 Ea.	25ASL48	48" Straight Arm With Lip	

Add-On Unit Breakdown

Stock No.	Quantity	Model No.	Description	Unit Weight
SC-8AJ	1 Ea.	25CS37096	8' Single Column/Base	313 lbs.
	1 St.	25B272	6' Brace Set	
	4 Ea.	25ASL24	24" Straight Arm With Lip	
DC-8AJ	1 Ea.	25CD65096	8' Double Column/Base	418 lbs.
	1 St.	25B272	6' Brace Set	
	8 Ea.	25ASL24	24" Straight Arm With Lip	
SC-10AJ	1 Ea.	25CS46120	10' Single Column/Base	442 lbs.
	1 St.	25B372	6' Brace Set	
	6 Ea.	25ASL36	36" Straight Arm With Lip	
DC-10AJ	1 Ea.	25CD82120	10' Double Column/Base	603 lbs.
	1 St.	25B372	6' Brace Set	
	12 Ea.	25ASL36	36" Straight Arm With Lip	
SC-12AJ	1 Ea.	25CS58144	12' Single Column/Base	556 lbs.
	1 St.	25B372	6' Brace Set	
	8 Ea.	25ASL48	48" Straight Arm With Lip	
DC-12AJ	1 Ea.	25CD106144	12' Double Column/Base	819 lbs.
	1 St.	25B372	6' Brace Set	
	16 Ea.	25ASL48	48" Straight Arm With Lip	

Steeltree® 60 Series Cantilever Rack

- 2,000 lbs. to 3,300 lbs. capacity per arm
- The 60 Series columns utilize all the 25, 40 and 60 Series arm and brace components
- The advantage of the 60 Series Steeltree® is greater column capacity.
- 60 Series is also a tapered column designed to compensate for deflection.

US Patent No. 3,512,654


Do not exceed column capacities. Column capacity rating does not include base.

Column Component


Column Height (Ft.)	Arm Length (In.)	Capacity Per Side (Lbs.)	Single Column Model No.	Base Length (In.)	Wt. (Lbs.)
8	12 & 18	36,780 & 31,340	60CS37096	40	321
8	24	27,310	60CS43096	46	331
8	30 & 36	24,190 & 21,710	60CS52096	55	346
8	42 & 48	19,700 & 18,025	60CS64096	67	367
8	54 & 60	16,610 & 15,400	60CS76096	79	388
10	24	27,450	60CS43120	46	382
10	30 & 36	24,310 & 21,810	60CS52120	55	398
10	42 & 48	19,775 & 18,090	60CS64120	67	418
10	54 & 60	16,660 & 15,450	60CS76120	79	439
12	30 & 36	24,425 & 21,900	60CS52144	55	444
12	42 & 48	19,850 & 18,150	60CS64144	67	464
12	54 & 60	16,720 & 15,500	60CS76144	79	485
15	42 & 48	19,970 & 18,250	60CS64180	67	535
15	54 & 60	16,800 & 15,570	60CS76180	79	556

Column Height (Ft.)	Arm Length (In.)	Capacity Per Side (Lbs.)	Double Column Model No.	Base Length (In.)	Wt. (Lbs.)
8	30 & 36	24,190 & 21,710	60CD88096	87.5	402
8	42 & 48	19,700 & 18,025	60CD112096	111.5	444
10	30 & 36	24,310 & 21,810	60CD88120	87.5	454
12	30 & 36	24,425 & 21,900	60CD88144	87.5	500
12	42 & 48	19,850 & 18,150	60CD112144	111.5	541

Steeltree® Series Cantilever Rack Diagrams

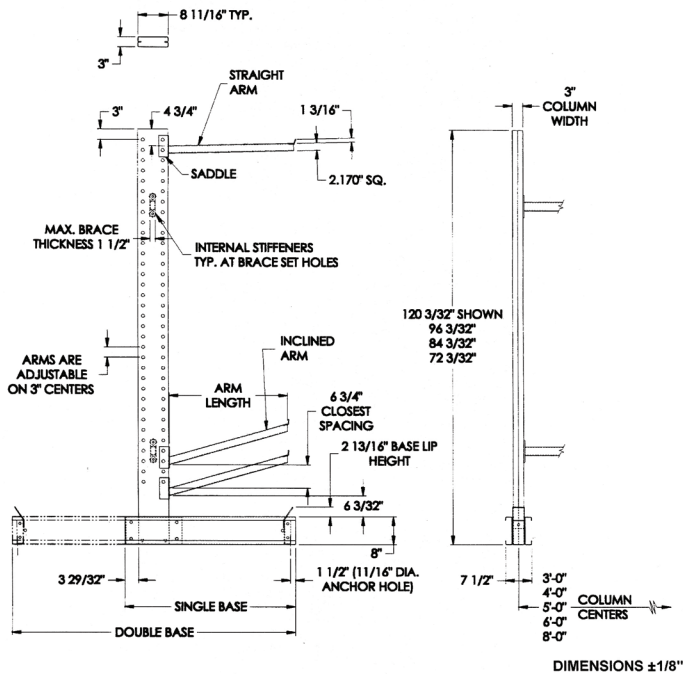

Steeltree® Series 08
Column Details

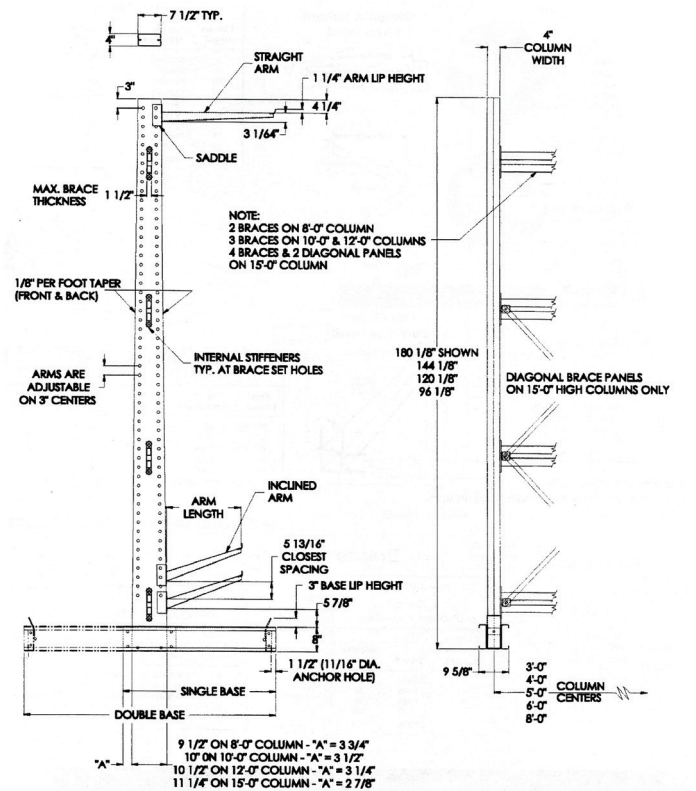

Steeltree® Series 25
Column Details


Cantilever Rack Selection Guides

Define the Load

1. Length:
2. Depth:
3. Height:
4. Weight:
5. Horizontal Arm Spacing:

Load Deflection-Determine the Number of Uprights

Load deflection is characterized as the sagging of the load between the arms. Space blocks on the floor at an equal distance apart under the load until you have no sagging. Each block represents one arm. The arm will be connected to the upright to support the load.

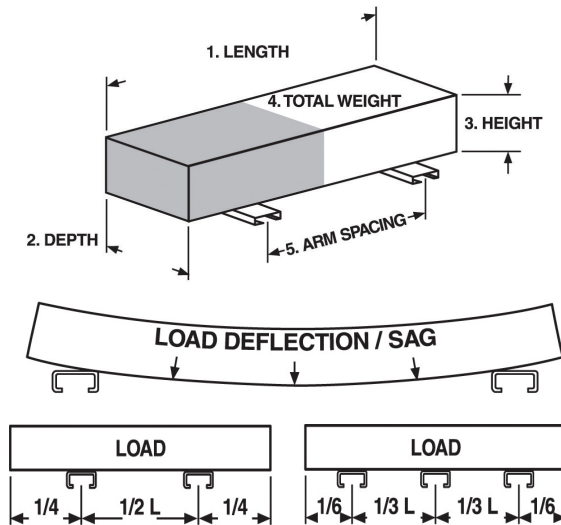


For safe loads with two-arm support distance between arms should be $\frac{1}{2}$ the load and length.

Three arm support should be $\frac{1}{3}$ the load and length.


Arm Selection

1. Divide the total weight by the number of arms, as required.
2. Match the load capacity required with the appropriate arm length and select proper arm from table. Arm length should equal load depth.



Arm Loading

All capacities are based on uniformly distributed load.

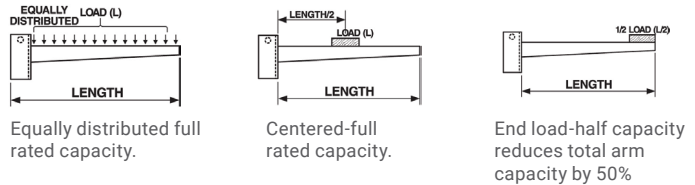


Column Capability

Do not exceed column capacities. Count the number of arms to be used on column; find arm capacity on spec sheet and multiply by number of arms per column.

Typical Cantilever Loading Pattern

Load weights must be evenly distributed over number of arms used to support it. The overhang should equal $\frac{1}{2}$ the column spacing. This will assure even loading on all arms.

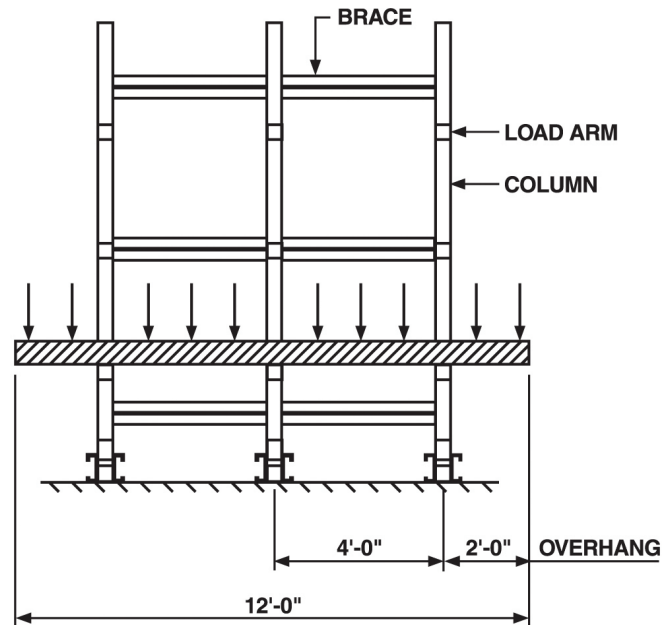

Bar Storage Racks

Vertical Storage Racks

All-welded steel components bolt together for quick and easy assembly creating a rack that stores long material vertically. Arms extend 6" beyond shelves creating divided storage. Four separate shelf levels allow for storage of smaller lengths and drops in same bay. Use in tool rooms, maintenance areas, machine centers, storage areas and point of purchase displays.

- 3,000 lb. capacity per unit
- Use as an island of storage or as a continuous row
- Stores long material up to 12' long
- Shelves are 12 gauge steel
- Individually packaged and ships unassembled (KD)
- Painted gray

Model No.	Height (In.)	Width (In.)	Depth (In.)	Capacity (Lbs.)	Wt. (Lbs.)
CR-834	84	36	24	3,000	110



Vertical Storage Rack

Horizontal Storage Racks

Horizontal storage is a terrific option for storing angles, bars, pipes, etc. up to 10' long. Additional units could be positioned to accommodate items longer than 10' with two or more units.

- 1,800 lb. capacity per unit
- Use as islands of storage or as continuous rows.
- 9 arm levels extend 9" on 6" spacing
- Rack is 84" high with a 30" x 30" base that tapers upward
- Individually packaged and ships unassembled (KD)
- Painted gray

Model No.	Height (In.)	Base Dim. (In.)	Base Dim. (In.)	Wt. (Lbs.)
CR-833	84	30	30	105




Horizontal Storage Rack

Bar Storage Racks

This rack will easily organize bar ends, saw drops and pipe. This system allows for fast identification and retrieval of materials as needed.

- Starter unit 500 lbs capacity per opening, 66 openings 16,000 lbs. total capacity
- Add-on unit adds additional 5,300 lbs. to capacity
- Heavy Duty uprights, 1/4" thick steel grid
- Bolts together for easy assembly
- Optional painted shelf

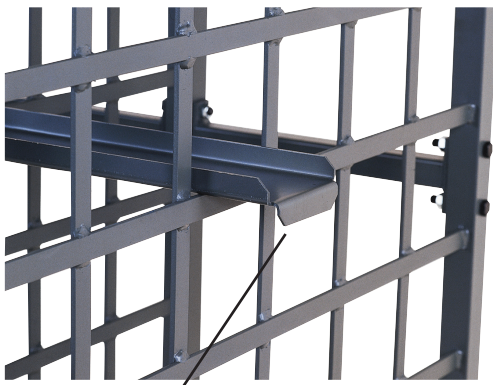

Opening is 5 1/2" W x 5 1/2" H



Bar Storage Rack—Starter unit

Model No.	Description	Paint	Height (In.)	Width (In.)	Depth (In.)	Opening (Lbs.)	Wt. (Lbs.)
BSRS	Starter Unit	Gray	36 1/2	41 1/2	74 3/4	5 1/2 x 5 1/2	264
BSRA	Add-On Unit	Gray	17	41 1/2	74 3/4	5 1/2 x 5 1/2	92
BSR-SHELF	Shelf (each)	Gray	2	5 1/2	36	---	5


Mini-Module® Stacking Rack

The Mini-Module is an efficient, low-cost means to quickly organize floor clutter anywhere in your plant or warehouse. Sturdy, lightweight and easy to handle, completely flexible storage system for all sorts of materials. Jarke mini-module installations are expandable in width, height and length.



- 2,500 lbs. to 7,500 lbs. capacity per single compartment unit
- Heavy Duty all welded steel construction
- Materials are accessible as individual pieces
- No bolts, no tools, no fittings required in set-up or take-down
- Stack up mini-modules to the length, height and width you require
- Shelves and shelf dividers available to further segment compartment
- Quick storage and retrieval of long material
- 8'-10' long materials utilize 2 units, 12'-16' long materials utilize 3 units and 16' to 24' length materials use 4 units.

Painted gray

US Patent No. 2,801,752

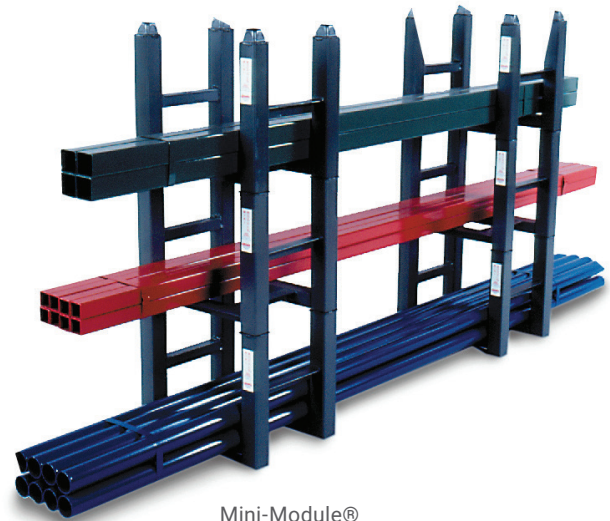

Mini-Module®
6 units shown

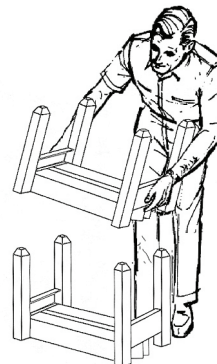

Shelf: Divides full capacity into 2 sections.

Mini-Module Single Compartment Unit

Model No.	Inside Dim. H x W x D (In.)	Outside Dim. H x W x D (In.)	Capacity (Lbs.)	Wt. (Lbs.)
SZ AX	12 x 12 x 8	15 x 16 x 12	2,500	18
SZ BX	15 x 15 x 10	18.5 x 19 x 14	3,700	26
SZ CX	18 x 18 x 11	22 x 22 x 15	5,600	31
SZ DX	20 x 22 x 12	25 x 26 x 16	7,500	49


Stacking Racks

Stackmaster™ U-Rack System

U-Racks are a low-cost storage alternative for long-unwieldy materials. U-Racks can be stacked up to four high, offering quick, stable, low-density storage for long materials such as bars, pipe, tubing, angles, channels, and plastic shapes. Use for long term or as temporary storage next to a work station. Excellent product separators.

- 6,000 lbs. or 10,000 lbs. capacity per pair
- Stacks up to 4 levels high, with nesting flanges trapping unit above
- All welded construction, no tools needed for assembly
- Lightweight construction, one person set-up
- Ideally suited for changing storage requirements
- Finished in high visibility orange powdercoat

Model No.	Inside Dim. H x W x D (In.)	Capacity (Lbs.)	Wt. (Lbs.)
ULD-06	16.5 x 22.5 x 15.75	6,000	25
ULD-10	16.5 x 22.5 x 15.75	10,000	30

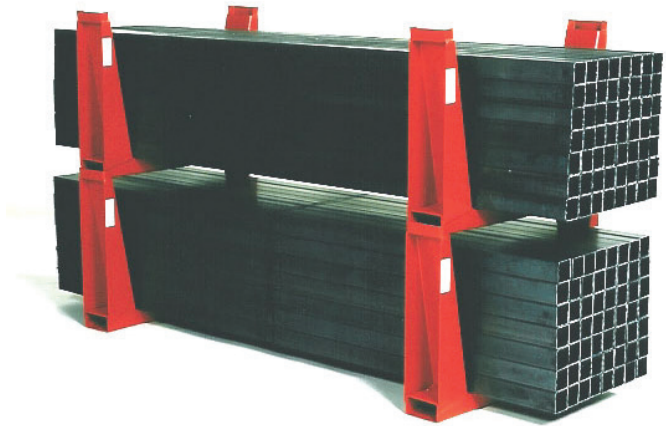

Stackmaster™ U-Rack System
4 units shown

Tubular Wire Rack

This rack is ideal for use when 4-way entry is not required. This all-tubular series provides storage planning at a savings in cost. Rugged steel construction with high nesting plugs. Hook slots and ribbing are available as optional features.

- 4,000 lbs. capacity
- Square tubular steel posts
- 2-way front fork entry only
- 3 High stackability

Model No.	For Coil Diameter (In.)	Inside Dim. H x W x D (In.)	Wt. (Lbs.)
TW-2428	24 - 28	20 x 35.2	103
TW-2933	29 - 33	22 x 39.95	111
TW-3438	34 - 38	24 x 44.7	118
TW-3943	39 - 43	26 x 49.7	128
TW-4448	44 - 48	28 x 55.2	136



Tubular Wire Rack

* Non-skid ribbing available for a minimal add-on charge.
Minimum quantity order: 10 units.

Airector® Stacking Racks

Jarke Airector® racks combine the unit load capabilities of a pallet with the product protection of stacking posts. The welded tubular steel construction provides Airectors with dependable load carrying strength. Painted Gray

- 2,000 lbs. and 4,000 lbs. capacity
- Designed for 4-way forklift handling
- Wood or open bases (contact factory for information on steel bases)
- Comes standard with 9" high corner sockets



Airector® Stacking Racks
3 bases shown with posts


Airector Heavy Duty Bases - Base Only

Model No. 2,000 Lbs. Cap.	O.A. Width (In.)	O.A. Length (In.)	Wt. (Lbs.)	Model No. 4,000 Lbs. Cap.	O.A. Width (In.)	O.A. Length (In.)	Wt. (Lbs.)
Open Deck							
BB2-4248H	42	48	60	BB4-4248H	42	48	89
BB2-4260H	42	60	77	BB4-4260H	42	60	109
BB2-4848H	48	48	65	BB4-4848H	48	48	104
BB2-4860H	48	60	82	BB4-4860H	48	60	127
Wood Deck							
BB2-4248HW	42	48	80	BB4-4248HW	42	48	96
BB2-4260HW	42	60	101	BB4-4260HW	42	60	114
BB2-4848HW	48	48	89	BB4-4848HW	48	48	111
BB2-4860HW	48	60	112	BB4-4860HW	48	60	135

Heavy Duty Post Sets - Set of 4


Ht. (In.) Above Deck	Model No. 2,000 Lbs. Cap.	Wt. Per Set (Lbs.)	Model No. 4,000 Lbs. Cap.	Wt. (Lbs.)
36	PT-2-36	30	PT-4-36	38
42	PT-2-42	33	PT-4-42	42
48	PT-2-48	36	PT-4-48	47
60	PT-2-60	42	PT-4-60	55

Height shown from top of deck to underside of target.
Heavy duty channel collar—(sets of 4). Available upon request.
End or Side Frames Interchangeable, removable.
4000 lb. capacity end/side frames* (set of 2).
Sized to your application. Consult factory.

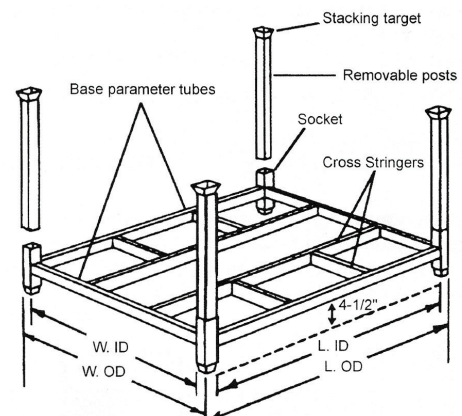

QUIKtier® Shelving

Select QUIKtier for maximized storage space & minimized cost. Boltless beam connectors with integral lock allow for inexpensive, rapid assembly & low maintenance. Integral lock prevents accidental dislodging of beams due to upward force. Any beam is interchangeable with any upright. Beams adjust on 2 1/2" centers. Compatible with automated storage and retrieval. To determine the sizes and capacities needed, find the depth in the first column and then follow across chart to the upright height as required.

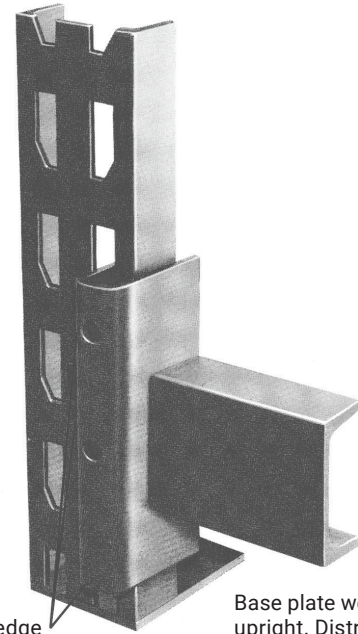

Three point wedge connection provides great strength and rigidity.

Base plate welded to upright. Distributes load over a wider area.

Structural Frame QUIKtier™ Selection Chart

Upright Frame Ht.						
	8'	10'	12'	14'	16'	Upright Capacity
Depth (In.)	Model No. Wt. (Lbs.)	Model No. Wt. (Lbs.)	Model No. Wt. (Lbs.)	Model No. Wt. (Lbs.)	Model No. Wt. (Lbs.)	(Lbs.)
36	QU-36096	QU-36120	QU-36144	QU-36168	Contact Customer Service	31,000
	83	105	125	145	167	
42	QU-42096	QU-42120	QU-42144	QU-42168	QU-42192	31,000
	85	108	128	148	171	
48	QU-48096	QU-48120	QU-48144	QU-48168	QU-48192	31,000
	87	111	131	151	175	

*31,000 based on level of first shelf not to exceed 48" above floor. First shelf level that exceeds 48' will reduce upright capacity. Call factory for rating information or capacities other than shown.

Structural Channel Beams

Beam Length (Clearspan)				
	60"	72"	84"	96"
Beam Ht. (In.)	Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.)	Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.)	Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.)	Model No. Capacity (Lbs.) Wt. Per Pr. (Lbs.)
3	Contact Customer Service	30CLO72	Contact Customer Service	30CLO96
	8,800	7,330	5,920	4,530
	49	58	67	76
4	40CLO60	Contact Customer Service	40CLO84	40CLO96
	9,600	9,600	9,600	9,600
	58	69	80	90

*Requires one beam tie per pair of beams. Higher capacities available, consult factory. Beam capacities are per pair of beams


QUIKtier® Shelving Accessories

Rigid Back-to-Back Ties

Model No.	Length (In.)	Wt. (Lbs.)
TR-06	6	4
TR-08	8	4
TR-10	10	5

Flush Drop-in Skid Supports

Model No.	Used with Upright Width (In.)	Capacity Each (Lbs.)	Wt. (Lbs.)
F-SS36	36	1,500	17
F-SS42	42	1,300	20
F-SS48	48	1,100	22

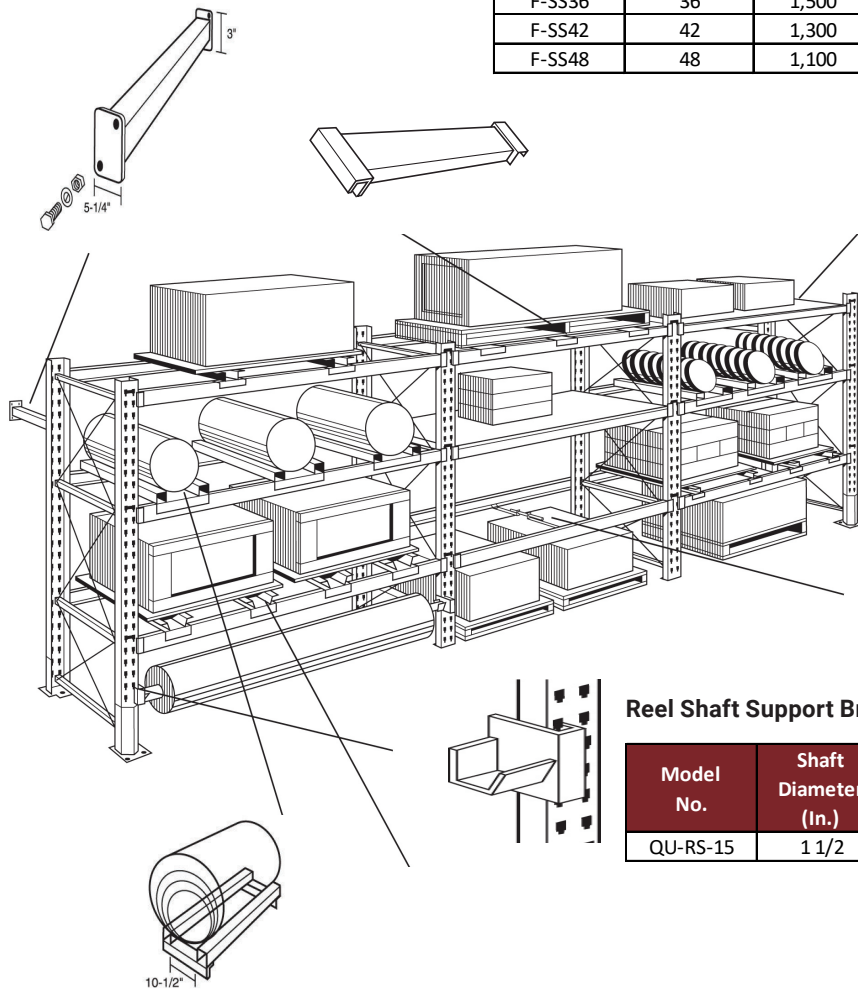

Universal Beam Tie (Fits All Beams)

Model No.	Used with Upright Width (In.)	Wt. (Lbs.)
TB-3048	30 to 48	10

Reel Shaft Support Bracket (QUIKtier only)

Model No.	Shaft Diameter (In.)	Capacity Each (Lbs.)	Wt. (Lbs.)
QU-RS-15	1 1/2	3,000	5

Drop-in Coil/Drum Cradles Used for wire, strip or any other cylindrical load

Model No.	Used with Upright Width (In.)	Capacity Each (Lbs.)	Wt. (Lbs.)
QBC-48	48	650	16

Fork Truck Clearance Strut

Model No.	Used with Upright Width (In.)	Capacity Each (Lbs.)	Wt. (Lbs.)
FS-48	48	2,450	18

EZ-Glide™ Specialty Rack


100% Full Extension Roll-Out Shelving

High density storage, E-Z Glide's 100% shelf extension allows quick, efficient loading and unloading of bulky items. Shelves roll out even when loaded to capacity. Easy to install. Shipped knocked down. The E-Z Glide has welded and bolted construction with a solid steel top deck for extra rigidity (top deck does not roll out). Top deck may be used as the pick up point to conveniently relocate empty racks and for use as additional storage. All standard E-Z Glide units have available add-on units that share a common upright. The add-on is for wall-to-wall racking of shelves...or any length in between. The add-on connects to existing shelves creating a continuous assembly of any number. Units should be anchored to the floor. (Anchors not included)

- 2,000 lbs. capacity per shelf (DOES NOT INCLUDE UNIT TOP)
- Full 100% extension of every shelf
- Individual shelf height adjustable based on 2 inch centers
- Modular construction allows bolt-together expansion of multiple units.
- Horizontal access by fork lift truck, cart, hand truck or any method with a height adjusting bed
- Vertical access via crane, manipulator or monorail system
- Welded and bolted construction
- Nine (9) starter & add-on models available



EZ-Glide

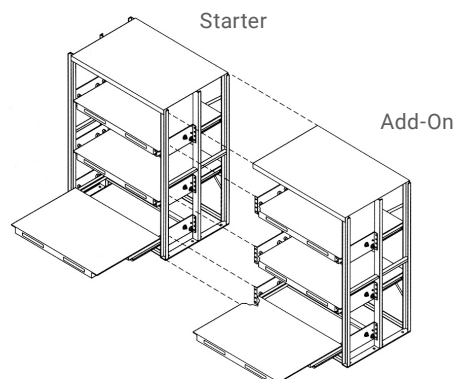

Starter Model No.	Shelf Size (In.)	No. of Shelves	Overall Ht. (In.)	Wt. (Lbs.)	Add-On Model No.	Wt. (Lbs.)
EZ363662	36 x 36	3	62 1/2	911	EZ363662A	831
EZ483662	48 x 36	3	62 1/2	1,053	EZ483662A	973
EZ484862	48 x 48	3	62 1/2	1,260	EZ484862A	1,174
EZ363672	36 x 36	3	72 1/2	932	EZ363672A	842
EZ483672	48 x 36	3	72 1/2	1,074	EZ483672A	984
EZ484872	48 x 48	3	72 1/2	1,281	EZ484872A	1,185
EZ363684	36 x 36	4	84 1/2	1,166	EZ363684A	1,063
EZ483684	48 x 36	4	84 1/2	1,348	EZ483684A	1,245
EZ484884	48 x 48	4	84 1/2	1,510	EZ484884A	1,407

Additional Shelves (2,000 Lbs. Capacity)				
EZSH3636	36 x 36	---	---	210
EZSH4836	48 x 36	---	---	248
EZSH4848	48 x 48	---	---	303


Heavy Duty Reel Rack

- 2,000 lbs. per level with 10,000 lbs. maximum capacity per rack
- Provides quick and uncluttered access
- Comes standard with 4 sets of rack axle brackets which accept axle up to 2" diameter (axle not included)
- Axle brackets adjust on 2" center
- 24" maximum reel dimension

Recommend that unit be secure to the floor. (Anchors not included)

Overall Dim. W x D x H (In.)	Inside Clear Dimensions W x D x H (In.)	Starter Model No.	Wt. (Lbs.)
24 x 24 x 96	17 5/8 x 24 x 96	RR242496	236
36 x 24 x 96	29 5/8 x 24 x 96	RR362496	252
48 x 24 x 96	42 5/8 x 24 x 96	RR482496	268
24 x 36 x 96	17 5/8 x 36 x 96	RR243696	254
36 x 36 x 96	29 5/8 x 36 x 96	RR363696	270
48 x 36 x 96	42 5/8 x 36 x 96	RR483696	286
24 x 24 x 120	17 5/8 x 24 x 120	RR2424120	269
36 x 36 x 120	29 5/8 x 36 x 120	RR3636120	305
48 x 36 x 120	42 5/8 x 36 x 120	RR4836120	321
Brackets 1-Set	---		7

Overall Dim. W x D x H (In.)	Inside Clear Dimensions W x D x H (In.)	Add-On Model No.	Wt. (Lbs.)
36 x 24 x 96	29 5/8 x 24 x 96	RA362496	165
48 x 24 x 96	42 5/8 x 24 x 96	RA482496	181
24 x 36 x 96	17 5/8 x 36 x 96	RA243696	158
36 x 36 x 96	29 5/8 x 36 x 96	RA363696	174
48 x 36 x 96	42 5/8 x 36 x 96	RA483696	190
48 x 36 x 120	42 5/8 x 36 x 120	RA4836120	207
Brackets 1-Set	---	---	---

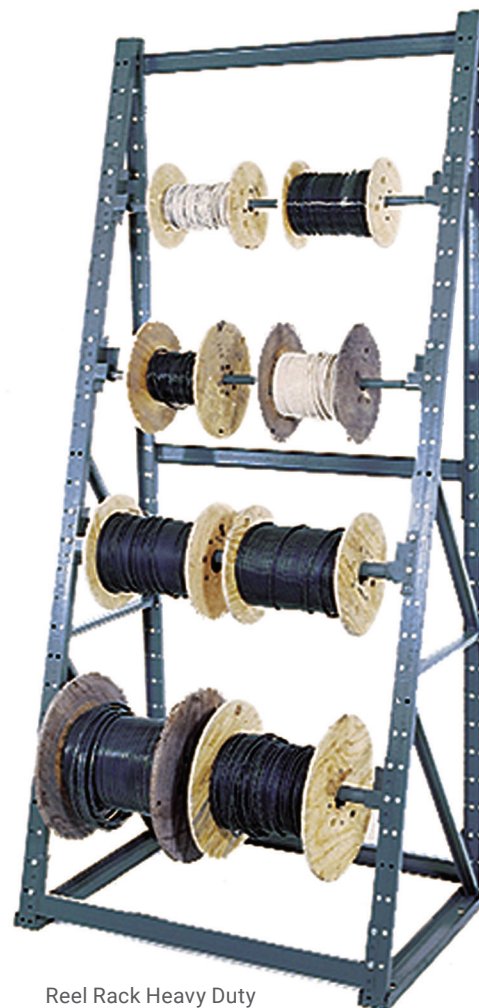

Reel Rack Heavy Duty

Drum Storage Rack

Drum Storage Rack

The Jarke drum racks offer compact, high-density storage of 55 gallon drums. This unit allows for closed drums to be easily transported to a worksite which means avoiding the hazards of transporting small quantities of liquid in open containers.

- 1,200 lbs. to 1,800 lbs. capacity
- The Jarke KD drum rack has the same heavy duty design and high capacity as a welded unit.
- Stack up to 4 tiers high with an interlocking design which gives this rack high capacity and more stability
- Portable and light weight
- Breaks down for easy storage
- Painted high visibility orange
- Forklift accessibility
- An all-welded unit is available



HD-55KD

Model No.	Description	H x L x D (In.)	Capacity (Lbs.)	Wt. (Lbs.)
HD-55KD	Hi-Drum Rack 2 Drum Carriage	12 x 46 x 30	1,200	48

Protective Rail Solutions

One of the most important parts of our business, is protecting yours. Here's how.

A busy warehouse, plant, or distribution center can pose a real challenge when it comes to safety. That's why SPG makes Jarke Steel Sentry® Protective Rail Systems that are designed to withstand the hazards of the workplace – to help make certain that your employees, equipment, and inventory can do the same.

Jarke systems from SPG make it easy for you to create secure, protected spaces within your facilities. From the loading dock to the warehouse...from the factory floor up to the mezzanines and walkways...Jarke protective rail systems can help safeguard your operations and your future.

Contact a SPG Product Specialist for a
Free Solutions Consultation:

customerservice@spgusa.com

877.503.4SPG (4774)

Steel Sentry® Protective Rail Systems

The Jarke line of guardrails, handrails, bollards and guards will help protect valuable equipment and workers from hazards in the workplace. We have two versions of guardrail, either all welded or a bolt together system which allows for lift out access for servicing machinery or equipment.

Guardrail Bolted

- Standard rails are 11ga steel, corrugated rails are 12ga steel
- Create a barrier wall or complete surround
- Single or Double rail system
- Removable rails offer access to machinery for repairs
- High visibility yellow
- Parts can easily be replaced if damaged

Rails bolt in place for added strength

Posts are 4" square 7ga steel

Ships KD (knocked down)

Contact Factory for more sizes

Guardrails

Model No.	Description	Wt. (Lbs.)
SG48R	4' Rail	21
SG72R	6' Rail	32
SG96R	8' Rail	43
SG120R	10' Rail	54


*Rail Dimensions are measured to center line of post, 4" square posts.
 "Any Size" special rail lengths can be ordered to meet your specifications.
 Bolts are included with rail piece.

Guardrails - Rail Systems

Model No.	Description	Wt. (Lbs.)
Single Rail Posts		
1SG1	21" End Post	36
1SG2	21" Intermediate Post	39

Model No.	Description	Wt. (Lbs.)
Double Rail Posts		
2SG1	45" End Post	57
2SGCP	45" Corner Post	62
2SG1F	45" Flush End Post	57

Foot plate 11" x 11" x 1/2" thick with (4) 7/8" diameter lagholes.

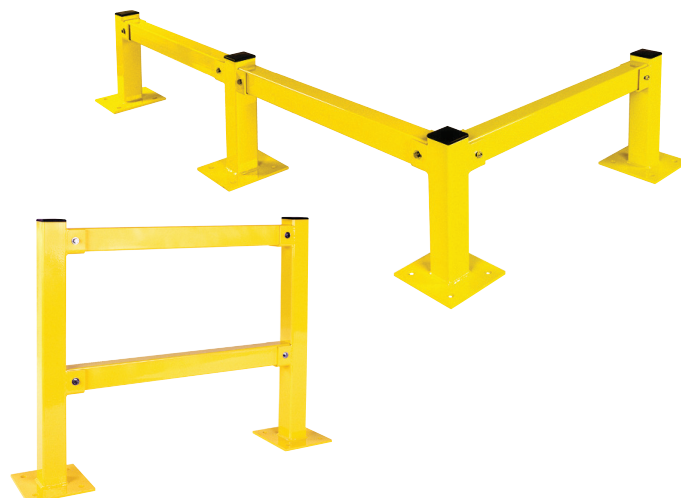

21" End Post



21" 4-Way Post



21" Intermediate Post


Steel Sentry® Protective Rail Systems

Guardrail All Welded


- 4" square tubular 7 gauge steel
- 11" x 11" x 1/2" thick foot plates 7/8" mounting holes
- Select from three heights: 15"H single rail, 29 1/2"H double rail, or 44"H triple rail
- High visibility yellow

Rail Length	Model No.	Wt. (Lbs.)
Double Rail		
8	GR-4D-96	222


Rail Length	Model No.	Wt. (Lbs.)
Triple Rail		
4	GR-4T-48	208
6	GR-4T-72	260
8	GR-4T-96	316



Triple Rail

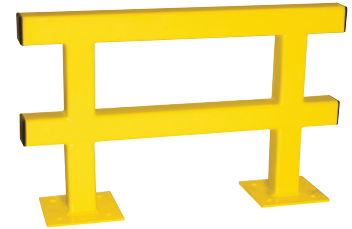

Double Rail



Corner Guardrail

Steel Sentry® Corner Guardrail All Welded


- 7ga steel

Ideal for creating a protective space 42" per side, around equipment or machinery. Available in single, double and triple rail heights, to coordinate with all-welded products.

Post Protector

- 3/16" thick steel
- Protect pallet racking uprights/frames
- Sturdy 1/2" x 6" x 9 1/2" base
- For both Jarke Quiktier and Utilitier

Model No.	Description	Wt. (Lbs.)
PP-12	4 x 12	15

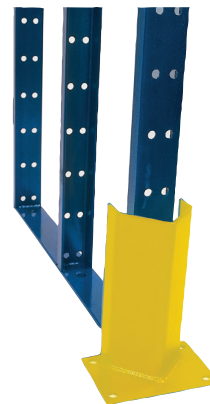


Post Protector

Bollard

- 7ga steel
- 4" sq. post ideal for protection at dock areas
- Three heights: 24", 36", 48"
- Sturdy 1/2" x 11" x 11" base plate
- High visibility yellow

Model No.	Size (In.)	Wt. (Lbs.)
BO-48	48 High	49

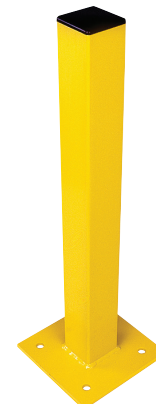

Bollard

Steel Sentry® Protective Rail Systems

Machinery Guard

Model No.	Size (In.)	Wt. (Lbs.)
MG-3642	42 x 36	128



Machinery Guard

Corner Guard

Model No.	Description	Wt. (Lbs.)
CG-24	24" High	39
CG-36	36" High	52



Corner Guard



Overhead Door Track Guard

Overhead Door Track Guards

- Covers overhead door track to prevent damage
- Steel guard is $\frac{3}{16}$ " thick with $\frac{3}{8}$ " thick base plate
- Sold as pairs
- Mounts to wall and floor

Model No.	Description	Wt. (Lbs.)
DT-24	24" Overhead Door Track Guard	50/pr.

The depth of the track containment is 7-3/16"


Steel Sentry® Handrails

- This railing system is most frequently used on mezzanines, walkways or to provide a protective barrier
- 1½" square tube rail all welded steel
- Double tiered 4' sections can be used in a straight line or at 90° angle to make a directional change
- Use with either an end base or an intermediate base
- Easy to install
- High visibility yellow



Handrails

Model No.	Description	W x H (In.)	Wt. (Lbs.)
HR-4248	Hand Rail Assembly	48 x 42	23 1/2
HR-1B	End Base	---	2
HR-2B	Intermediate Base	---	2 1/2



End Base



Intermediate Base

*Anchor bolts not provided.

Ladder Solutions

No one gives you more, or better, ways to take your operation to new heights.

The ladder. It is one of those essential pieces of equipment in any material handling operation. The right ladder can increase productivity, simplify complex tasks, and improve the workflow throughout your facilities. The right ladder is durable, reliable, designed to handle the toughest jobs, offers superior service, and is built to last.

That defines ladders from SPG. While each SPG ladder is unique, they all bring you heavy-duty construction and innovative design features.


Standard on all of these ladders is legendary SPG quality, durability, and value. So, if you want to elevate the performance of your business, choose Gillis ladders from SPG.

Contact a SPG Product Specialist for a
Free Solutions Consultation:

customerservice@spgusa.com

877.503.4SPG (4774)

60° SAF-T™ Standard Angle Ladders

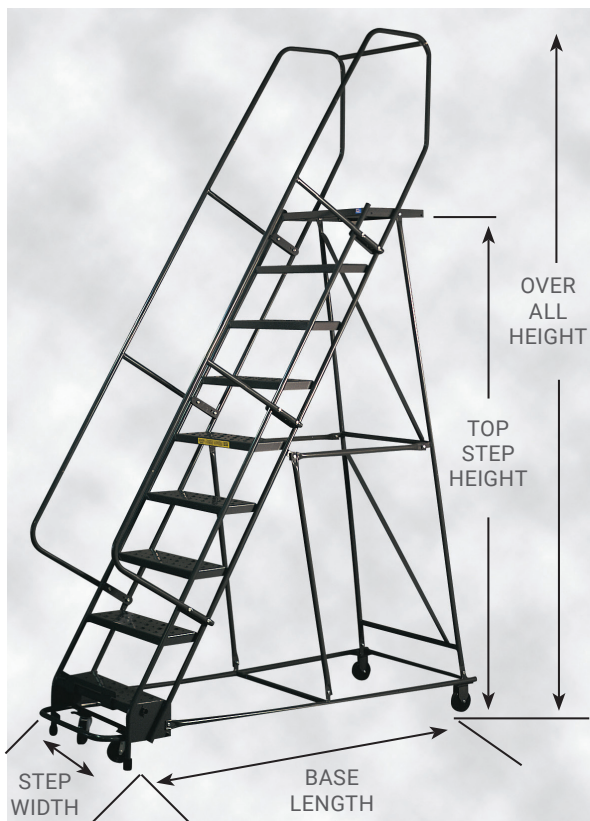


Tread Styles: G-Strut



Safety grating for surest footing when area is slippery or not clean.

G-Perf



Perforated steel tread for normal use where liquids are not present.

G-Strut Model No.	Base W x L (In.)	Wt./Ship Wt. (Lbs.)	# of Steps	Handrail	Knockdown
16" Step Width					
S4R1	22 x 37	53	4	Yes	No
24" Step Width					
S2R2	30 x 24	43	2	Yes	No
S4R2	30 x 37	62	4	Yes	No
S5R2	30 x 44	70	5	Yes	No
S8R2	32 x 68	130	8	Yes	Yes
S9R2	32 x 76	148	9	Yes	Yes
S10R2	32 x 82	164	10	Yes	Yes
S12R2	32 x 96	209	12	Yes	Yes
S14R2	40 x 108	233	14	Yes	Yes
30" Step Width					
S3N3	33 x 32	44	3	No	No
S4R3	33 x 37	67	4	Yes	No
S10R3	36 x 82	183	10	Yes	Yes
S16R3	40 x 121	282	16	Yes	Yes

G-Perf Model No.	Base W x L (In.)	Wt./Ship Wt. (Lbs.)	# of Steps	Handrail	Knockdown
16" Step Width					
P3N1	22 x 32	31	3	No	No
P4N1	22 x 37	37	4	No	No
P2R1	22 x 24	33	2	Yes	No
P3R1	22 x 32	41	3	Yes	No
P4R1	22 x 37	53	4	Yes	No
24" Step Width					
P4N2	30 x 37	50	4	No	No
P2R2	30 x 24	43	2	Yes	No
P3R2	30 x 32	48	3	Yes	No
P4R2	30 x 37	62	4	Yes	No
P8R2	32 x 68	214	8	Yes	Yes
P10R2	32 x 82	266	10	Yes	Yes
P12R2	32 x 96	368	12	Yes	Yes
P16R2	40 x 121	420	16	Yes	Yes
30" Step Width					
P3R3	33 x 32	59	3	Yes	No
P5R3	33 x 44	171	5	Yes	No
P8R3	36 x 68	259	8	Yes	Yes
P10R3	36 x 82	307	10	Yes	Yes
P12R3	36 x 96	382	12	Yes	Yes

** SAF-T Lock has single wheel.

Note: Overall height is platform height plus handrail height.

50° SAF-T™ Standard Angle Ladders

Locking Systems:

Spring loaded caster (4)

For 2–4 step ladders. Retracting spring loaded casters with steel reinforced rubber tip feet

(Standard) SAF-T Lock Locking Systems:

For 5–16 step ladders. Positive SAF-T lock with release secures ladder when an individual steps on the first step triggering the release bar. Caster carriage retracts allowing metal reinforced rubber-tipped feet to grip floor. Step on U-Tube bar and ladder becomes mobile on easy-roll plastic wheels.



Spring Loaded Casters



SAF-T Lock



G-Strut Model No.	Base W x L (In.)	Wt./Ship Wt. (Lbs.)	# of Steps	Handrail	Knockdown
16" Step Width					
D3R1	22 x 35	41	3	Yes	No
D4R1	22 x 45	53	4	Yes	No
24" Step Width					
D3N2	30 x 34	40	3	No	No
D2R2	30 x 25	44	2	Yes	No
D3R2	30 x 34	59	3	Yes	No
D4R2	30 x 45	64	4	Yes	No
D8R2	32 x 90	147	8	Yes	Yes
D10R2	32 x 103	174	10	Yes	Yes
D11R2	32 x 115	189	11	Yes	Yes
D12R2	32 x 121	201	12	Yes	Yes
30" Step Width					
D4R3	33 x 45	68	4	Yes	No
D9R3	36 x 96	184	9	Yes	Yes
D11R3	36 x 115	206	11	Yes	Yes

G-Perf Model No.	Base W x L (In.)	Wt./Ship Wt. (Lbs.)	# of Steps	Handrail	Knockdown
16" Step Width					
PD3R1	22 x 35	41	3	Yes	No
PD4R1	22 x 45	53	4	Yes	No
24" Step Width					
PD3R2	30 x 34	59	3	No	No
PD9R2	32 x 96	258	9	Yes	Yes
30" Step Width					
PD9R3	36 x 96	309	9	Yes	Yes


Options
42" Handrail
21" Deep Top Steep
28" Deep Top Step
SAF-T Lock System
Skid Plate, 1-5 Step
Fold Down Tray
Outriggers 40"
Outriggers 54"

Call SPG to Discuss
Options for your Ladder

6-Wheeler™ Ladders

Pat. No. 5,941,341 All rights reserved.

- Turns on a Dime!
- Ships knocked down (KD)
- Double-Deep Top Step
- Ideal for applications with narrow aisles or confined space
- Casters
 - > 2 (4") Swivel-Front
 - > 2 (4") Rigid-Back
 - > 2 (6") Rigid-Center
- Handrails
 - 30" 7–12 Steps
 - 42" 13–16 Steps
- Turns in 1/2 the Radius of Standard Ladders



All Ladders are Painted Blue



"6-Wheeler" SAF-T lock retracts middle and front casters for climbing safety.

60° Standard Angle "6-Wheeler"™

G-Strut Model No.	Base W x L (In.)	Wt./Ship Wt. (Lbs.)	# of Steps
24" Step Width			
S12R2-RT	32 x 96	215	12
30" Step Width			
S15R3-RT	40 x 115	278	15

G-Perf Model No.	Base W x L (In.)	Wt./Ship Wt. (Lbs.)	# of Steps
24" Step Width			
P8R2-RT	32 x 68	251	8
P9R2-RT	32 x 76	275	9
P12R2-RT	32 x 96	374	12
30" Step Width			
P14R3-RT	40 x 108	425	14

50° SAF-T Angle "6-Wheeler"™

G-Strut Model No.	Base W x L (In.)	Wt./Ship Wt. (Lbs.)	# of Steps
24" Step Width			
D8R2-RT	32 x 90	154	8
30" Step Width			
D9R3-RT	36 x 96	196	9


G-Perf Model No.	Base W x L (In.)	Wt./Ship Wt. (Lbs.)	# of Steps
24" Step Width			
PD11R2-RT	32 x 115	304	11
30" Step Width			
PD10R3-RT	36 x 103	333	10

The Multi-Directional™ Ladders

The NEW Gillis "Multi-Directional Ladder"™ is easy to maneuver and ergonomically friendly. With one simple push this ladder will go any direction you want it — a real time saver!

- Ships knocked down (KD)
- Double-Deep Top Step
- Step width is 24"
- Available in either grip strut or perforated step designs
- 50° SAF-T Angle and 60° Standard Angle styles
- (4) 4" swivel casters
- Includes 30" Handrail
- Overall height (O.A.) is platform height plus handrail height

All Ladders are Painted Blue

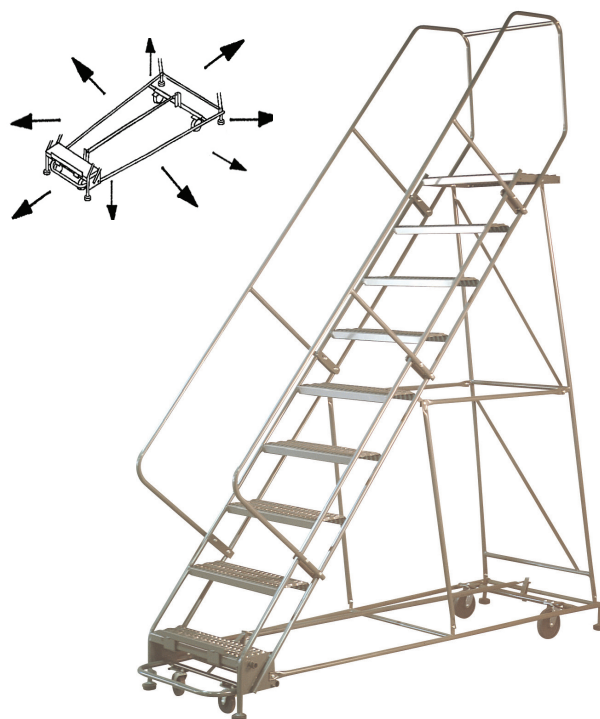

50° SAF-T Angle Multi-Directional Style

No. Steps	Plat. Ht. (In.)	O.A. Ht. (In.)	G-Strut Model No.	Base W x L (In.)	Wt./Ship Wt. (Lbs.)
6	60	93	D6R2-MD	32 x 68	110
7	70	103	D7R2-MD	32 x 76	131
10	100	133	D10R2-MD	32 x 103	174

Locking System: (Std.) SAF-T Lock

Positive SAF-T lock with release secures ladder when an individual steps on the first step triggering the release bar. Caster carriage retracts allowing metal reinforced rubber-tipped feet to grip floor. Step on U-Tube bar and ladder becomes mobile on easy-roll wheels.




60° Standard Angle Multi-Directional Style

No. Steps	Plat. Ht. (In.)	O.A. Ht. (In.)	G-Strut Model No.	Base W x L (In.)	Wt./Ship Wt. (Lbs.)
6	60	93	S6R2-MD	32 x 55	109/189

No. Steps	Plat. Ht. (In.)	O.A. Ht. (In.)	G-Perf Model No.	Base W x L (In.)	Wt./Ship Wt. (Lbs.)
12	120	153	P12R2-MD	32 x 96	209/368


Step Treads: G-Strut

Safety grating for surest footing when area is slippery or not clean.



G-Perf

Perforated steel tread for normal use where liquids are not present.



Specialty Ladders

Mobile Mechanics Ladders

- Features 21" deep top platform
- Access chain with detachable closure
- Handles provide easy mobility
- 4" rigid casters in rear
- In G-Strut or G-Perf tread
- 60 degree angle

All Ladders are Painted Blue

No. Steps	Plat. Ht. (In.)	O.A. Ht. (In.)	G-Strut Model No.	Base W x L (In.)	Wt. (Lbs.)
24" Step Width					
4	40	73	M4R2	30 x 50	82
5	50	83	M5R2	30 x 57	89
7	70	103	M7R2	30 x 71	103

No. Steps	Plat. Ht. (In.)	O.A. Ht. (In.)	G-Perf Model No.	Base W x L (In.)	Wt. (Lbs.)
24" Step Width					
5	50	83	MP5R2	30 x 57	89
6	60	93	MP6R2	30 x 64	96
7	70	103	MP7R2	30 x 71	103



M5R2 Mobile Mechanics Ladder

Truck-N-Maintenance™ Ladders

- 50 degree climbing angle ideal for loading and unloading small packages from a truck
- 10" Semi-pneumatic wheels in the rear with skid plates on the front 2 legs
- 21" deep top step standard. Add suffix "-C" for a 28" deep top step
- 450 lb. capacity
- Available with welded crossbar for normal applications or w/chain guard for walk-thru applications

All Ladders are Painted Blue



TH4R2X
Truck-N-Maintenance Ladder

Chain Crossbar

No. Steps	Plat. Ht. (In.)	O.A. Ht. (In.)	G-Strut Model No.	Base W x L (In.)	Wt. (Lbs.)
16" Step Width					
3	30	63	TH3R1X	27 x 52	82
4	40	73	TH4R1X	27 x 60	90
24" Step Width					
3	30	63	TH3R2X	36 X 52	99
4	40	73	TH4R2X	38 X 60	107
5	50	83	TH5R2X	38 X 68	115

Chain Crossbar

No. Steps	Plat. Ht. (In.)	O.A. Ht. (In.)	G-Perf Model No.	Base W x L (In.)	Wt. (Lbs.)
24" Step Width					
3	30	63	PTH3R2X	36 X 52	99
4	40	73	PTH4R2X	38 X 60	107

Welded Crossbar

No. Steps	Plat. Ht. (In.)	O.A. Ht. (In.)	G-Strut Model No.	Base W x L (In.)	Wt. (Lbs.)
16" Step Width					
4	40	73	TH4R1	27 x 60	90
5	50	83	TH5R1	27 x 68	98
24" Step Width					
5	50	83	TH5R2	38 X 68	115

Specialty Ladders

Truck-N-Dock™ Ladders

- Designed with removable side and back chains for easy loading and unloading from any direction
- Large 36" x 48" top platform and 50 degree climbing angle are ideal for maximum efficiency
- Standard with our heavy duty G-strut tread for a 500 lb. capacity
- Front SAF-T Lock with 2 1/2" diameter rubber pads are standard along with 10" semi-pneumatic rear wheels for rough surfaces

No. Steps	Plat. Ht. (In.)	O.A. Ht. (In.)	Model No.	Base W x L (In.)	Wt. (Lbs.)
36" Step Width					
4	40	73	TD4R34L	46 x 81	228
5	50	83	TD5R34L	46 x 90	244
6	60	93	TD6R34L	46 x 99	260

May require special LTL carrier, Maximum height is 96" on most trailers.

All Ladders are Painted Blue



TD4R34L Truck-N-Dock Ladder

Crossover Ladders

- Use as a stairway over conveyors or other obstacles
- For permanent or temporary installations
- Foot plates can be bolted to the floor for permanency
- Heavy duty, all-welded construction
- 24" wide steps in slip-resistant G-Strut tread or standard G-Perf tread
- Ships in one piece, already assembled
- 50 degree angle

All Ladders are Painted Yellow

Contact a SPG Product Specialist for Ordering and a Free Solutions Consultation:

customerservice@spgusa.com
877.503.4SPG (4774)



S5CR2C 50° Crossover Ladder

Specialty Ladders

Office Ladders

- Solid steel rubber covered steps
- 55 degree climb angle
- 10" deep top step—Other steps 7" deep
- Beige unless specified—Gray-Blue available
- 16" wide steps
- 20" top step available

No. Steps	Plat. Ht. (In.)	O.A. Ht. (In.)	Handrail Ht. (In.)	Model No.	Base W x L (In.)	Wt. (Lbs.)
No Handrail - All Welded (set-up) 4-3" Retractable Spring Casters						
1	13	13	NA	F1N1	20 x 16	14
3	30	30	NA	F3N1	21 x 29	26

* Ships UPS boxed with no extra packaging charges. Others ship on a pallet at no additional charge.



F3N1 Office Ladder

Work Platforms

- 500 lb. Capacity
- Set up all-welded
- 55 degree climb angle
- G-Strut Steps
- Rear legs have 4" rigid caster
- Front legs have 2 1/2" diameter rubber pads
- SAF-T Lock System available

For base widths, add 3" to platform widths.
For base lengths, add to platform lengths - 8" for 2-Step models, 14" for 3-Step, 21" for 4-Step and 28" for 5-Step.



W3R23 Work Platform

Contact a SPG Product Specialist for Ordering and a Free Solutions Consultation:

customerservice@spgusa.com
877.503.4SPG (4774)

Specialty Ladders

Heavy Duty Fixed Steel Ladders

Standard Style

- $\frac{3}{4}$ " schedule 40 pipe ($1\frac{1}{16}$ " diameter) side rails
- 18" wide x $\frac{3}{4}$ " solid round serrated rungs
- $\frac{1}{4}$ " x 2" flat standoffs hold ladder 7" from wall
- Painted yellow. Other colors available

Walk-Thru Style

(In Addition to Standard Style Features)



- 42" Walk-Thru extension complete with handrails for easy access and exit from the ladder
- 24" wide overall. 18" wide ladder rungs
- Walk-Thru base is suitable for roof top mounting

Standard Style - No Cage			
No. Rungs	Rung Ht. (In.)	Model No.	Wt.Ship Wt. (Lbs.)
6	5	S6	32/77
10	9	S10	50/110

Standard Style - With Cage			
No. Rungs	Rung Ht. (In.)	Model No.	Wt.Ship Wt. (Lbs.)
25	24	SC25	283/486

Walk-Thru Style - No Cage			
No. Rungs	Rung Ht. (In.)	Model No.	Wt.Ship Wt. (Lbs.)
4	3	W4	43/131
5	4	W5	47/135
6	5	W6	52/161
8	7	W8	61/181
10	9	W10	70/190
11	10	W11	75/195

Walk-Thru Style - With Cage			
No. Rungs	Rung Ht. (In.)	Model No.	Wt.Ship Wt. (Lbs.)
13	12	WC13	149/277
17	16	WC17	195/384

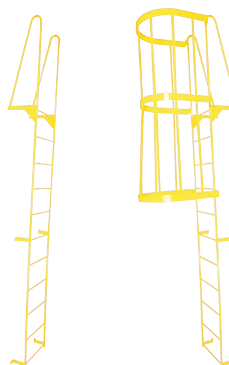

Platform Solutions

Step up to a higher level of quality, durability and value.

Greater profitability, efficiency, productivity, and safety are all within your reach when you put Gillis-Jarke platforms from SPG to work in your facilities. We offer you the platform options you need to handle the toughest jobs in the toughest work environments.

While the uses of our platforms may vary, each offers you superior stability, sturdiness, durability and versatility. Whether you use our platforms for maintenance work, inventory control, manufacturing, order picking, repair work or a wide variety of other applications, Gillis-Jarke has the solutions you need to improve the performance of your entire operation.

All of our work platforms help you eliminate the time-consuming need to set up ladders and scaffolds. But, that's only the beginning.

**Contact a SPG Product Specialist for a
Free Solutions Consultation:**

customerservice@spgusa.com

877.503.4SPG (4774)

Forklift Aerial Platforms

Forklift Aerial Platforms

- 1000 lb. capacity
- Deck is heavy duty 10 gauge diamond plate
- 4" high toe guards all sides
- Mast chain included
- OSHA / ANSI compliant, CAL-OSHA riser option available
- Side protection
 - > 42" high guard rails — 2 sides
 - > Truckside is expanded metal
 - > Entry side is either double chain or latching swing gate

Model No.	Platform W x D (In.)	Forklift Pockets (In.)	Inner Dim. Between Forklift Pockets	Overall Ht. (In.)	Wt. (Lbs.)	Gate Type
All Welded (Set-Up) - Without Casters						
FWP36S	36 x 36	2 1/2 x 8	16 1/2	65	143	Swing
FWP43S	42 x 36	2 1/2 x 8	18	65	155	Chain
Knocked Down (KD) - Without Casters						
FWP34	36 x 48	2 1/2 x 8	16 1/2	45	186	Swing
FWP44	48 x 40	2 1/2 x 8	20 1/2	45	197	Chain



Swing gate type shown with optional tool tray




Model FWP44 shown with optional light bulb caddy, riser, tool tray and casters

Platform Accessories

Description
Casters
Tool Tray
24" Screen Riser
Light Bulb Caddy
Cal-Osha Riser



Casters



24" Screen Riser



Shown with optional cal-oshra riser



Tool Tray



Light Bulb Caddy

Adjustable 1-Step Platforms

- Available with our G-Strut tread for wet or oily environments or with recessed ergonomic matting for comfort
- Easily adjust the threaded inserts for proper height
- Ergonomic matting is ideal for machine operators or anyone on their feet for long periods of time
- Adjustable from 5–8 inches or 9–14 inches

Color: Blue

Model No.	Base W x L	Mat	Adjustable Height	Weight
W1N26-5	24 x 72	No Mat	5" - 8"	78
WSE1N23-5	24 x 36	With Mat	5" - 8"	36
W1N22-9	24 x 24	No Mat	9" - 14"	24
W1N23-9	24 x 36	No Mat	9" - 14"	34
W1N24-9	24 x 48	No Mat	9" - 14"	54



Optional Ergonomic Matting Model



Adjustable 1-Step Platform

* Ships UPS with 70lb. minimum charge.

Industrial Cart Solutions

More choices and superior performance to really get your business rolling.

What sets SPG carts apart from all the rest? Unique design features, quality construction, value driven price points, generous capacities, proven durability, unique models designed for specific applications, and versatile models engineered to handle any job you've got. We make all of this available to you.

But, what really sets our carts apart is the company that brings them to you. Beyond a broad selection, beyond the ruggedness, quality, and low cost, we offer you superior service that can rush you the equipment you need, and the technical support so essential both before and after purchase.

Contact a SPG Product Specialist for a
Free Solutions Consultation:

customerservice@spgusa.com

877.503.4SPG (4774)

Utility Carts & Work Benches

2-Shelf Shop Trucks

- Shelves made of heavy gauge steel
- 1,000 lb. capacity
- Ergonomic offset handle
- Unique quick release keyslot caster brackets standard
- 5" rubber casters standard (2 rigid and 2 swivel)
- Powder coat finish
- F.O.B. IL
- Top shelf is 25" above floor
- 16" bottom to top shelf opening

Available Based on Size & Quantity. Contact SPG:

customerservice@spgusa.com

877.503.4SPG (4774)



Drawer Service Carts

- 1,000 lb. capacity
- Two drawers 20"D x 14"W x 5"H with keylock. 1 1/2" deep shelves. Push handle. Comes standard with 2-rigid and 2-swivel casters which mount in our quick release keyslot caster brackets
- Powder coat finish
- F.O.B. IL

Available Based on Size & Quantity. Contact SPG:

customerservice@spgusa.com

877.503.4SPG (4774)



Work Benches

- Made of heavy gauge steel
- Stationary or Mobile
- Top shelf with 1 1/2" retaining wall on 3 sides, front side lip down for easy access
- Lower half shelf is 15" deep with 4" high back
- Heavy duty tubular corner construction
- 22" clearance between shelves
- 2-rigid and 2-swivel/brake 5" polyurethane casters
- Powder gray coat finish
- F.O.B. IL

Available Based on Size & Quantity.

Contact SPG:

customerservice@spgusa.com

877.503.4SPG (4774)



Stock Carts

Rolling Service Stock Carts

- Made of heavy gauge steel
- Standard push handles
- Unique quick release keyslot caster brackets with two 5" rigid and two 5" swivel casters, rubber
- 2 or 3 shelf units with 1½" lip
- 1,000 lb. capacity
- For smooth on and off loading, order lips down suffix "LD"
- Gray finish
- F.O.B. IL

With 1½" Lip Up

D x W x H (In.)	Model No.	Wt. (Lbs.)
2-Shelf Units		
18 x 30 x 35	GRSC1830-2R	58

Other Sizes Available Based on Size & Quantity. Contact SPG:

customerservice@spgusa.com

877.503.4SPG (4774)



With 1½" Lip Up

Ladder Carts

- Heavy gauge steel
- 2-step spring loaded ladder standard, grips floor when stepped on
- Tiered shelf design standard to maximize space and maneuverability
- 2 rigid and 2 swivel 5" rubber casters
- 1½" lip up on all shelves
- Drawer option add suffix "D"
- Powder coat paint finish
- F.O.B. IL
- 1,000 lb capacity

Available Based on Size & Quantity. Contact SPG:

customerservice@spgusa.com

877.503.4SPG (4774)



Shelf Carts

3-Sided Carts

- Bases made of heavy gauge steel
- 1400 lb. total capacity
- Height is 48" above the deck
- Push handle
- Additional shelves available
- 2 swivel and 2 rigid 5" x 2" phenolic casters
- Orange finish
- F.O.B. IL

Available Based on Size & Quantity. Contact SPG:

customerservice@spgusa.com

877.503.4SPG (4774)



Open Portable Shelf Cart

- All welded construction made of 1" square tubing with 1/2" rods on sides and back
- Heavy gauge steel shelves slope from front to back
- 14" clearance between shelves
- Standard 6" x 2" polyurethane casters (2-swivel, 2-rigid)
- 2400 lb. total capacity
- 61" overall height
- GREY finish.
- F.O.B. IL.

Available Based on Size & Quantity. Contact SPG:

customerservice@spgusa.com

877.503.4SPG (4774)



Security Units

Stationary Security Units

- All-welded heavy gauge steel construction
- Expanded metal sides and backs
- Easy locking handle
- Gray finish
- F.O.B. IL.



with doors open

D x W x H (In.)	Stationary Security Units			
	Carts		With Extra Shelf	
	Model No.	Wt. (Lbs.)	Model No.	Wt. (Lbs.)
24 x 60 x 72	GSSU2460-2	315	GSSU2460-3	355

Other Sizes Available Based on Size & Quantity. Contact SPG:

customerservice@spgusa.com

877.503.4SPG (4774)



GSSU3048-2

Mobile Security Units

- All-welded heavy gauge steel construction
- Expanded metal sides and backs
- Easy locking handle
- Gray finish
- 5" x 2" phenolic casters
- F.O.B. IL.

Available Based on Size & Quantity. Contact SPG:

customerservice@spgusa.com

877.503.4SPG (4774)



Mobile Security Unit
With extra shelf



Mobile Security Unit
w/optional fork pockets

Gas Storage

Horizontal Storage Units

- Holds 20, 30, or 40 Lb. cylinders

Gas Cylinder Storage Units

- All welded (SU) or Knocked Down (KD)
- Sides are 13-gauge expanded metal
- 16-gauge solid steel roof
- Corner posts are 12-gauge
- Padlock loop & hinges
- Pre-drilled legs to anchor to floor
- Painted safety yellow with red legend: "Flammable-Keep Away From Flame"
- Meets all OSHA requirements and NFPA standards
- F.O.B. IL.



Vertical Storage Units

- Safety chains
- Holds cylinders up to 200 Lbs.

D & W & H (In.)	All Welded Set-Up (SU) Model No.	Cylinders Stored	Wt. (Lbs.)
Horizontal Storage Unit			
32 x 38 x 70	GCH8SU	8	280
Vertical Storage Unit			
32 x 38 x 70	GCV510SU	5 to 10	204



Platform Trucks

Heavy Duty All-Welded Platform Truck

- 2,000 lb. Capacity
- Made of heavy gauge steel
- 2-swivel and 2-rigid 8" x 2" mold-on rubber wheels rated at 500 lbs. per caster
- Gray finish
- F.O.B. IL.

D & W (In.)	Model No.	Wt. (Lbs.)
24 x 48	GHDPT2448	130
30 x 60	GHDPT3060	150



GHDPT2448

Pallet Trucks

Heavy Duty Red Hand Pallet Truck

- 7 1/2" x 2" Polyurethane wheels with aluminum core dissipate heat for increased wheel life in high use applications
- Adjustable push rods and reinforced forks
- Articulating axle adjusts automatically to ensure load stability over uneven surfaces or small debris
- Powder coated red
- F.O.B. IL
- Adjustable push rods and reinforced forks



Heavy Duty Hand Pallet Truck

Fork Size W x L (In.)	Model No.	Lowered Ht. (In.)	D & W (In.)	Wt. (Lbs.)
27 x 48	IE2748-55HC	2.9	7.5 x 2	180

Lift Tables & Trucks

Foot Pump Scissor Lift Tables

- Lift & transport design
- Polyurethane fixed & swivel wheels
- Upper lifting limit bypass
- Dual brake system on each model

Available Based on Size & Quantity. Contact SPG:

customerservice@spgusa.com

877.503.4SPG (4774)



*Has a double scissor lift to reach the additional raised height.

Manual Lift Truck

The Manual Hi-Rise Skid Lift Truck is a manually operated high lift truck designed to handle applications such as lifting and transporting skids and bottomless containers, loading and unloading conveyor systems

- Well suited for use as a mobile work station
- Built to work like a Stacker and Pallet Truck combined, the ergonomic design of the truck helps prevent bending and back injuries thereby reducing costly workmen's compensation claims

Contact a SPG Product Specialist for Ordering and a Free Solutions Consultation:

customerservice@spgusa.com

877.503.4SPG (4774)



Model No.	Load Capacity W x L (Lbs.)	Lowered Ht. (In.)	Raised Ht. (In.)	Overall Fork Width (In.)	Fork Length (In.)	Fork Width (In.)	Handle Height (In.)	Steer Wheel (In.)	Roller (In.)	Wt. (Lbs.)
IMHLT2200	2,200	3.3	31 1/2	27	45	6.3	48 1/4	7 1/2 x 2	3 x 2	375

Specialty Carts

Panel & Lumber Cart

This well-engineered cart gives Jarke the edge. This cart is sized for standard lengths of lumber, plywood and other hardware items. The lumber cart promotes self-service in retail businesses.

- 1,200 lbs. capacity
- All-welded steel construction
- Smooth steel deck to prevent product damage
- Choice of wheels
- Painted high visibility orange
- Minor assembly required
- Cart Dimension 26" W x 30" D x 44³/₄" H
- Other sizes available upon request

Model No.	Description	Wt. (Lbs.)
UC2630-P1	Cart w/5" Phenolic Wheels: 2 Swivel, 2 Rigid	88
UC2630-P2	Cart w/5" Phenolic Wheels: 4 Swivel	88
UC2630-L1	Cart w/5" Polypropylene Wheels: 2 Swivel, 2 Rigid	88



Mobile Pipe Cart

The mobile pipe cart serves as the perfect portable cart for the storage and transport of long materials. The sturdy all-welded arms create eight separate levels allowing storage and transport of pipe, conduit, steel fabricated parts, or other hard-to-handle items. Arm end stops retain round or unstable items from falling off arms. Shelves are a graduated depth from top to bottom:

- 12", 14", 16", 20".
- 1,000 lbs. capacity
- Tubular in design
- Load levels widen from 12" at the top level to 18" at the base
- Low overall height storage allows a person to reach and lift manually
- Portable - for multiple uses
- Standard (2) 5" swivel and (2) 5" rigid casters supplied
- Ships unassembled for freight savings
- Shelves are optional and do not come with unit



Model No.	Description	L x W x H (In.)	Wt. (Lbs.)
MO-559	Pipe Rack	50 x 43 x 69	172
MO-559-1-2	Lower Pan	50 x 15 13/16 x 3 1/16	15 1/2
MO-559-1-1	Base Pan	50 x 20 1/16 x 3 1/16	18 1/2

Mail Carts


Mail/Record/Chart Carts

File capacity 80–120 legal folders. 2 removable baskets. Adjustable hanging file folder guide rails for use of legal or letter size folders. Non-marking casters. Contents visible from all sides...no lost or hidden items. Light weight...but rugged $\frac{7}{8}$ " tube construction. Chrome plated...for long lasting durability.

Cart Size W x L (Lbs.)	Model No.	Top Size W x L x H	Baskets Bottom W x L x H (In.)	Casters Front	Casters Back	Wt. (Lbs.)
19 x 27	LS-2	17 x 25 x 11	17 x 25 x 7	4" Swivel	4" Rigid	41
23 x 30	LS-3	17 x 25 x 11	17 x 25 x 7	5" Swivel	10" Semi-Pneumatic	52
23 x 41	LS-4	17 x 36 x 11	17 x 36 x 7	5" Swivel	10" Semi-Pneumatic	60



LS-4

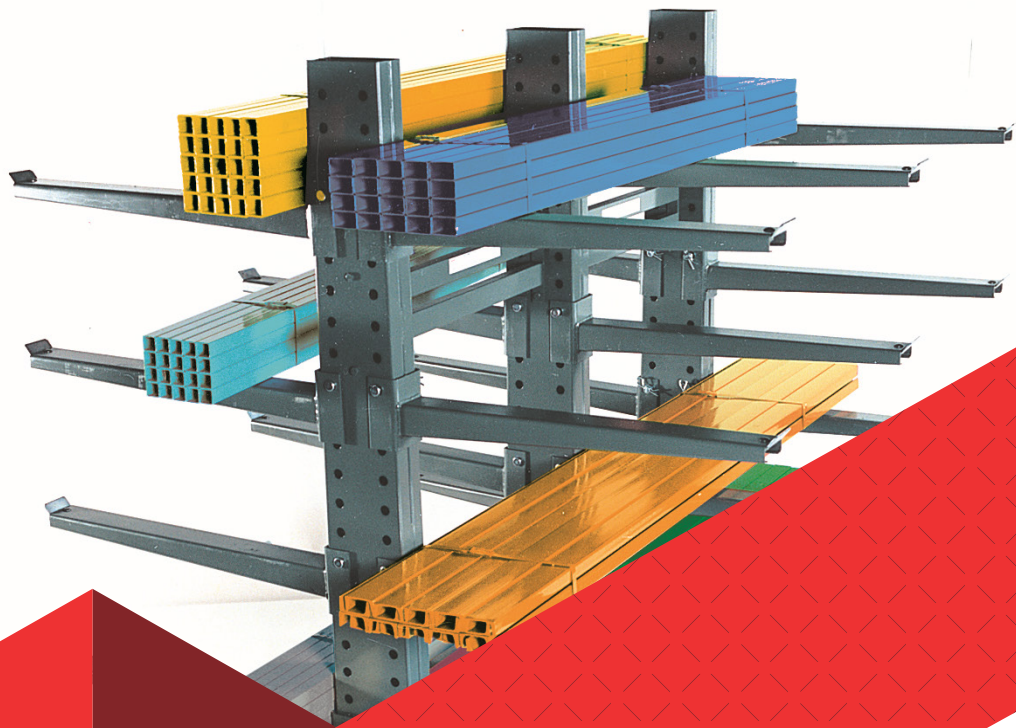

Maximizing efficiency, improving performance, getting more out of your people and your investment — it's what you must do every day to make your business more successful and more profitable. And it's what SPG helps you achieve through our extensive line of innovative food service equipment.

At SPG, our equipment is ergonomically designed to minimize the time, movement and effort of your staff—while maximizing the efficiency of every inch of your available space. We use the best materials for the job and manufacture to strict tolerances to ensure our equipment provides lasting performance and enduring value.

As a global company, we manufacture ISS, Kelmax, Freestyle and other quality storage product lines throughout North America and the Pacific. As a result, our products are delivered to businesses throughout the world every day...and every day we continue to deliver on our promise to ensure their continuing success and profitability.

CONTACT SPG

For SPG's complete product menu, visit spgusa.com or contact us:

 877.503.4SPG (4774)

 GAinfo@spgusa.com

 SPG International, LLC
World Headquarters
3340 Peachtree Rd Suite 1250
Atlanta, Georgia 30326